


Marine Ignition Switches



M-489

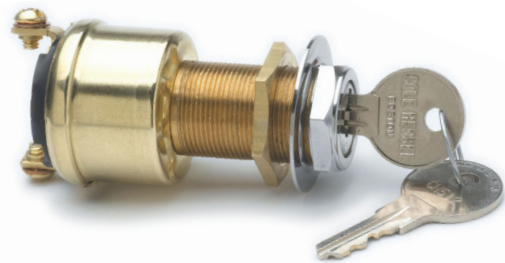

M-850



M-550

Description

Impact-resistant body cannot rust or corrode. Ignition switch operates like traditional switches: the ‘Run’ position actuates radio, radar, blower, lights, and other accessories. Fits most OEM applications.

Features and Benefits

- Replaces many boat ignition switches. Fits into standard 7/8" or 1" hole.
- For added security, switches have individual key codes. Compare with other products in which one key fits every switch of the same model.
- Corrosion-resistant nickel-plated silver screw terminals have high electrical conductivity. Screw terminals give more reliable connections that are less likely to loosen due to vibration.

Web Resources

Download 2D print, installation guide and technical resources at: littelfuse.com/marineignitionswitches

Specifications Overview

Voltage:	6-36V DC
Amperage:	15A Ignition 5A Start
Positions:	2 or 3 Positions
Ignition Run:	10A/12V DC
Terminals:	2 or 3 Screw
Terminal Material:	Nickel-Plated Silver
Mounting Stem:	M-489: Fits panels up to 1" thick with 1" hole M-550: Fits panels up to 1" thick with 1" hole M-850: Fits panels up to 7/8" thick with 7/8" hole

Cross Reference

Fits many boats: Baja, Celebrity, Chapparral, ChrisCraft, Crestliner, Crownline, Four Winns, Larson, Luhrs, Mariah, Powerquest, Rinker, S2 Yachts, Silverton Yacht, Thompson, Thunderbird (Formula), Wellcraft.

Suitable replacement for:
General/Marine Works 3976, 4107
Sierra 18-1803, 18-1802
Pollak 33-105
Johnson 393301
Evinrude 508180
Mercury 87-17009AZ, 87-88107

Ordering Information

BULK	BOXED	RETAIL	Description
M-489	—	M-489-BP	Installs in panels up to 1" thick. 12V DC, Ignition 5A, Start 5A, 2 Positions
M-550	M-550-BX	M-550-BP	Installs in panels up to 1" thick. 12V DC, Ignition 5A, Start 5A, 3 Positions
M-850	M-850-BX	M-850-BP	Installs in panels up to 7/8" thick. 12V DC, Ignition 5A, Start 5A, 3 Positions