CAD GENERATED DRAWING - NO PENCIL CHANGES ALLOWED

NOTES:

1. DIODE 1 AMP; 400 PIV

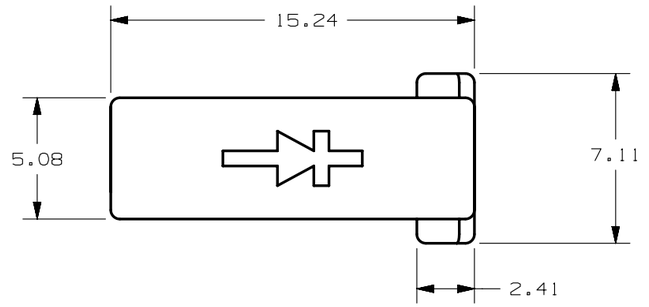

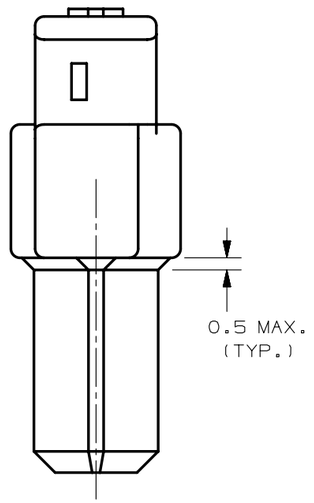

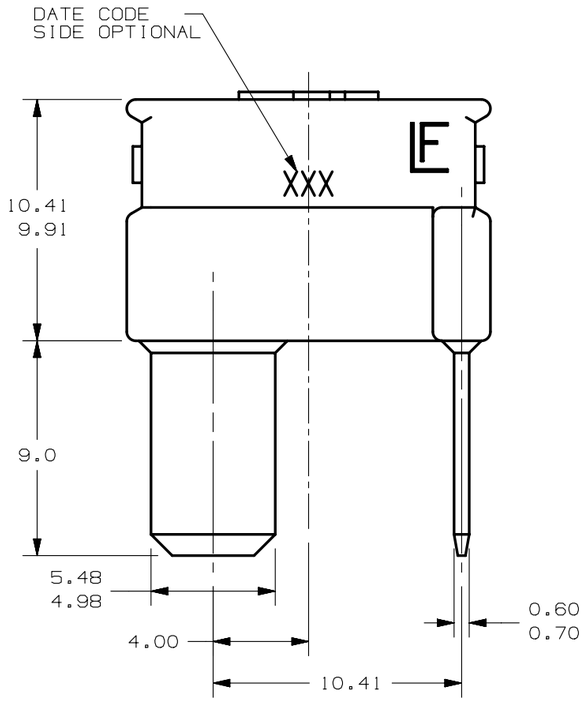



FULL SIZE

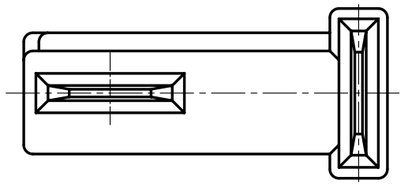

METRIC

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN BRACKETS [ ] ARE INCHES

UNLESS OTHERWISE SPECIFIED, DIMENSIONS DO NOT INCLUDE PLATING.

◎ CPK — DENOTES CRITICAL CHARACTERISTICS.

CPK — DENOTES CPK DIMENSIONS, -MINIMUM CPK VALUE

ST — DENOTES A CHARACTERISTIC THAT PROVIDES AN INDICATION OF PROCESS PERFORMANCE. PROCEDURE FOR MEASUREMENT AND TRACKING TO BE DEFINED IN LITTELFUSE INSPECTION INSTRUCTIONS

CP — DENOTES CP DIMENSIONS, -MINIMUM CP VALUE MUST BE WITHIN THE DIMENSIONAL LIMITATIONS SHOWN ON DRAWING AND INITIALLY LOCATED TO ALLOW FOR MAXIMUM TOOL LIFE

NO	COMPONENT NO	DESCRIPTION	QTY/M	U/M

BILL OF MATERIAL

MATL SPEC

FINISH

COPIES TO

1	9	18
2	10	19
3	12	20
4	13	21
5	14	23
6	15	33
7	16	43
8	17	53

DRW	G. KERN	10/20/97
CHK		DATE
APPD		DATE

SCALE 4:1

SUPER DR

FINISH GOOD WT GRAMS/PIECE

TOLERANCE UNLESS OTHERWISE SPECIFIED
THREE PLACE DEC +/-.100
ANGULAR +/-1°
TWO PLACE DEC +/-.25
ONE PLACE DEC +/-.3

3RD ANGLE PROJECTION

TITLE: DIODE ASSEMBLY

Littelfuse
DES PLAINES, ILLINOIS 60016

REVISION: J

DRWG. NO. 02400103Z

OUTLINE

LTR	DATE	REVISION	CHK	APD
E	10/16/97	38698C-REVISED & REDRAWN IN NEW STRUCTURE GNK		
F	04/24/02	82123D-CHG. TOLERANCES PJM		
G	11/14/07	85439D-REDRAWN IN UG 4.00 WAS 4.11 GMB		
H	07/30/14	510838ECA-UPDATE NOTES OPL		
J	04/23/15	511815ECA-CHANGE THE LOCATION OF THE "LF" LOGO & DATE CODE OPL		