CAD GENERATED DRAWING - NO PENCIL CHANGES ALLOWED

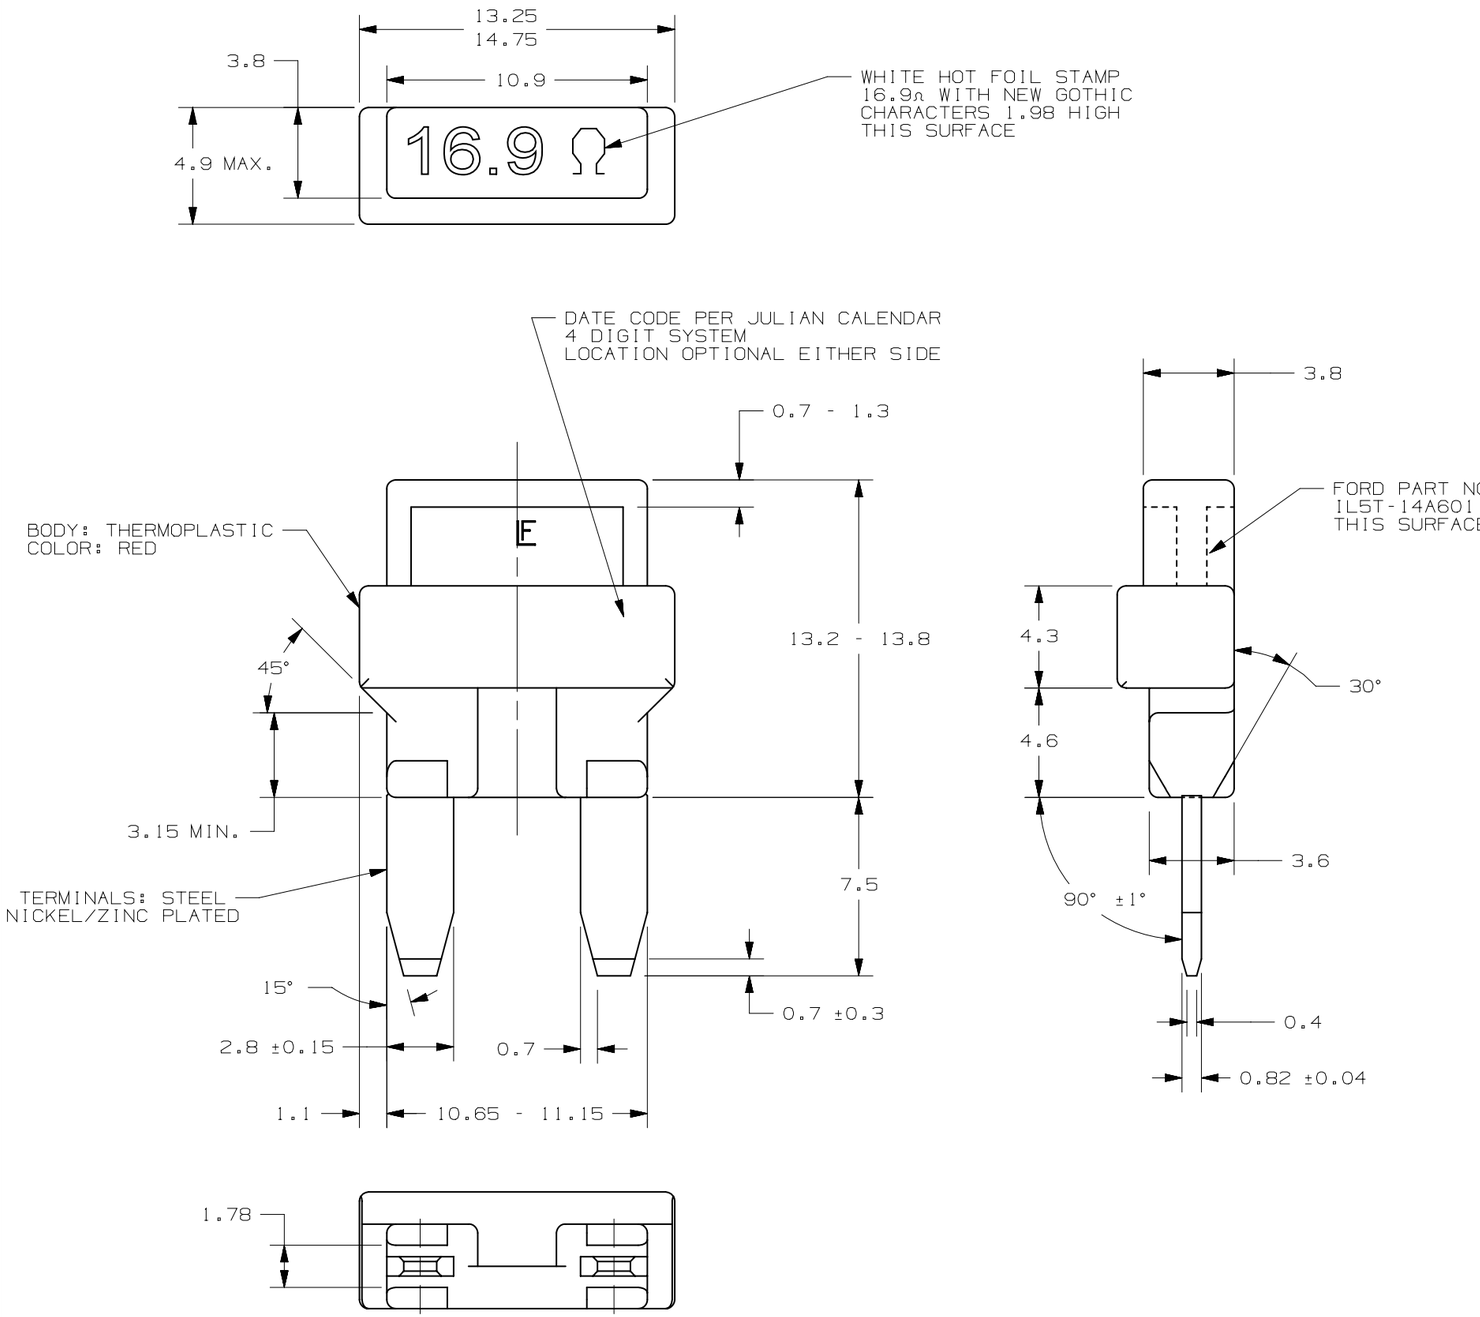


NOTES:

1. RESISTOR: 16.9 OHMS ±1% 1/4 WATT (METAL FILM)

METRIC

| NO | COMPONENT NO | DESCRIPTION | QTY/M | U/M |
|---|---|---|---|---|

BILL OF MATERIAL

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN MILLIMETERS.
DIMENSIONS IN BRACKETS [ ] ARE INCHES
UNLESS OTHERWISE SPECIFIED, DIMENSIONS DO NOT INCLUDE PLATING.

◎ DENOTES CRITICAL CHARACTERISTICS.

CPK DENOTES CPK DIMENSIONS, -MINIMUM CPK VALUE

ST DENOTES A CHARACTERISTIC THAT PROVIDES AN INDICATION OF PROCESS PERFORMANCE. PROCEDURE FOR MEASUREMENT AND TRACKING TO BE DEFINED IN LITTELFUSE INSPECTION INSTRUCTIONS

CP DENOTES CP DIMENSIONS, -MINIMUM CP VALUE MUST BE WITHIN THE DIMENSIONAL LIMITATIONS SHOWN ON DRAWING AND INITIALLY LOCATED TO ALLOW FOR MAXIMUM TOOL LIFE

MATL SPEC

FINISH

COPIES TO: 1 9 18 / 2 10 19 / 3 12 20 / 4 13 21 / 5 14 23 / 6 15 33 / 7 16 43 / 8 17 53

| | | |
|---|---|---|
| DRW | PJM | 07/10/00 |
| CHK | | |
| APPD | | |

SCALE 4:1
SUPER DR
FINSH GOOD WT GRAMS/PIECE

TOLERANCE UNLESS OTHERWISE SPECIFIED
THREE PLACE DEC +/-.100
ANGULAR +/-1°
ONE PLACE DEC +/-.3
TWO PLACE DEC +/-.25

TITLE: RESISTOR ASSEMBLY

3RD ANGLE PROJECTION

Littelfuse® DES PLAINES, ILLINOIS 60016

OUTLINE

REVISION F

DRWG. NO. 02400111P

| LTR | DATE | REVISION | CHK | APD |
|---|---|---|---|---|
| A | 07/10/00 | 60320-RELEASED PJM | | |
| B | 04/24/02 | 82123D-CHG. TOLERANCES PJM | | |
| C | 01/08/04 | 83494D-CHR THERMOPLASTIC COLOR TO RED BJJ | | |
| D | 09/10/07 | 85439D-REDRAWN IN UG 4.3 WAS 4.6, 3.6 WAS 3.8, 1.8 WAS 0.7 GMB | | |
| E | 09/01/09 | 001215EC-REMOVED ALL CPK MARKINGS GMB | | |
| F | 11/30/11 | 503801ECA-CHANGE DIMENSIONS, SEE ECO OPL | | |