
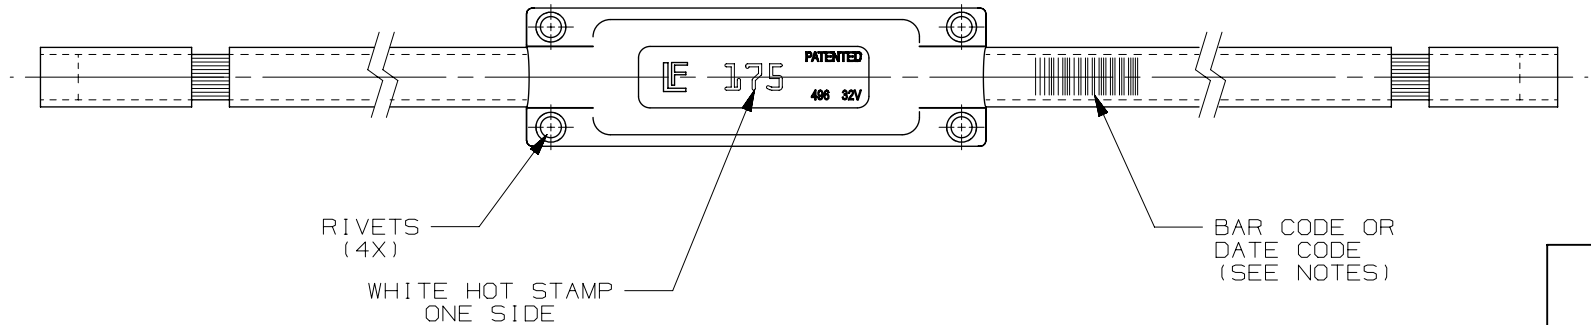
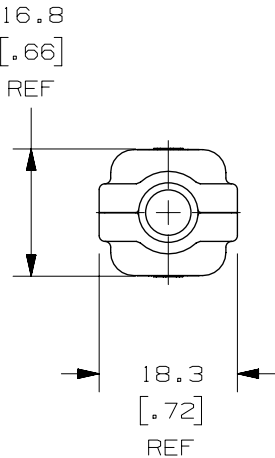


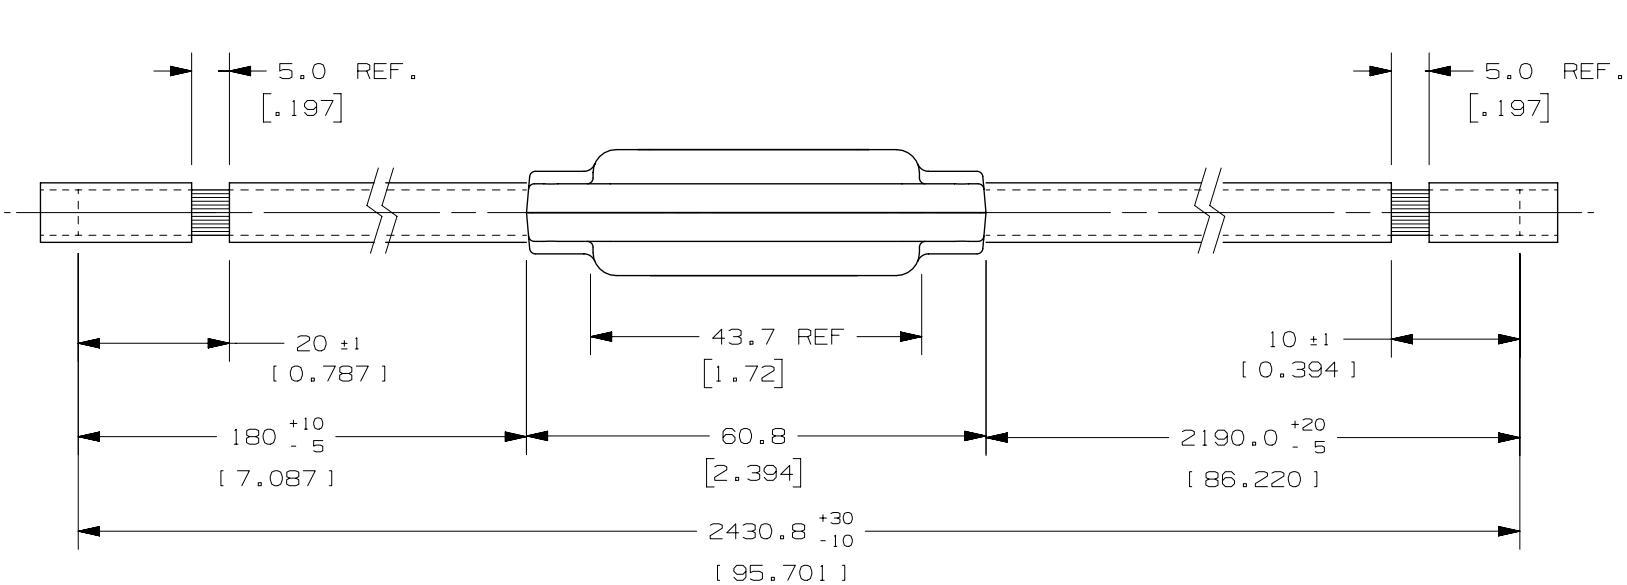


% OF RATING	OPENING TIME	
	MINIMUM	MAXIMUM
100	100 HRS	-
135	120 S	1800 S
200	10 S	300 S
350	1 S	15 S
600	0.3 S	5 S

NOTES:
INTERRUPT RATING: 2000A @ 32VDC
VOLTAGE RATING: 32VDC
TEMP. RATING: -40°C - 125°C
CABLE TYPE: XLPE INSULATED, SAE J1127, STX (4 GA) 125°C, RED.
SPECIFICATION: MEETS LITTELFUSE'S VS-006013 SPECIFICATION
APPLICATION: DESIGNED FOR UNDERHOOD INSTALLMENT.
BAR CODE OR
DATA CODE: THE BAR CODE OR DATE CODE IS USED FOR LOT TRACEABILITY.
IT IS LOCATED ON ONE OF THE CABLE LEADS.

NO		COMPONENT NO	DESCRIPTION	QTY/M	U/M
BILL OF MATERIAL					
UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN BRACKETS [] ARE INCHES					
UNLESS OTHERWISE SPECIFIED, DIMENSIONS DO NOT INCLUDE PLATING.					
⊙	DENOTES CRITICAL CHARACTERISTICS.				
CPK	DENOTES CPK DIMENSIONS, -MINIMUM CPK VALUE				
ST	DENOTES A CHARACTERISTIC THAT PROVIDES AN INDICATION OF PROCESS PERFORMANCE. PROCEDURE FOR MEASUREMENT AND TRACKING TO BE DEFINED IN LITTELFUSE INSPECTION INSTRUCTIONS				
CP	DENOTES CP DIMENSIONS, -MINIMUM CP VALUE MUST BE WITHIN THE DIMENSIONAL LIMITATIONS SHOWN ON DRAWING AND INITIALLY LOCATED TO ALLOW FOR MAXIMUM TOOL LIFE				

METRIC
ASSEMBLY

COPIES TO		MATL SPEC									
1	9 18	FINISH									
2	10 19										
3	12 20										
4	13 21										
5	14 23	DRW	FYUE	DATE	07/19/12	SCALE	FULL				
6	15 33	CHK		DATE		SUPER DR					
7	16 43	APPD		DATE		FINSH GOOD WT					
8	17 53	GRAMS/PIECE									
TOLERANCES UNLESS OTHERWISE SPECIFIED (REF. ISO 2768-mK)											
DIMENSION		UP TO 0.5 - 3		OVER 3 - 6		UP TO OVER 6 - 30		UP TO OVER 30 - 120		UP TO OVER 120 - 400	
TOLERANCE		±0.1		±0.1		±0.2		±0.3		±0.5	
3RD ANGLE PROJECTION		TITLE									
		CABLEPRO 32V 175A									
		REVISION		DRAWG. NO.		OUTLINE					
						0L-0496175.ZXY-CN					
LTR		DATE		REVISION				CHK		APD	
A		07/26/12		505633ERA-RELEASE FYUE							
B		05/21/14		510514ECA-CHANGE WIRE LENGTH FYUE							
C		01/26/15		511485ECA-CHANGE CABLE LENGTH "A" FROM 170mm TO 180mm OPL							
D		13/DEC/17		518620ECA-TRACEABILITY MOVED FROM BODY TO CABLE LEAD. (OPL)							