
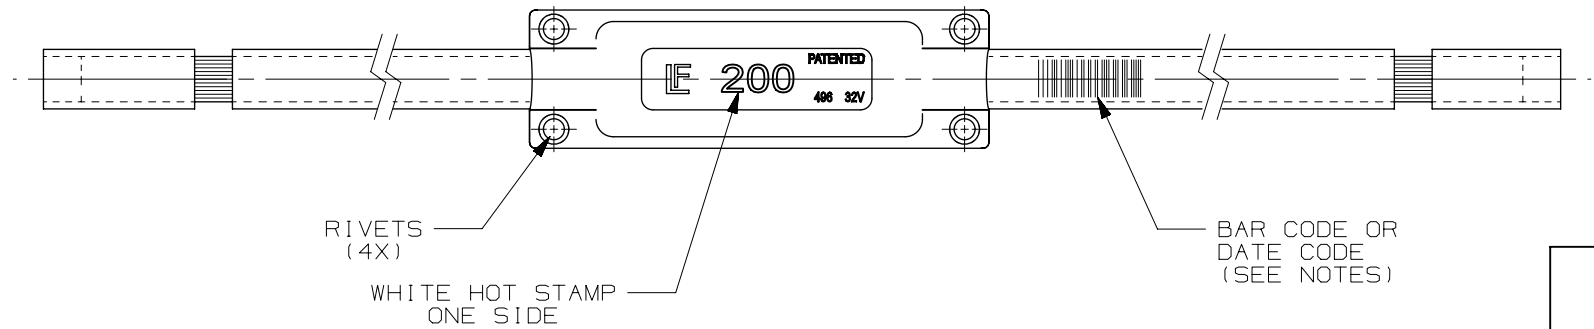


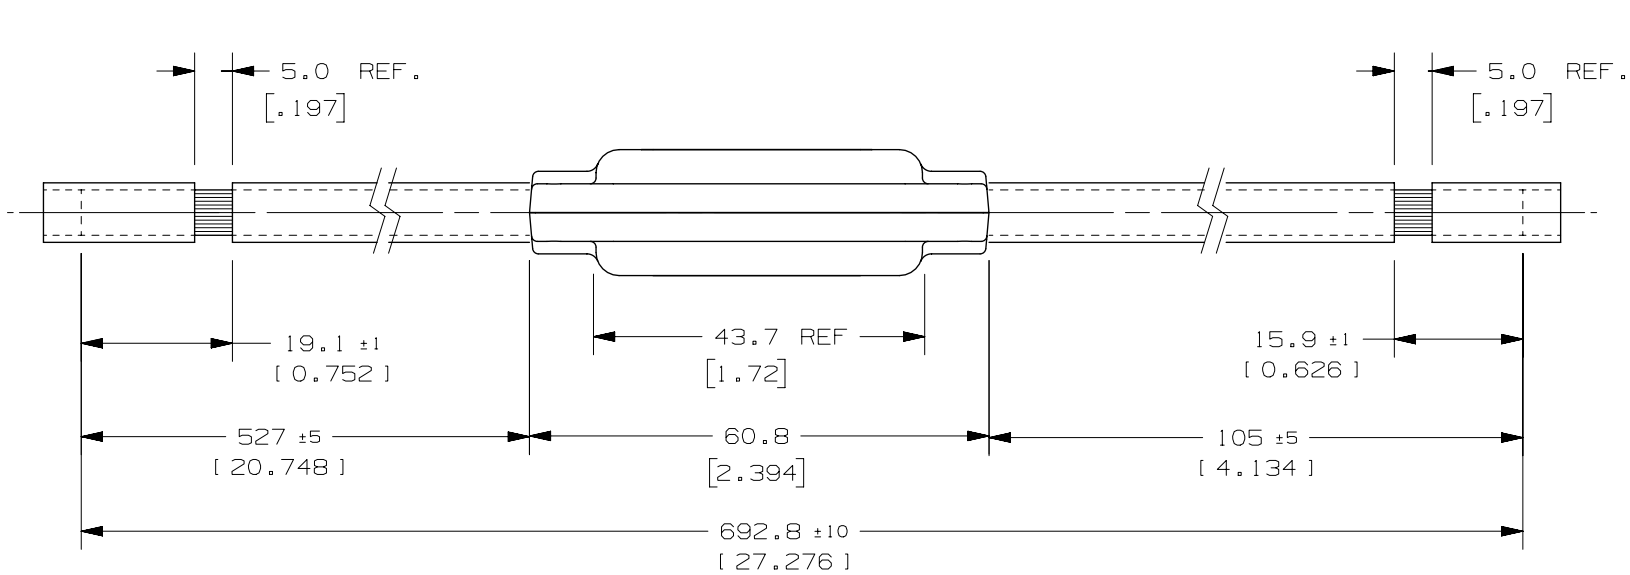

METRIC
ASSEMBLY

NOTES:
INTERRUPT RATING: 2000A @ 32VDC
VOLTAGE RATING: 32VDC
TEMP. RATING: -40°C - 125°C
CABLE TYPE: XLPE INSULATED, STX, 125°C, RED (4 GA).
SPECIFICATION: MEETS LITTELFUSE'S VS-006013 SPECIFICATION
APPLICATION: DESIGNED FOR UNDERHOOD INSTALLMENT.
BAR CODE OR
DATA CODE: THE BAR CODE OR DATE CODE IS USED FOR LOT TRACEABILITY.
IT IS LOCATED ON ONE OF THE CABLE LEADS.

% OF RATING	OPENING TIME	
	MINIMUM	MAXIMUM
100	100 HRS	-
135	120 S	1800 S
200	10 S	300 S
350	1 S	15 S
600	0.3 S	5 S

NO		COMPONENT NO	DESCRIPTION	QTY/M	U/M
BILL OF MATERIAL					
UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN BRACKETS [] ARE INCHES					
UNLESS OTHERWISE SPECIFIED, DIMENSIONS DO NOT INCLUDE PLATING.					
⊙ DENOTES CRITICAL CHARACTERISTICS.					
CPK DENOTES CPK DIMENSIONS, -MINIMUM CPK VALUE					
ST DENOTES A CHARACTERISTIC THAT PROVIDES AN INDICATION OF PROCESS PERFORMANCE. PROCEDURE FOR MEASUREMENT AND TRACKING TO BE DEFINED IN LITTELFUSE INSPECTION INSTRUCTIONS					
CP DENOTES CP DIMENSIONS, -MINIMUM CP VALUE MUST BE WITHIN THE DIMENSIONAL LIMITATIONS SHOWN ON DRAWING AND INITIALLY LOCATED TO ALLOW FOR MAXIMUM TOOL LIFE					

COPIES TO		MATERIAL SPEC	
1	9	18	FINISH
2	10	19	
3	12	20	
4	13	21	SCALE FULL
5	14	23	SUPER DR
6	15	33	
7	16	43	DATE 21/DEC/17
8	17	53	DATE
TOLERANCES UNLESS OTHERWISE SPECIFIED (REF. ISO 2768-mK)		GRAMS/PIECE	
DIMENSION		0.5 - 3	UP TO OVER UP TO OVER UP TO OVER
TOLERANCE		+0.1	+0.1 ±0.2 ±0.3 ±0.5
3RD ANGLE PROJECTION		TITLE	
LTR		DATE	
A		21/DEC/17	
REVISION		CHK	
518622GCA-RELEASE		OPL	
APD		ER	
CABLEPRO		OUTLINE	
REVISION		DRWG. NO.	
A		0L-0496200.ZXAY-CN	
Littelfuse		DES PLAINES, ILLINOIS 60016	