
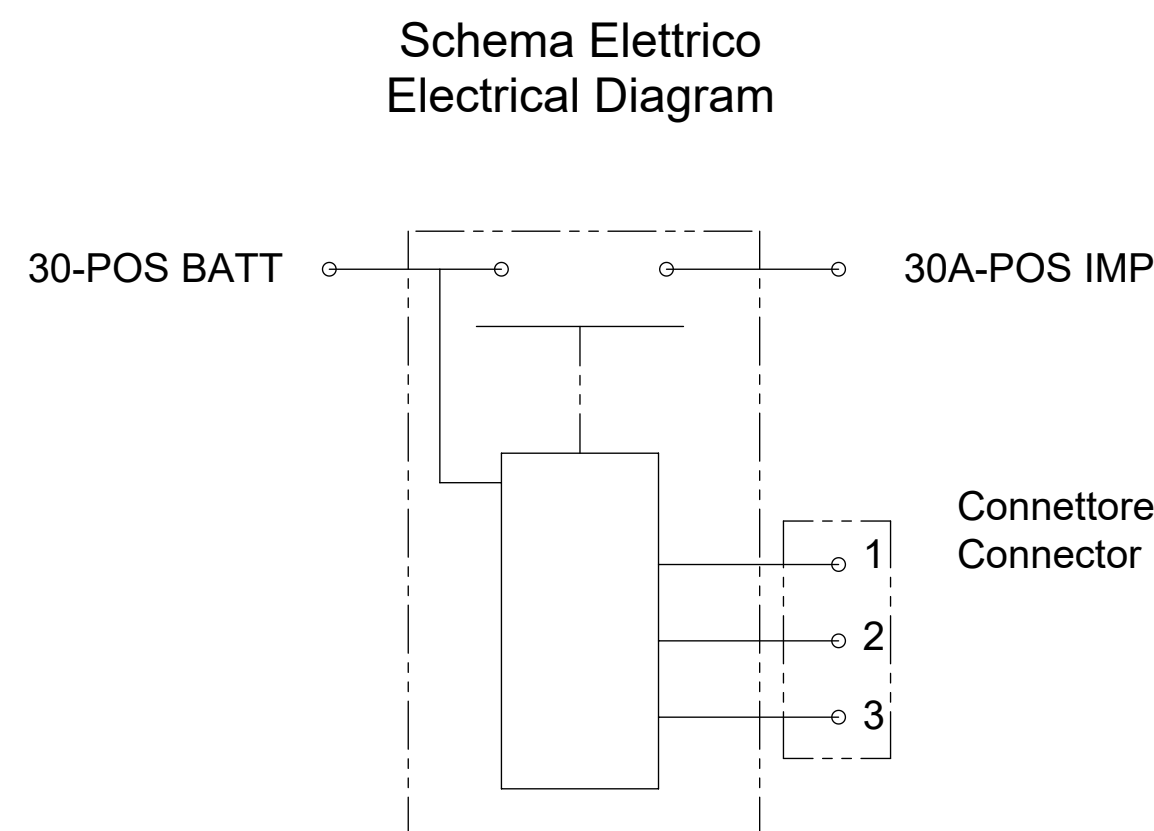


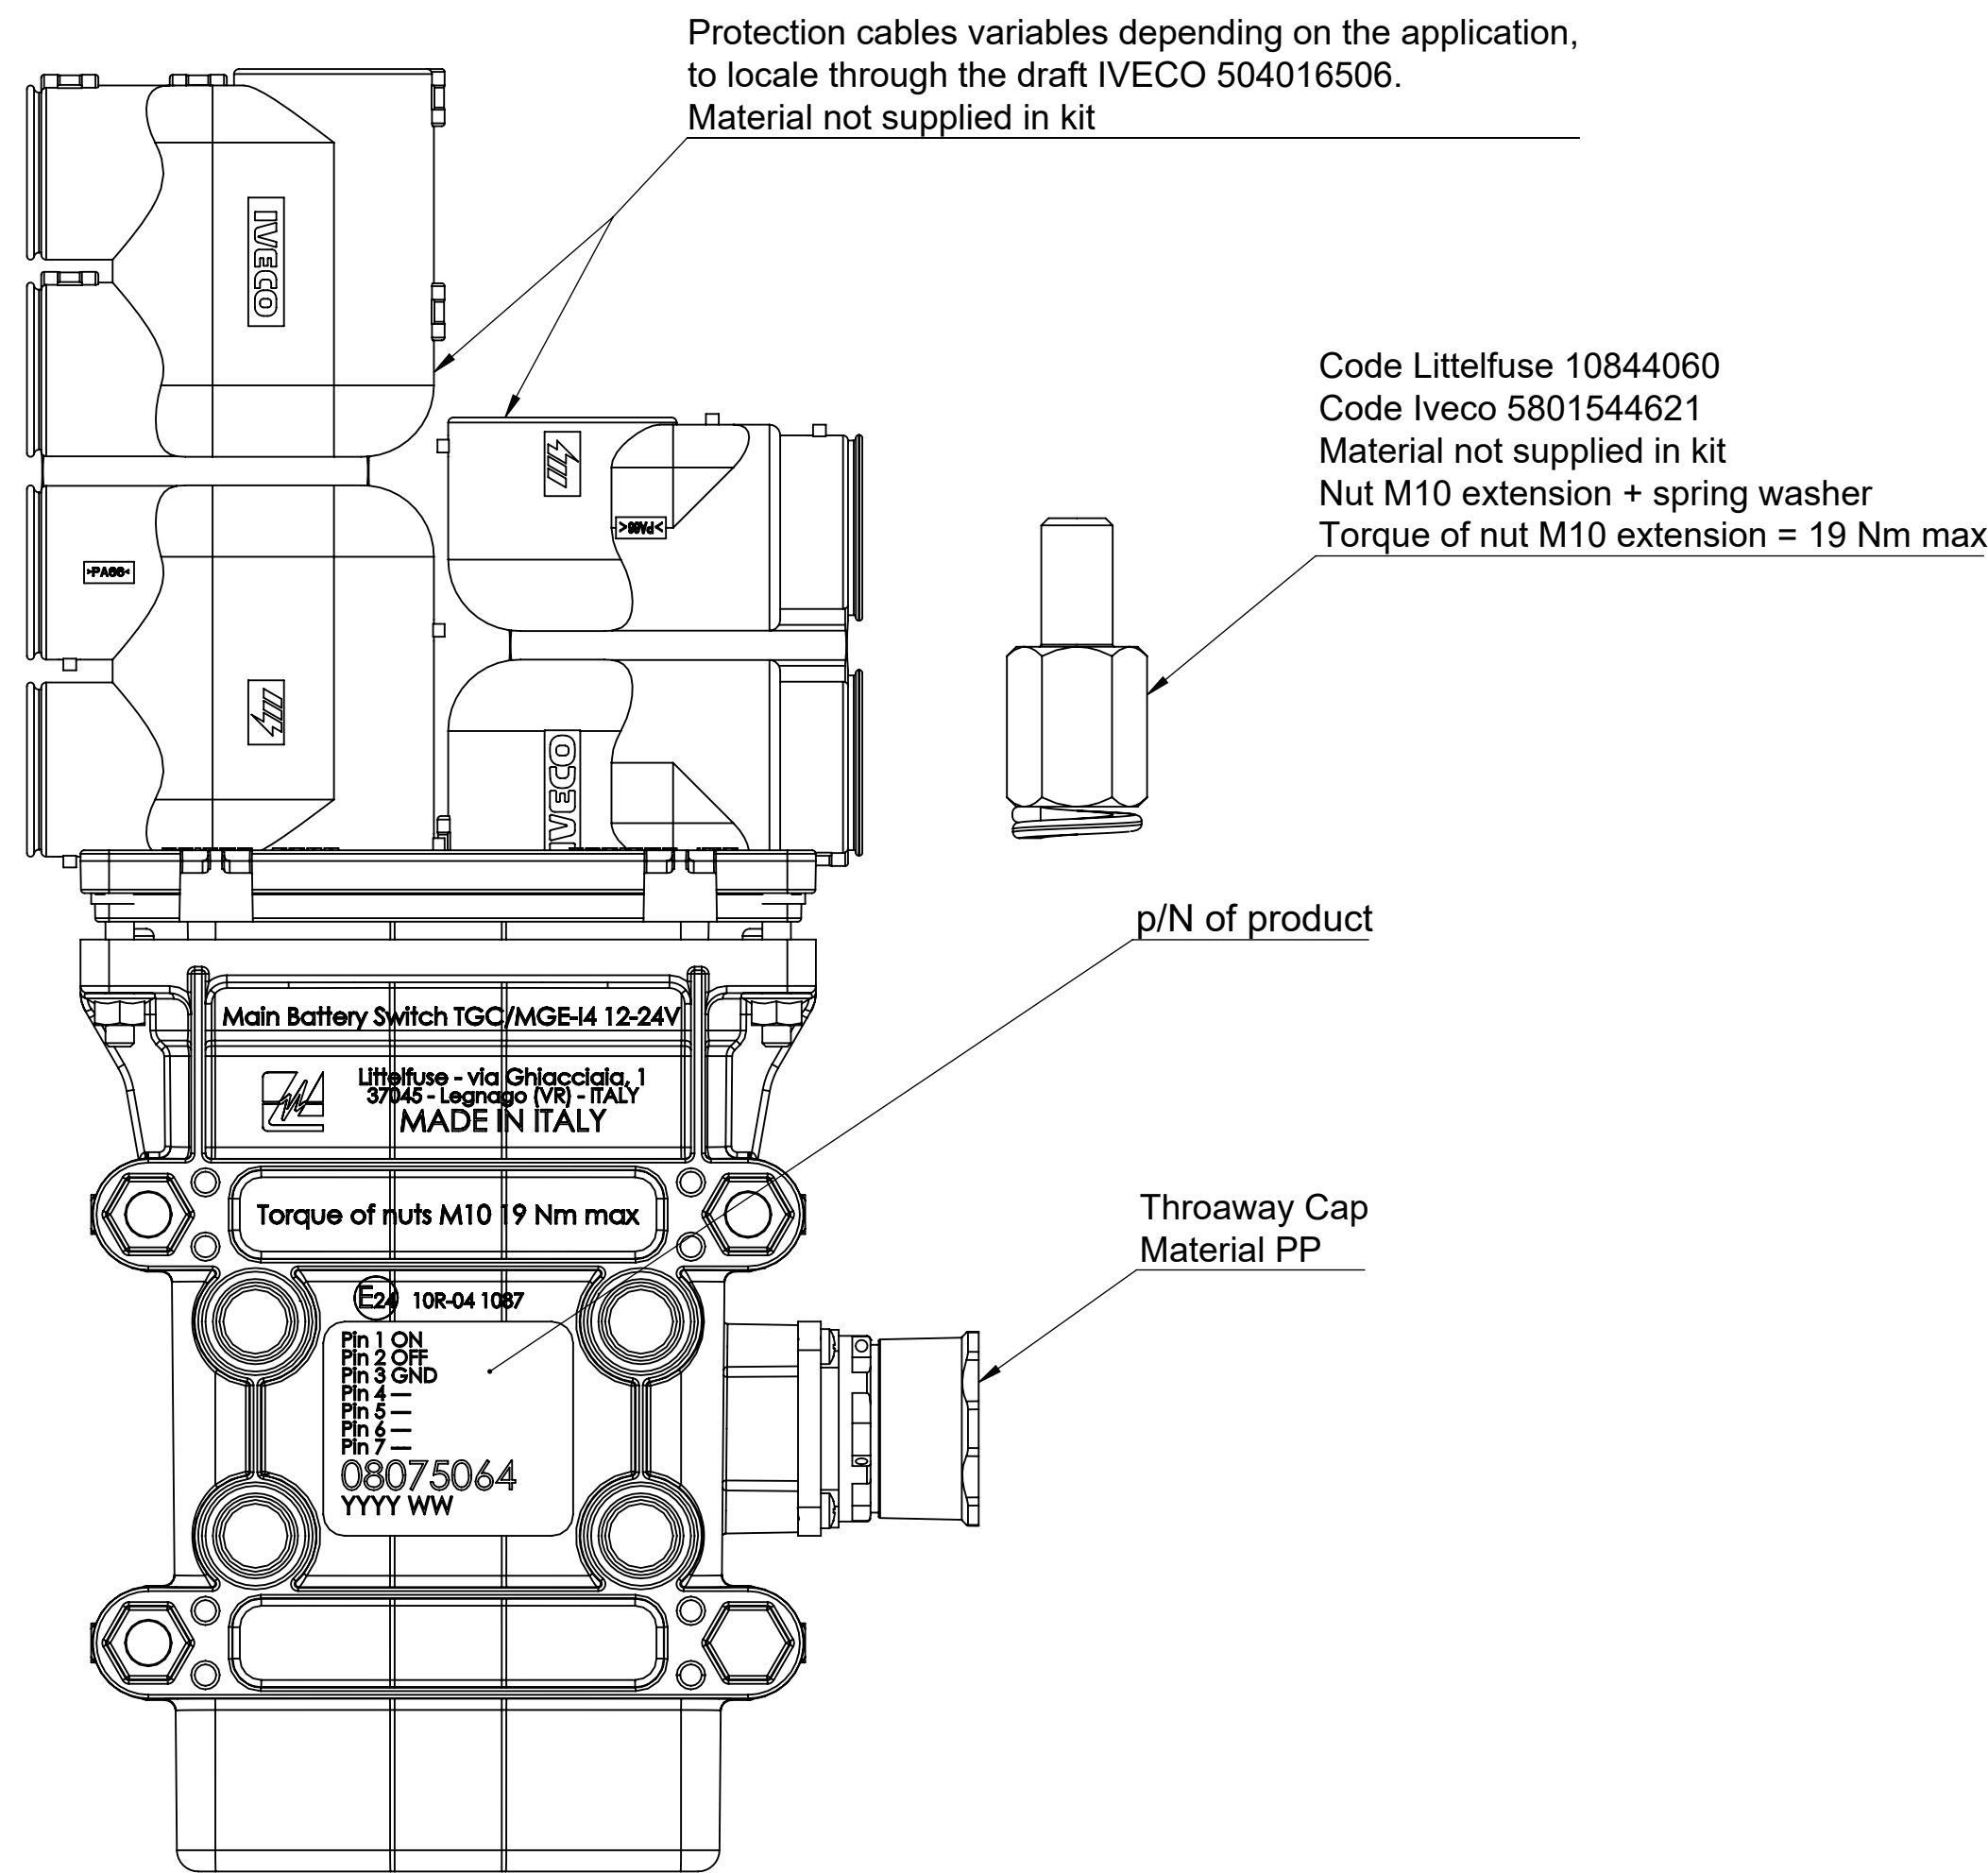

Connettore PIN / Connector	Negativo GND	Contatto principale Main contact
1	GND	ON
2	floating	
3	GND	

CHARACTERISTICS

- Nominal working voltage: 12 / 24 V
- Nominal working voltage range (min/max): 10 -16 V / 18 - 32 V
- Nominal working current: 5.2 / 10.4 A
- Nominal working current range (min/max): 4.3 - 7 A / 7.8 - 13.9 A
- Nominal working current main contact: 2000 A for 5 sec.

POS.	DESCRIPTION	MATERIAL	Q.TY	U/M
1	Box	PBT	1	EA
2	Top cover complete	-	1	EA
3	Body connector	PBT	1	EA
4	Self-tapping screw 3x12	Stainless steel	1	EA
5	Kit	-	4	EA
6	Screw M4x20	Stainless steel	4	EA

DIMENSIONS AND TOLERANCES IN MILLIMETERS, DEFINED ACCORDING TO ISO 1101-2017						
linear dimensions						
0.5 3	>3 #3	>6 30	>30 120	>120 400	>400 1000	>1000 2000
±0.2	±0.3	±0.5	±0.8	±1.2	±2	±3
angle (for range of lengths)						
	up to 10	>10 50	>50 120	>120 400		
±1°/30"		±1°	±0°/30"		±0°/15"	
● FIT FUNCTION CRITICAL CHARACTERISTICS SYMBOL						
<S> SAFETY: COMPLIANCE CRITICAL CHARACTERISTICS SYMBOL						
CPK DENOTES CPV DIMENSIONS MINIMUM CPV VALUE						
(ST)	DENOTES A CHARACTERISTIC THAT PROVIDES AN INDICATION OF PROCESS PERFORMANCE PROCEDURE FOR MEASUREMENT TRACKING TO BE DEFINED IN LITTELFUSE INSPECTION INSTRUCTIONS					
CP	DENOTES CP DIMENSIONS - MINIMUM CP VALUE MUST BE WITHIN THE DIMENSIONAL LIMITATIONS SHOWN ON DRAWING AND INITIALLY LOCATED TO ALLOW FOR MAXIMUM TOOL LIFE.					
NAME _____		DATE _____				
DRAWN / Dwg Idem.		02-May-22		Expertise Applied Assessments Delivered		
CHECKED _____		_____		TITLE _____		
_____		_____		TGC/MGE-I-12-24V OUTLET DIN 3-		
FORM NO.: CDP-MG-BS-03 REV.A		WAY _____		SCALE: _____		
FIRST NAME PROJECTION		SIZE 1:1		DWG NO. _____		CUSTOMER REV. _____
 		A		DL-08075064		A
DO NOT SCALE DRAWING		Sheet 1 of 1		SHEET 1 OF 1		