THIS DRAWING AND THE INFORMATION CONTAINED WITHIN IT ARE CONFIDENTIAL AND MAY NOT BE COPIED OR DISCLOSED WITHOUT THE WRITTEN PERMISSION OF LITTELFUSE.

| REVISIONS | | | | |
|---|---|---|---|---|
| REV. | DESCRIPTION | DATE | DESIGNED | APPROVED |
| A | First issue of outline drawing | 20-May-20 | L.Dal Molin | M.Tinto |

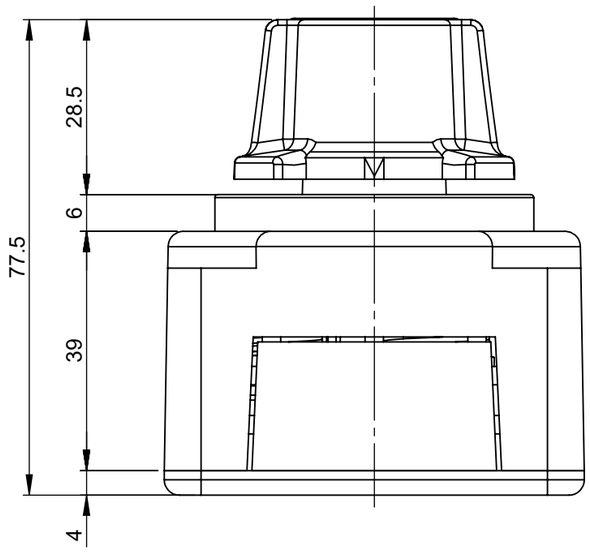


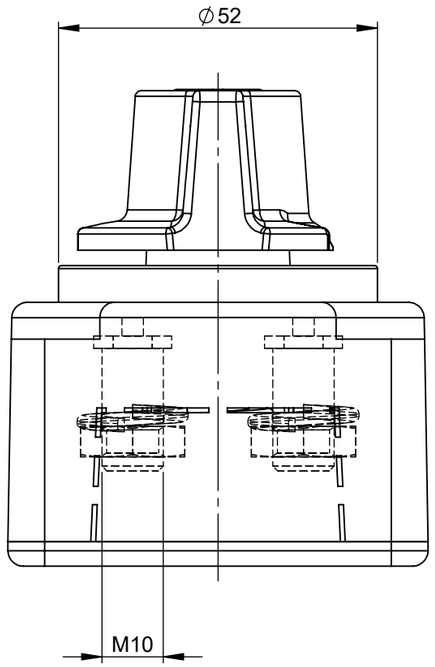


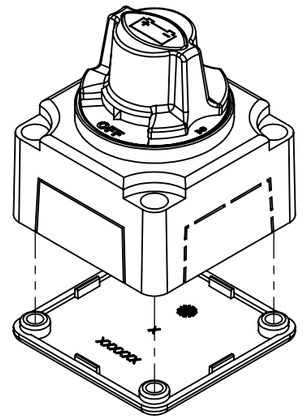


SCALE 1:2

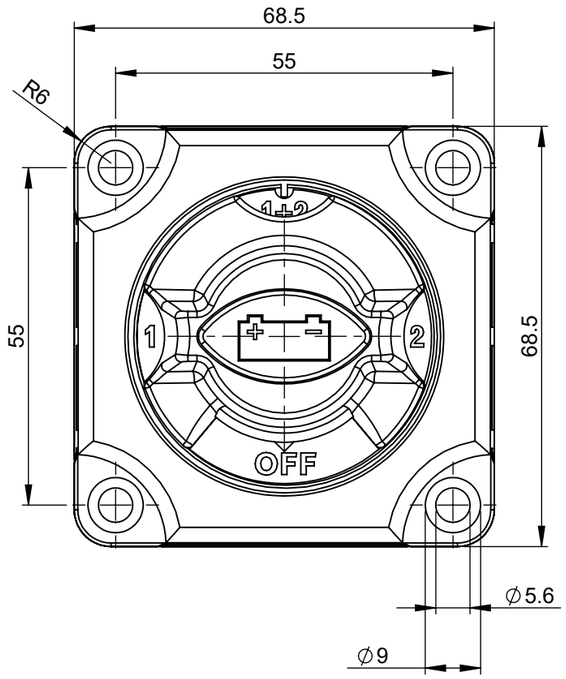


TECHNICAL DATA

-Nominal tension: 24V
-Maximum continuos operating current: 300A
-Highest load 1000A for 5 sec
-Copper contacts M10
-Brass nuts M10

SAP drawing number:

Material and treatments:

DIMENSIONS AND TOLERANCES IN MILLIMETERS, DEFINED ACCORDING TO ISO 1101-2017.

linear dimensions

| 0,5<br>3 | >3<br>6 | >6<br>30 | >30<br>120 | >120<br>400 | >400<br>1000 | >1000<br>2000 |
|---|---|---|---|---|---|---|
| ±0,2 | ±0,3 | ±0,5 | ±0,8 | ±1,2 | ±2 | ±3 |

angle (for range of lengths)

| up to<br>10 | >10<br>50 | >50<br>120 | >120<br>400 |
|---|---|---|---|
| ±1°30' | ±1° | ±0°30' | ±0°15' |

| | |
|---|---|
| ● | FIT/ FUNCTION CRITICAL CHARACTERISTICS SYMBOL |
| <S> | SAFETY/ COMPLIANCE CRITICAL CHARACTERISTICS SYMBOL |
| CPK | DENOTES CPK DIMENSIONS MINIMUM CPK VALUE |
| ST | DENOTES A CHARACTERISTIC THAT PROVIDES AN INDICATION OF PROCESS PERFORMANCE.PROCEDURE FOR MEASUREMENTAND TRACKINGTO BE DEFINED IN LITTELFUSE INSPECTION INSTRUCTIONS |
| CP | DENOTES CP DIMENSIONS, -MINIMUM CP VALUE MUST BE WITHIN THE DIMENSIONAL LIMITATIONS SHOWN ON DRAWING AND INITIALLY LOCATED TO ALLOW FOR MAXIMUM TOOL LIFE |

| | NAME | DATE |
|---|---|---|
| DRAWN | L. Dal Molin | 02-Apr-19 |
| CHECKED | - | - |
| | - | - |
| | - | - |

FORM NO; CVP-PE40-0013 REV A

FIRST ANGLE PROJECTION

Littelfuse

Expertise Applied | Answers Delivered

TITLE
MARINE MANUAL BDS 24V (OFF-1-BOTH-2)

| SIZE: | DWG. NO. | OUTLINE | REV. |
|---|---|---|---|
| A3 | OL-08080900 | | A |

DO NOT SCALE DRAWING | SCALE 1:1 | SHEET 1 OF 1