

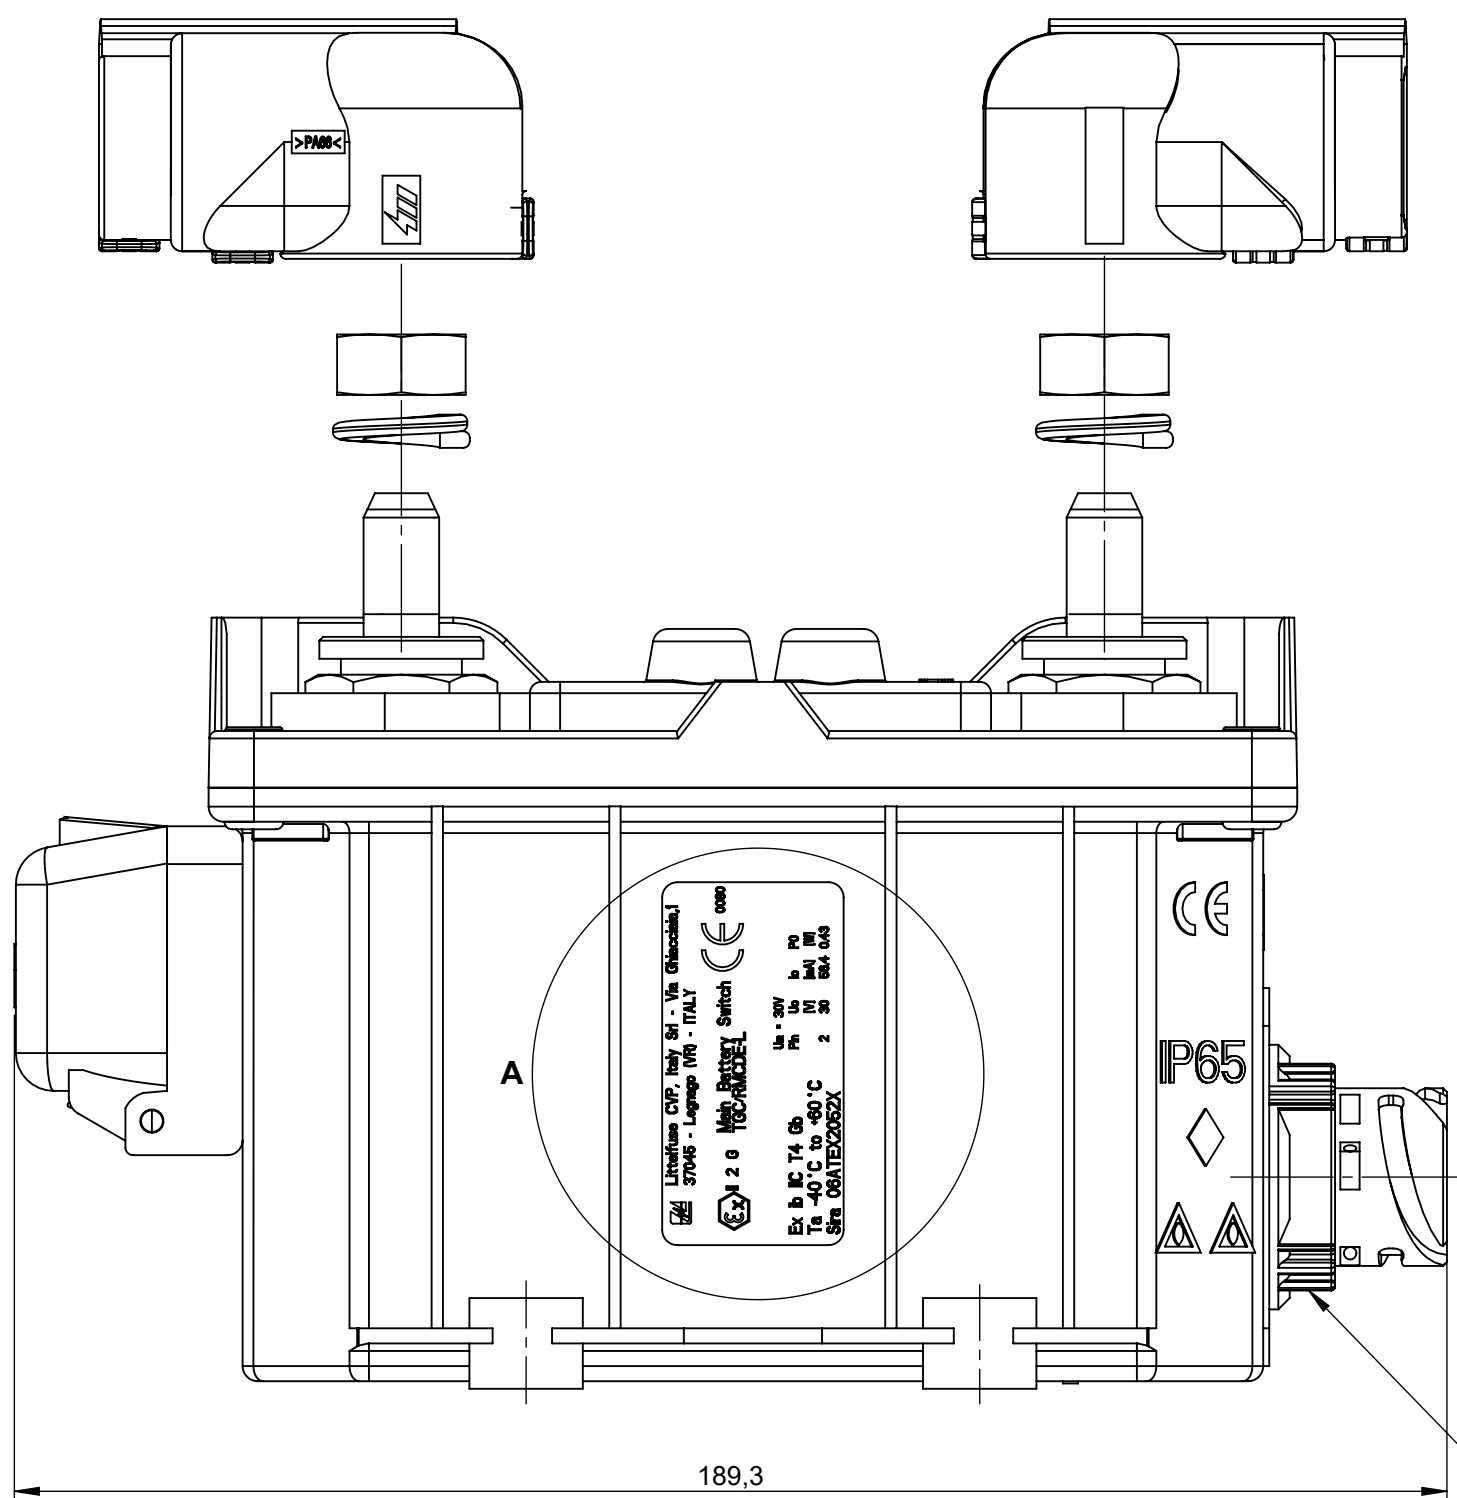


Spare part cod 00226200  
Protection open 70mmq

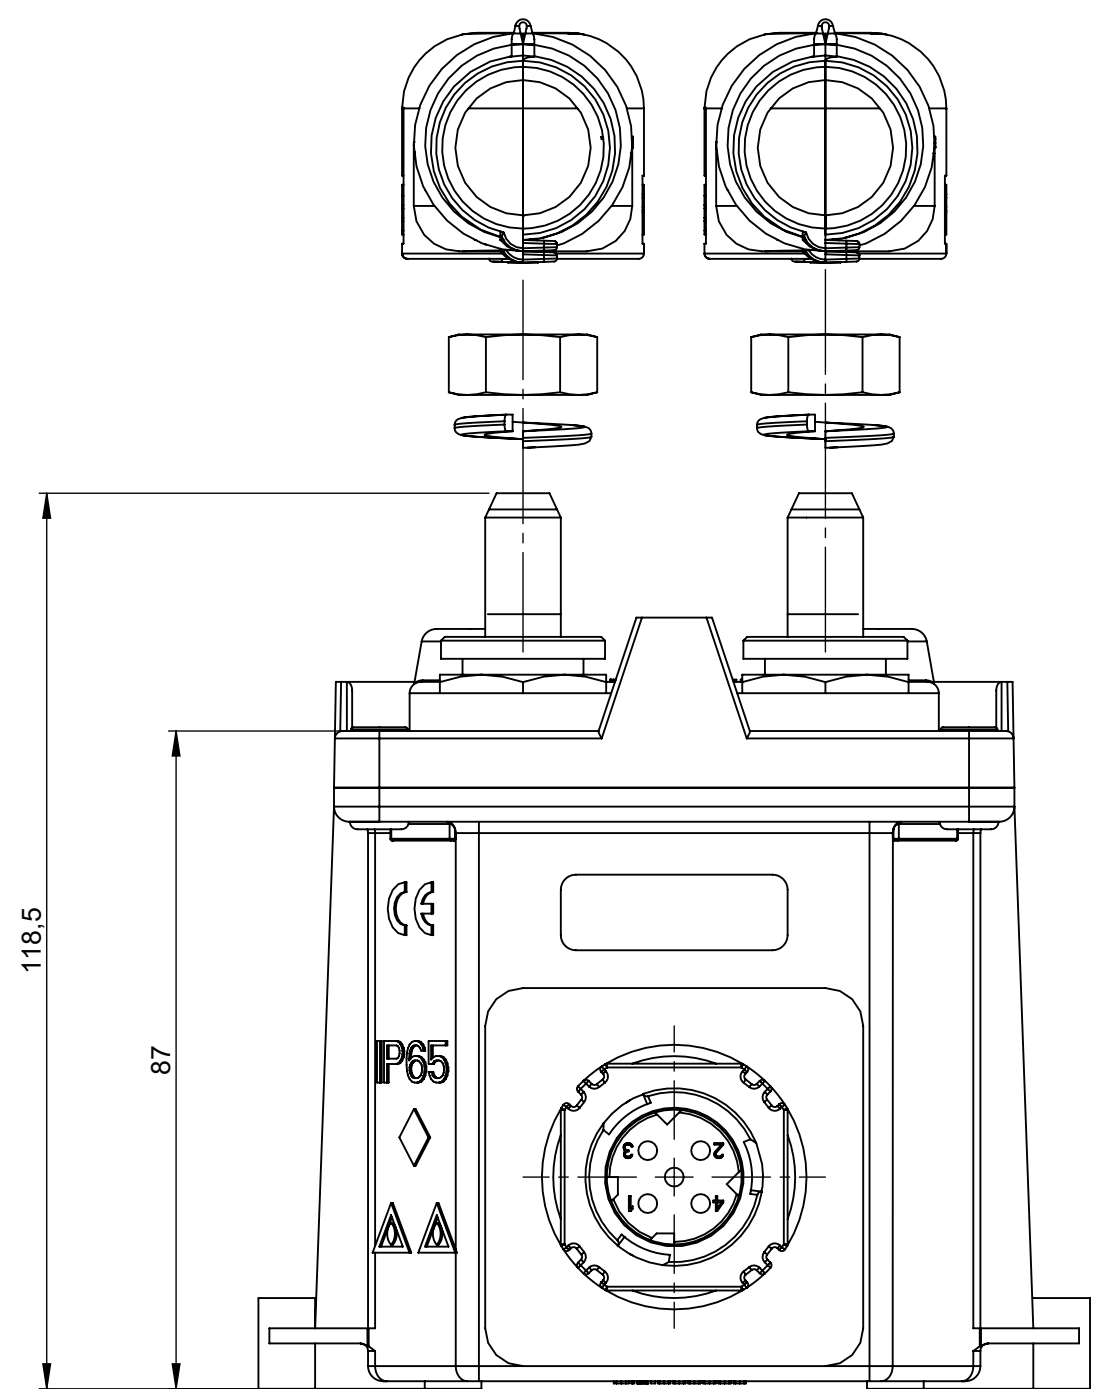

Screw the connector nut  
with a pair of  $7 \pm 1$  Nm


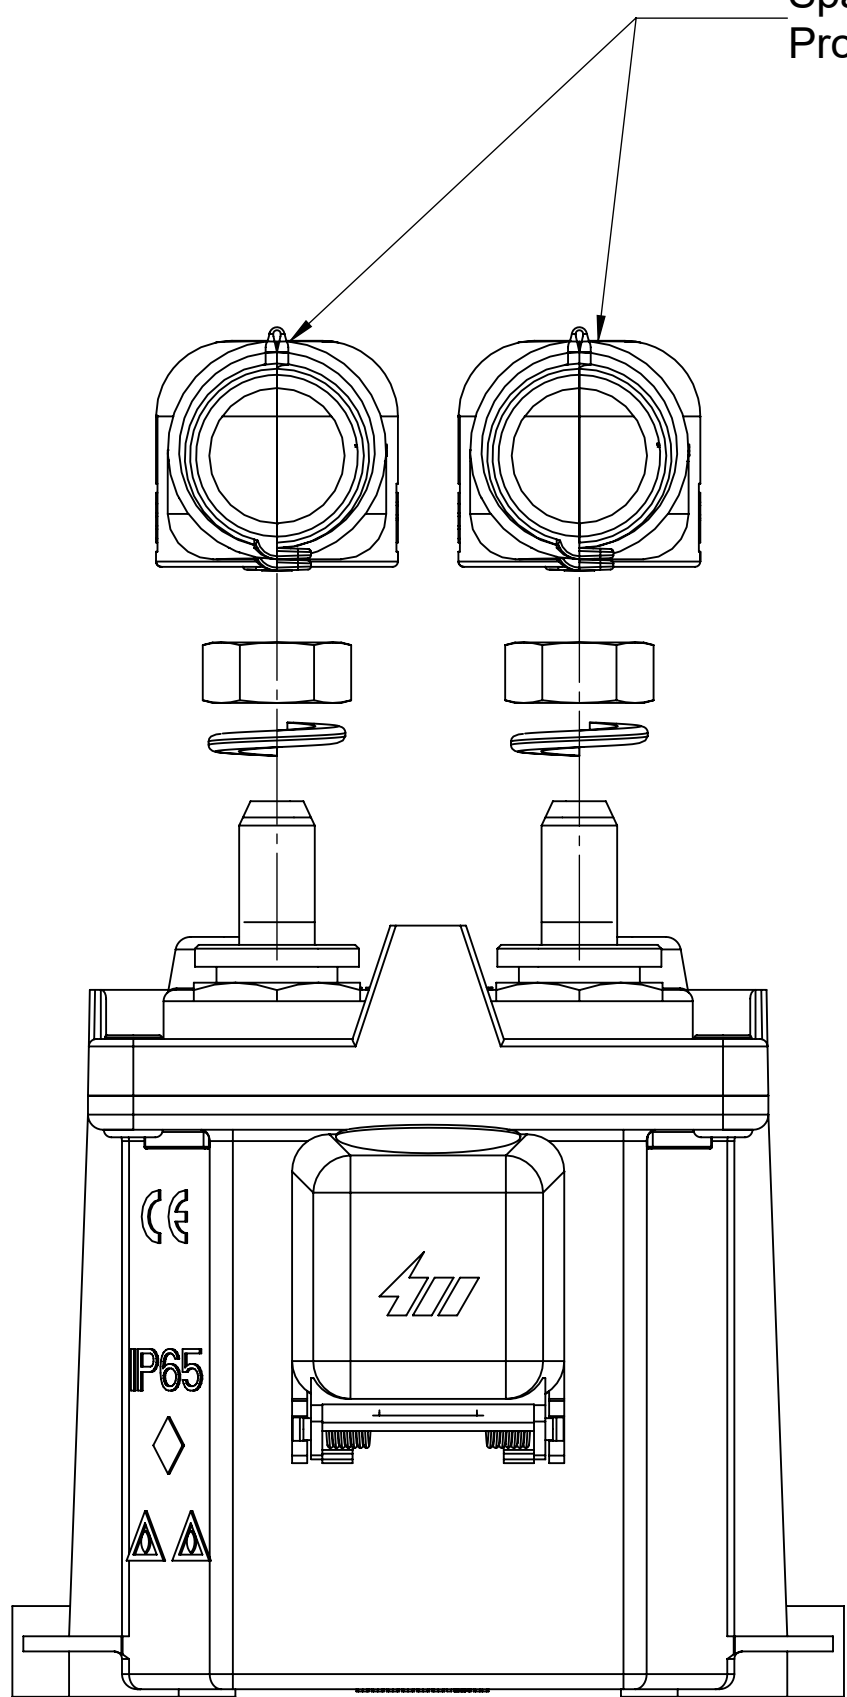


- Nominal operating voltage: 12 ÷ 24 V
- Max continuous current on contacts: 250 A at 23°C
- Max current short duration on contacts: 2000 A at 23°C for 30 sec.

- Number of electrical and mechanical operations: 50.000
- Locking torque nuts M10/M12: 20 Nm

- We suggest to fix the TGC to the structure by screws M8 UNI 5931:1984 and plane washers 8.4 x 17 UNI 6592:1969 under head
- (\*): Data of production
- The distance between plunger bridge and fix contacts must be minimum 2 mm

**Material and treatments:**

DIMENSIONS AND TOLERANCES IN MILLIMETERS, DEFINED ACCORDING TO ISO 1101:2017						
linear dimensions						
0,5 3	>3	>6	>30	>120	>400	>1000
±0,2	±0,3	±0,5	±0,8	±1,2	±2	±3
angle (of face lengths)						
up to 10°	>10° 50	>50 120	>120 400	>400 1000	>1000 400	
±1'		±1'		±0°30'	±0°15'	
● <b>IT</b> /FUNCTION CRITICAL CHARACTERISTICS SYMBOL						
< <b>S</b> > SAFETY COMPLIANCE CRITICAL CHARACTERISTICS SYMBOL						
<b>CPK</b> DENOTES CPK DIMENSIONS MINIMUM CPK VALUE						
<b>(ST)</b> DENOTES A CHARACTERISTIC THAT PROVIDES AN INDICATION OF PROCESS PERFORMANCE POTENTIAL FOR MEASUREMENT VARIATION. TRACKING SHOULD BE DEFINED IN LITTELFUSE INSPECTION INSTRUCTIONS						
<b>CP</b> DENOTES CP DIMENSIONS - MINIMUM CP VALUE MUST BE WITHIN THE DIMENSIONAL LIMITATIONS SHOWN ON DRAWING AND INITIALLY LOCATED TO 40 FOR MAXIMUM TOOL LIFE						
NAME		DATE		 <b>Littelfuse®</b> Expertise Applied   Answers Delivered		
DRAWN: L. Del Mar		27/05/2019				
CHECKED:						
FORM NO. CDP-REF4603.0 REV. A FIRST ANGLE PROJECTION				<b>TITLE</b> GENERAL ELECTRICAL MAIN SWITCH <b>IGC/RMC/DE 24V</b> A1      DWG. NO.      CULITURE REF.      A		
 <b>DO NOT SCALE DRAWING</b>				<b>SHEET 1 OF 1</b> <b>08-00977460</b>		



Expertise Applied | Answers Delivered