


PART NUMBER	"A"	"B"	"C"	"D"	LEAD "A" COLOR	LEAD "B" COLOR
OFHA0002ZXJ	101.6 +/- 5 (4.0)	101.6 +/- 5 (4.0)	6.35 +/- 2 (0.25)	6.35 +/- 2 (0.25)	ORANGE	ORANGE
OFHA0002ZXJA	228.6 +/- 5 (9.0)	228.6 +/- 5 (9.0)	6.35 +/- 2 (0.25)	6.35 +/- 2 (0.25)	ORANGE	ORANGE
OFHA0002ZXJB	101.6 +/- 5 (4.0)	101.6 +/- 5 (4.0)	NO STRIP	NO STRIP	ORANGE	ORANGE

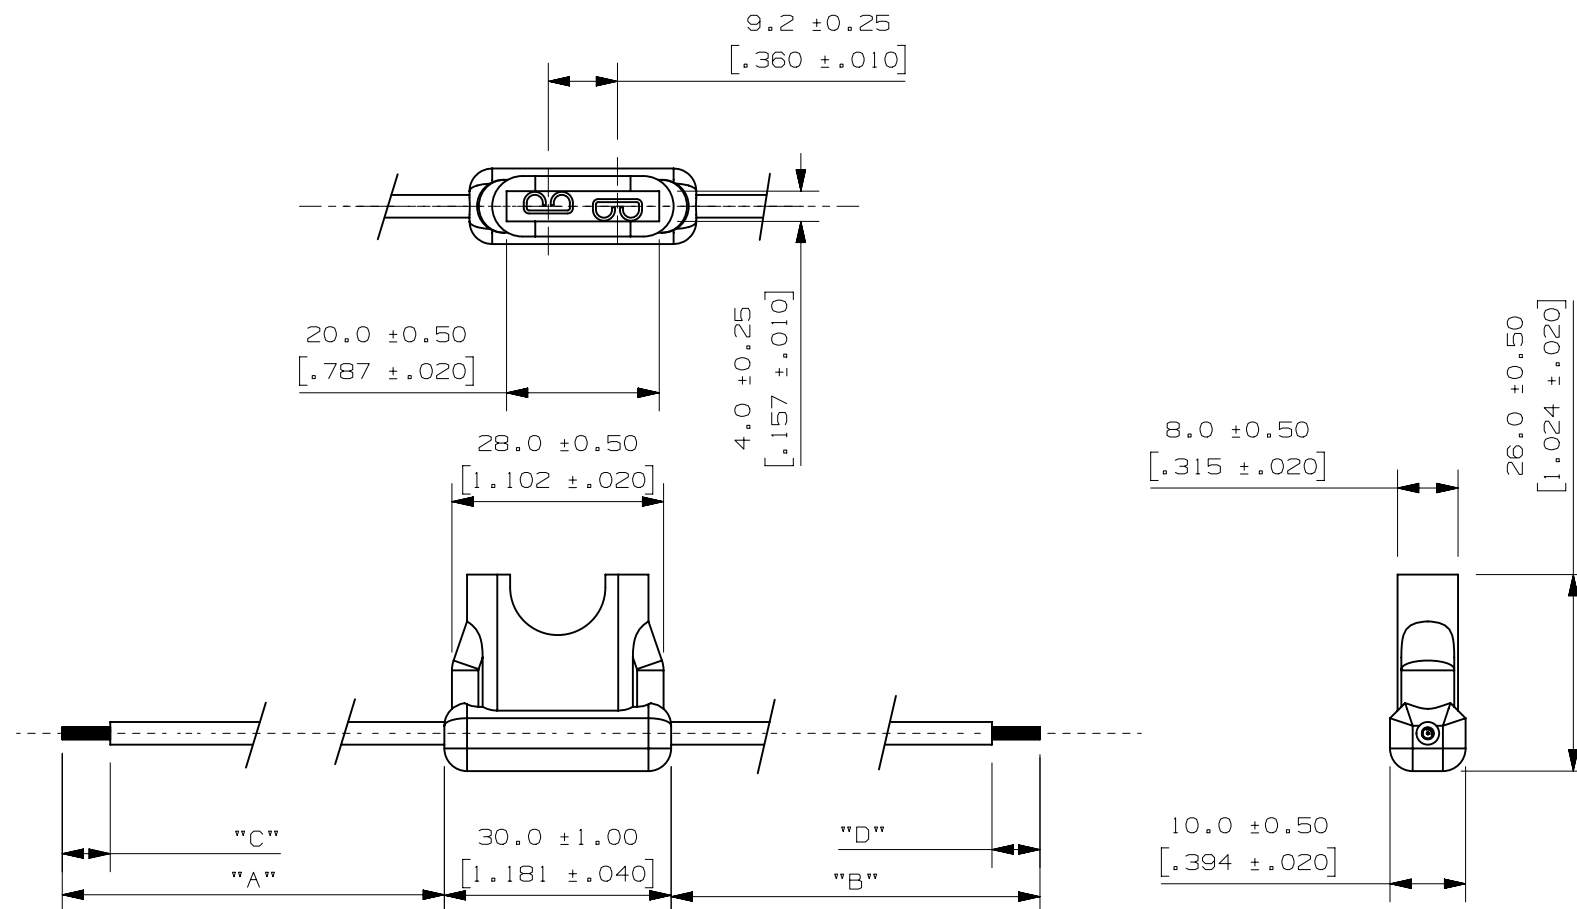

NOTES:

1. HOLDER MATERIAL : BLACK TPV.
2. CONTACTS : COPPER ALLOY, TIN PLATED.
3. WIRE: 12 AWG STRANDED COPPER, 125°C RATED, GXL INSULATION.
4. CRIMP MUST MEET SAE/USCAR21 STANDARD.
5. RATING : MAX. 30A, 32VDC.
6. MAX. TEMP. : 105 °C.
7. FUSEHOLDERS MUST NOT BE PLACED UNDER TENSION IN FINAL APPLICATION.

METRIC

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN BRACKETS [] ARE INCHES	
UNLESS OTHERWISE SPECIFIED, DIMENSIONS DO NOT INCLUDE PLATING.	
⊙	DENOTES CRITICAL CHARACTERISTICS. DENOTES CPK DIMENSIONS, -MINIMUM CPK VALUE DENOTES A CHARACTERISTIC THAT PROVIDES AN INDICATION OF PROCESS PERFORMANCE. PROCEDURE FOR MEASUREMENT AND TRACKING TO BE DEFINED IN LITTELFUSE INSPECTION INSTRUCTIONS DENOTES CP DIMENSIONS, -MINIMUM CP VALUE MUST BE WITHIN THE DIMENSIONAL LIMITATIONS SHOWN ON DRAWING AND INITIALLY LOCATED TO ALLOW FOR MAXIMUM TOOL LIFE
CPK	
ST	
CP	

[illegible]