



PART NUMBER	"A"	"B"	"C"	"D"	LEAD "A" COLOR	LEAD "B" COLOR	WITH FUSE
OFHM0001ZXJA	150±5 [5.91±0.2]	150±5 [5.91±0.2]	NO END STRIP	NO END STRIP	RED	RED	3A
OFHM0001ZXJB	150±5 [5.91±0.2]	150±5 [5.91±0.2]	NO END STRIP	NO END STRIP	BLUE	BLUE	3A

LTR	DATE	REVISION	CHK	APD
A	5/Aug/16	516235ECC-NEW RELEASE FYUE		

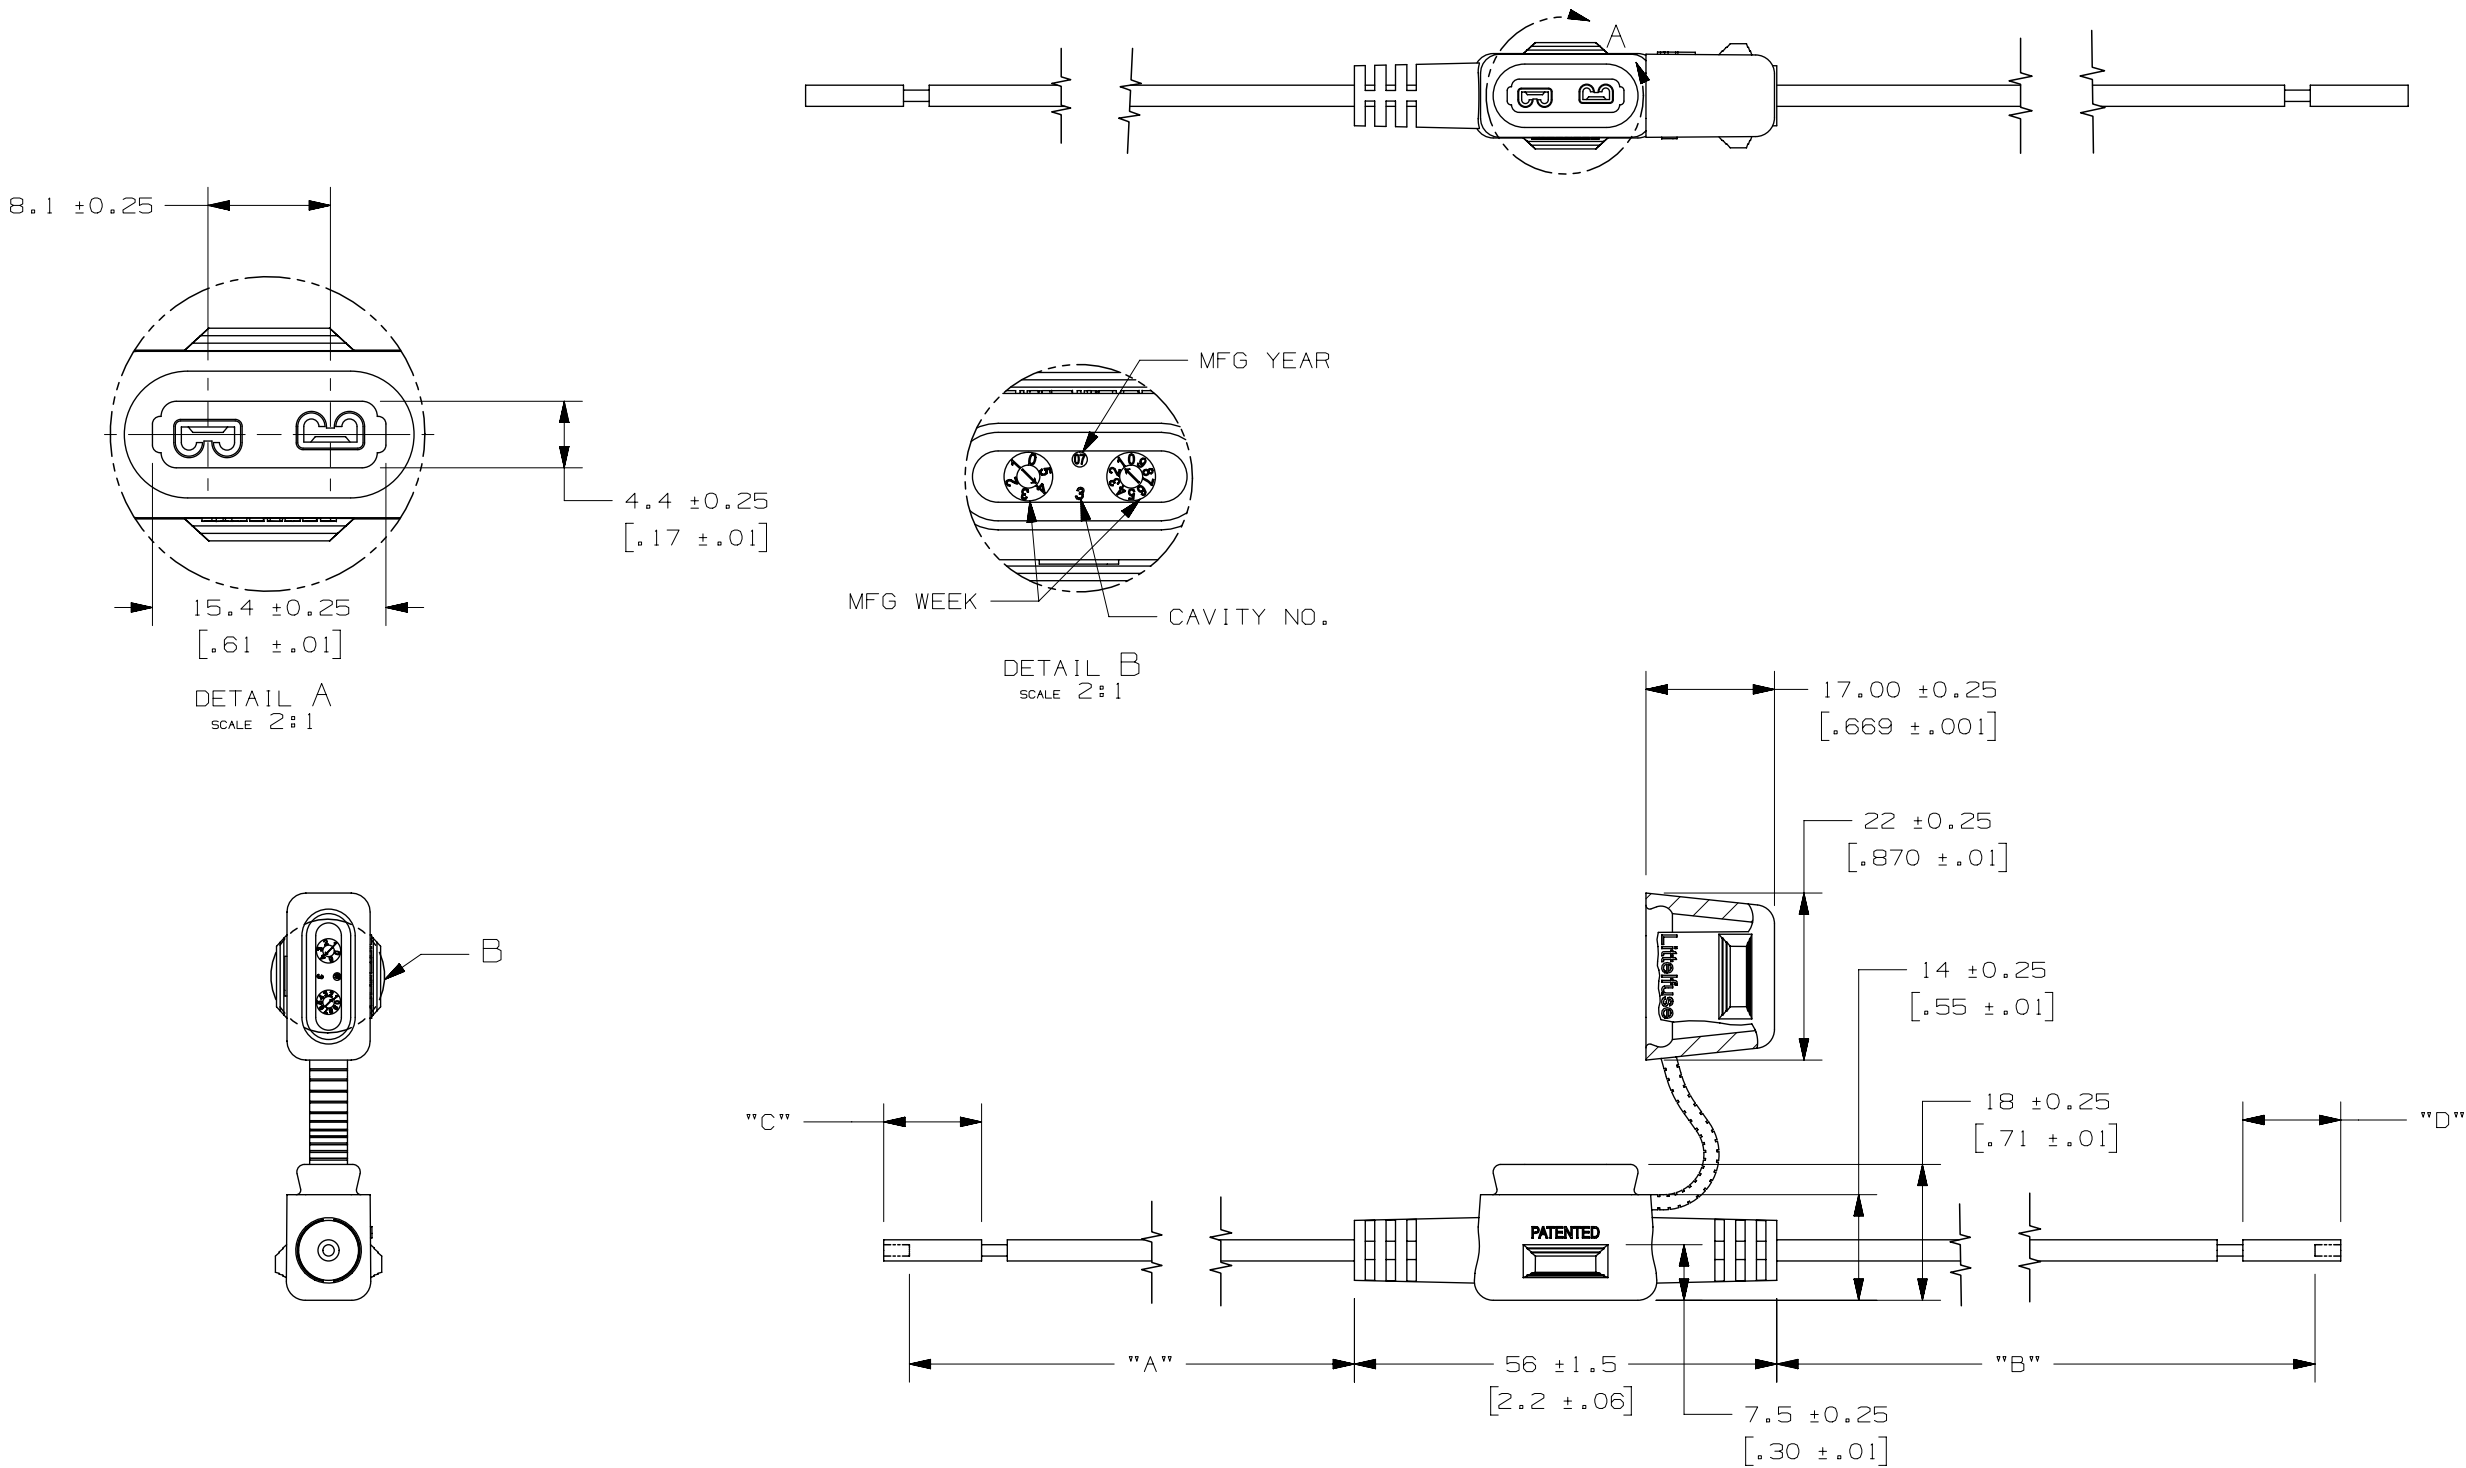

IN-LINE FUSEHOLDER SHOWN
WITH MINI FUSE INSTALLED
(NOT INCLUDED)

- NOTES:
1. HOLDER MATERIAL: BLACK TPV
 2. CONTACTS: COPPER ALLOY: TIN-PLATED
 3. WIRE: 20 AWG UL1015 WIRE
 4. CRIMP: MUST MEET SAE/USCAR 21 STANDARD
 5. RATING: 3A, 32Vdc
 6. FUSEHOLDERS SHOULD NOT BE PLACED UNDER TENSION IN FINAL APPLICATION
 7. MAX TEMPERATURE 105°C

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN BRACKETS [] ARE INCHES								
UNLESS OTHERWISE SPECIFIED, DIMENSIONS DO NOT INCLUDE PLATING.								
	DENOTES CRITICAL CHARACTERISTICS.							
CPK	DENOTES CPK DIMENSIONS, -MINIMUM CPK VALUE							
	DENOTES A CHARACTERISTIC THAT PROVIDES AN INDICATION OF PROCESS PERFORMANCE. PROCEDURE FOR MEASUREMENT AND TRACKING TO BE DEFINED IN LITTELFUSE INSPECTION INSTRUCTIONS							
CP	DENOTES CP DIMENSIONS, -MINIMUM CP VALUE MUST BE WITHIN THE DIMENSIONAL LIMITATIONS SHOWN ON DRAWING AND INITIALLY LOCATED TO ALLOW FOR MAXIMUM TOOL LIFE							
COPIES TO		MATL SPEC						
		SEE NOTES						
1	9	18	FINISH					
2	10	19						
3	12	20	SEE NOTES					
4	13	21						
5	14	23	DRW	FYUE	DATE	05/Aug/16	SCALE	1:1
6	15	33	CHK		DATE		SUPER DR	
7	16	43	APPD		DATE		FINISH GOOD WT	
8	17	53				GRAMS/PIECE		
TOLERANCE UNLESS OTHERWISE SPECIFIED								
ONE PLACE DEC +/- .3			THREE PLACE DEC +/- .100					
TWO PLACE DEC +/- .15			ANGULAR +/- 1°					
3RD ANGLE PROJECTION 		TITLE						
		MINI IN-LINE FUSEHOLDER						
		REVISION		DRWG. NO.		OUTLINE		
		A		OFHM0004ZXJ				
DES PLAINES, ILLINOIS 60016								

METRIC

CAD GENERATED DRAWING - NO PENCIL CHANGES ALLOWED