CAD GENERATED DRAWING - NO PENCIL CHANGES ALLOWED

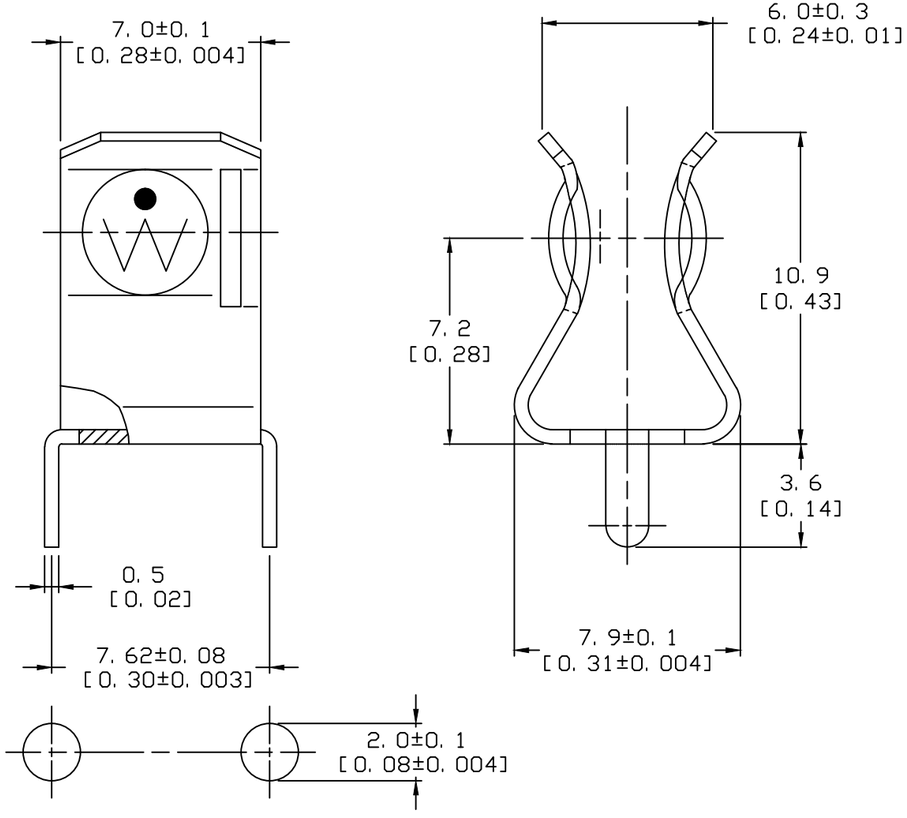

RECOMMENDED MOUNTING PATERN

ENVIRONMENT:
RoHS
Pb FREE

ELECTRICAL DATA:
VOLTAGE RATING: 500V
MAX CURRENT/POWER: 10A/4W

ITEM NO	COMPONENT NO	DESCRIPTION	QTY/M	U/M

BILL OF MATERIAL

MATL SPEC 0.5mm C2680 BRASS
FINISH

		DATE	SCALE	5:1
DRW	MQR	10/13/10		
CHK	BVS	10/19/10	SUPER DRW	
APPD	BVS	10/19/10	FINISH GOOD WT	GRAMS/PIECE

TOLERANCE UNLESS OTHERWISE SPECIFIED
TWO PLACE DEC ±.25[.01] FRACTION ±
THREE PLACE DEC ±.100[.004] ANGULAR ±1°

TITLE: PC MOUNT 6.3X32mm FUSE CLIP

3RD ANGLE PROJECTION

COPIES TO
1 9 18
2 10 19
3 12 20
4 13 21
5 14 23
6 15 33
7 16 43
8 17 53

Littelfuse®
DES PLAINES, ILLINOIS 60016

REVISION: A
DRWG. NO. 1020701009 OUTLINE

LTR	REVISION	CHK	APD
A	000252ERP - RELEASED 10/13/10 MQR		

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN BRACKETS [ ] ARE INCHES

UNLESS OTHERWISE SPECIFIED, DIMENSIONS DO NOT INCLUDE PLATING.

● DENOTES CRITICAL CHARACTERISTICS.

CPK DENOTES CPK DIMENSIONS,-MINIMUM CPK VALUE

ST DENOTES A CHARACTERISTIC THAT PROVIDES AN INDICATION OF PROCESS PERFORMANCE. PROCEDURE FOR MEASUREMENT AND TRACKING TO BE DEFINED IN LITTELFUSE INSPECTION INSTRUCTIONS.

CP DENOTES CP DIMENSIONS,-MINIMUM CP VALUE MUST BE WITHIN THE DIMENSIONAL LIMITATIONS SHOWN ON DRAWING AND INITIALLY LOCATED TO ALLOW FOR MAXIMUM TOOL LIFE.