THIS DRAWING AND THE INFORMATION CONTAINED WITHIN IT ARE CONFIDENTIAL AND MAY NOT BE COPIED OR DISCLOSED WITHOUT THE WRITTEN PERMISSION OF LITTELFUSE.

PART NUMBER	DESCRIPTION	NOTES
178.4265.0002	HOLDER FOR FLR (ATO) PCB 42V	-

REVISIONS				
ZONE	REV.	DESCRIPTION	DATE	APPROVED
	A	PCO #5300044. INITIAL RELEASED. DSILVA.	4/21/2022	L.ARGIL

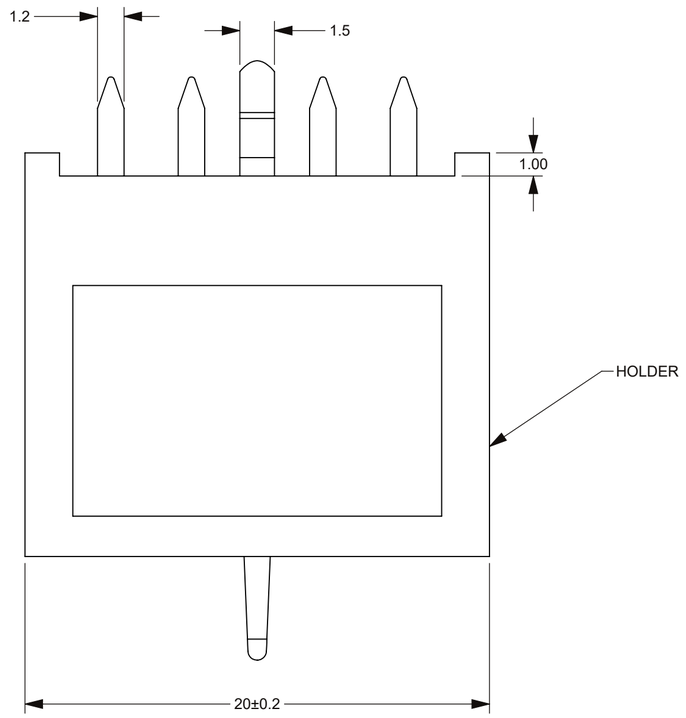

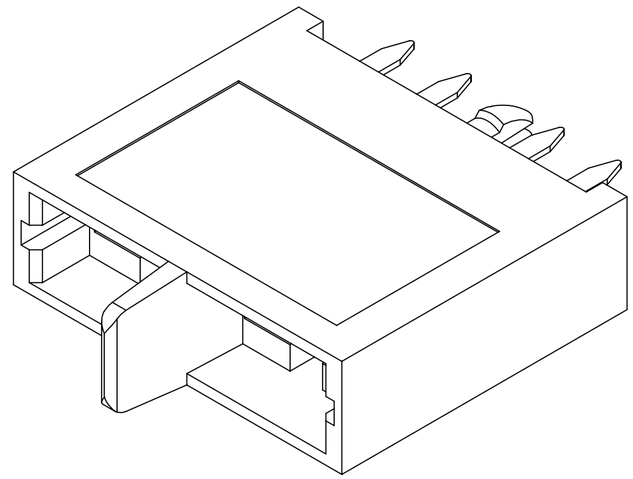

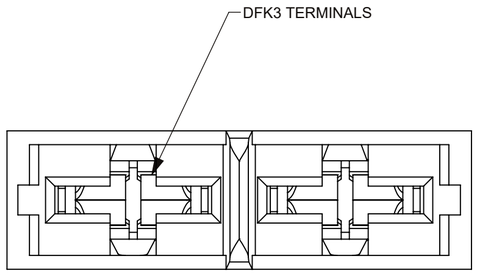

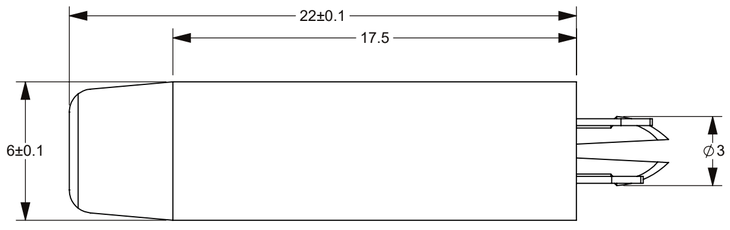

NOTES:
1. MATERIAL:
   1. HOLDER: THERMOPLASTIC
   2. DFK3 CONTACTS: COPPER ALLOY

NO.	COMPONENT NO.	COMPONENT NAME	QTY	U
2	-	DFK3 TERMINALS	2	EA
1	-	HOLDER	1	EA

TOLERANCES UNLESS OTHERWISE SPECIFIED (REF. ISO 2768-mK)

.5 to 3	>3 to 6	>6 to 30	>30 to 120	>120 to 400								ANGLE
±0.10	±0.10	±0.20	±0.30	±0.50								NONE

DIMENSIONS ARE SHOWN IN MILLIMETERS. DIMENSIONS AND TOLERANCES ARE DEFINED ACCORDING TO ANSI/ASME Y14.5-1994.

PER CHI-NPD20-0008 PROCEDURE

●	FIT/ FUNCTION CRITICAL CHARACTERISTICS
<S>	SAFETY/ COMPLIANCE CRITICAL CHARACTERISTICS SYMBOL
CPK	DENOTES CPK DIMENSIONS MINIMUM CPK VALUE
ST	DENOTES A CHARACTERISTIC THAT PROVIDES AN INDICATION OF PROCESS PERFORMANCE.PROCEDURE FOR MEASUREMENTAND TRACKINGTO BE DEFINED IN LITTELFUSE INSPECTION INSTRUCTIONS
CP	DENOTES CP DIMENSIONS. -MINIMUM CP VALUE MUST BE WITHIN THE DIMENSIONAL LIMITATIONS SHOWN ON DRAWING AND INITIALLY LOCATED TO ALLOW FOR MAXIMUM TOOL LIFE

	NAME	DATE
DRAWN	DSILVA	4/13/2022
CHECKED	-	-
	-	-
	-	-

FORM NO: CVP-PE40-0005 REV B

THIRD ANGLE PROJECTION

DO NOT SCALE DRAWING

Littelfuse
Expertise Applied | Answers Delivered

TITLE: PCB FUSEHOLDER 42V 4 PINS EACH

SIZE	DWG. NO.	REV.
C	OL-178.4265.0000	A

SCALE 5:1 SHEET 1 OF 1