

14.98	.390
15.74	.620
26.16	1.030
28.93	1.140
38.10	1.500

EX-8119

COLE-HERSEE CO. NPM

55021-08

SCREW , BRASS , 6-32 UNC - 2A THD. (3 REQ'D)

TERMINAL, BRASS (3 REQ'D)

CASE, STEEL, CAD. PLT.

INSULATOR, BAKELITE


HEX-NUT, STEEL, CAD. PLT.

FACE NUT, BRASS, NICKEL PLT.

14.98 DIA. X 1.52 THK.

MTG. STEM, $\frac{15}{32}$ - 32 UNS - 2A
BRASS, NICKEL PLT.


KEYWAY 0.96 DEEP
X 1.82 WIDE

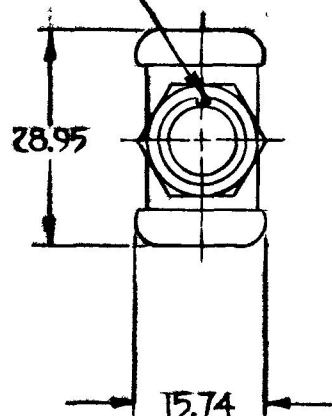

MOM. ON

OFF

MOM" ON

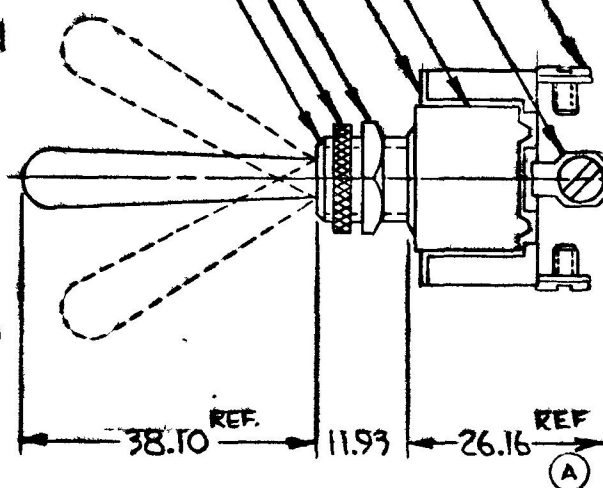

NOTE

⑧ SILVER CONTACT SURFACES

METRIC

25 AMP-14 VOLT D.C.

DO NOT SCALE

LET	WAS	DATE	BY	LET	WAS	DATE	BY	MATERIAL	DRAWN	CHECKED	APPRV'D	SCALE	DESCRIPTION	DATE DRAWN
								—H—	✓K	TY 4-5-78		1:1	BASIC, WITH 1 1/2" LONG BAT HANDLE	3-29-78
				B	ADD NOTE/25932	9/15/93	JH	FINISH —H—	COLE-HERSEE COMPANY BOSTON, MASS. 02127, U.S.A.					DATE BLUEPRINT
				A	END TELEPHONE 20420	12-28-78	KP	TOLERANCES FRACTIONAL ± DECIMAL ±0.25	TOGGLE SWITCH					55021-08
					ISSUED	4-6-78	TY							

SPAULDING CO , INC 21-10961

Confidential Property of Cole Hersee