
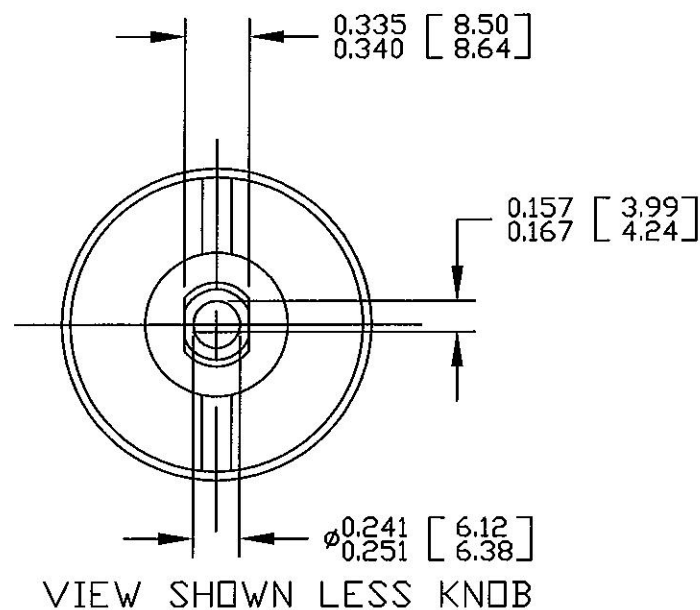
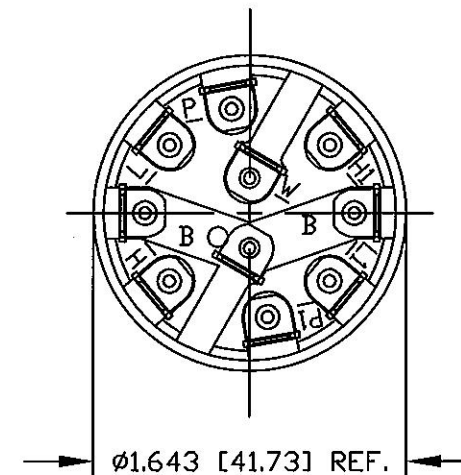
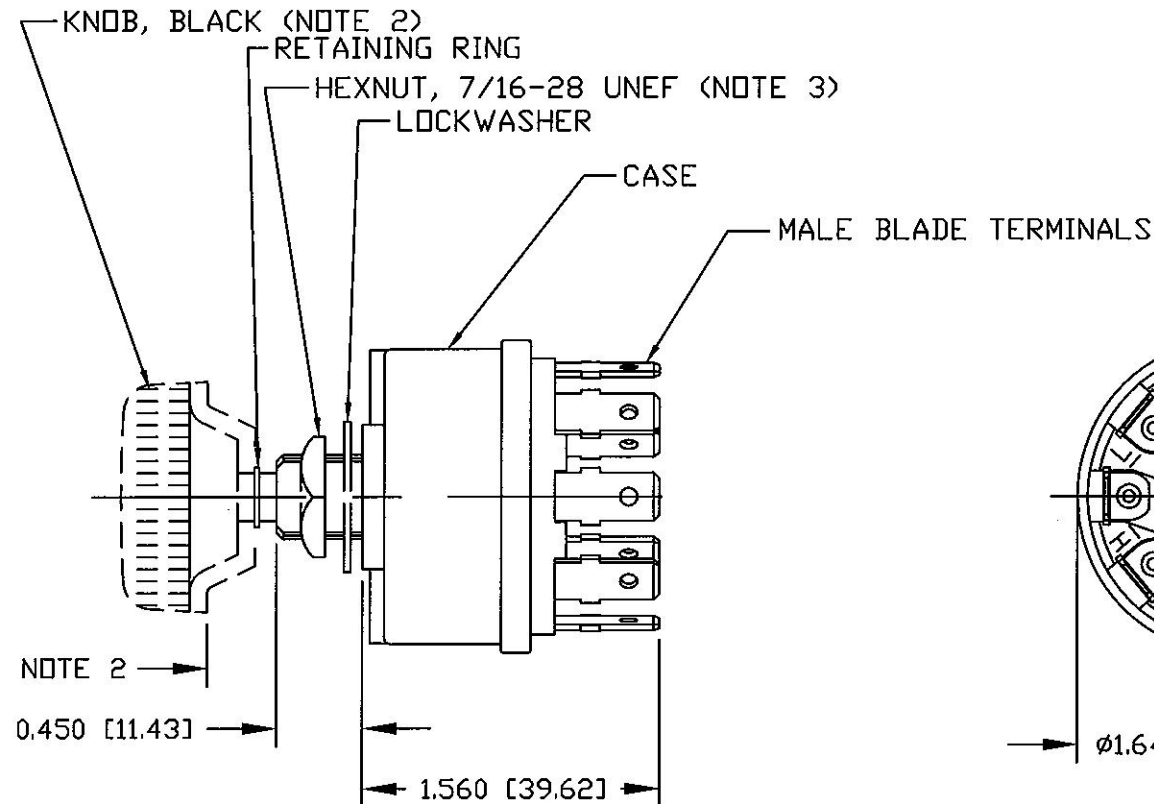


4

3

2

1

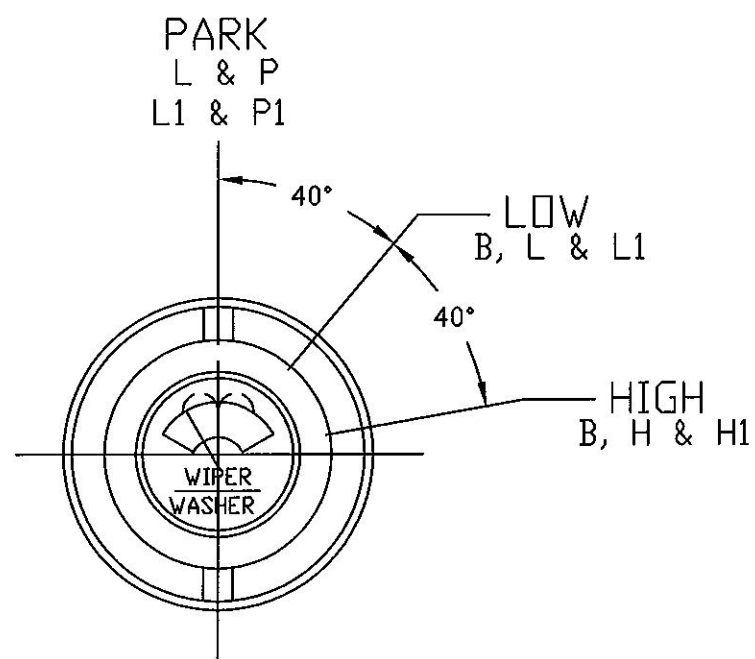

P	PARK
P1	
L	LOW
L1	
H	HIGH
H1	
B	BATTERY
W	WASHER
CIRCUIT	DESCRIPTION
LEGEND	

NOTES:

1. ALL STEEL PARTS PLATED
2. PUSH KNOB TO WASH-"PARK", "LOW" & "HIGH"
3. INSTALLATION TORQUE 2.7Nm (2 FT. LBS.)
4. 20 AMPS @ 12 V.D.C.
5. OPERATING TEMP RANGE -40°C TO + 85°C
6. USE APPROPRIATE FEMALE TERMINALS THAT MATE TO STANDARD 1/4" X 0.032" BLADE TERMINALS

Revision Control Record				Rev.	Description of Change	ECN No.	Date	Tolerances Unless otherwise specifically noted, the following are default tolerances:			PROPRIETARY INFORMATION This Engineering Drawing, and the information contained herein, is proprietary to Cole Hersee Company and may not be disclosed, re-produced, or in any other way transferred or communicated to any other party without the express written consent of an authorized representative of Cole Hersee Company.		Special Characteristics:		Cole Hersee Co.	
Rev.	Description of Change	ECN No.	Date					2-places +/- 0.02"	3-places +/- 0.005"	Angular +/- 1°		 Critical Characteristic, relating to Safety and/or Regulatory Compliance	 Significant Characteristic relating to Process Control	 Control Dimension relating to Form - Fit - Function as defined by Cole Hersee Company and/or the Customer		20 Old Colony Ave., South Boston, MA, 02127 Phn: 617-288-2100 Web: www.colehersee.com
D	ADD NOTE 5 & 6	09253	04/15/09												Description: DUAL W/W & WASHER SW, P.M MOTOR WITH DYNAMIC PARKING	
															Drawing / Part No.: 75236	
															Current Rev. D	
FORM CHT-6 (2/07)								Used On or Ref.: EX-20879				Scale: 1:1	Drawn BY: RJF	Date Drawn: 04/22/85	Pg. 1 of 1	

4

3

2

1