

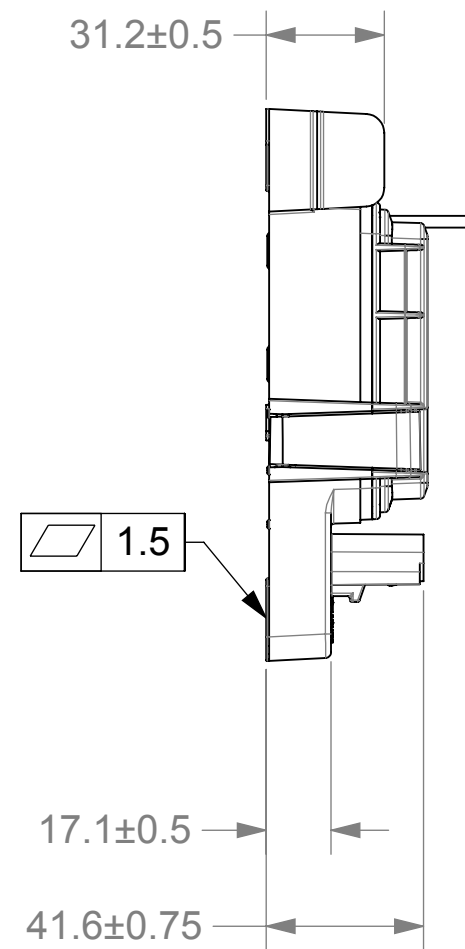
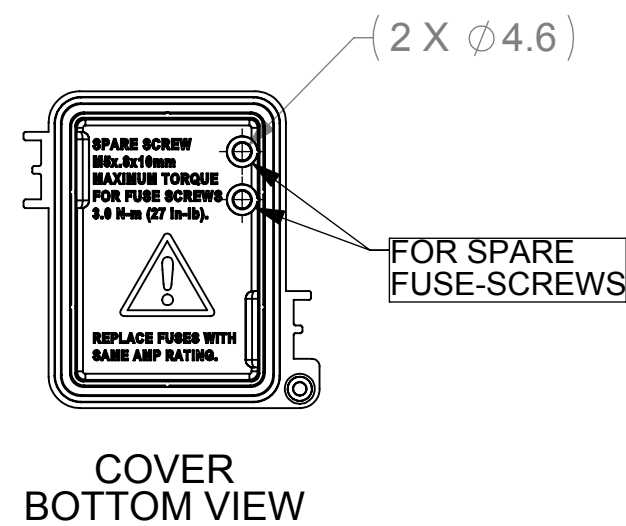
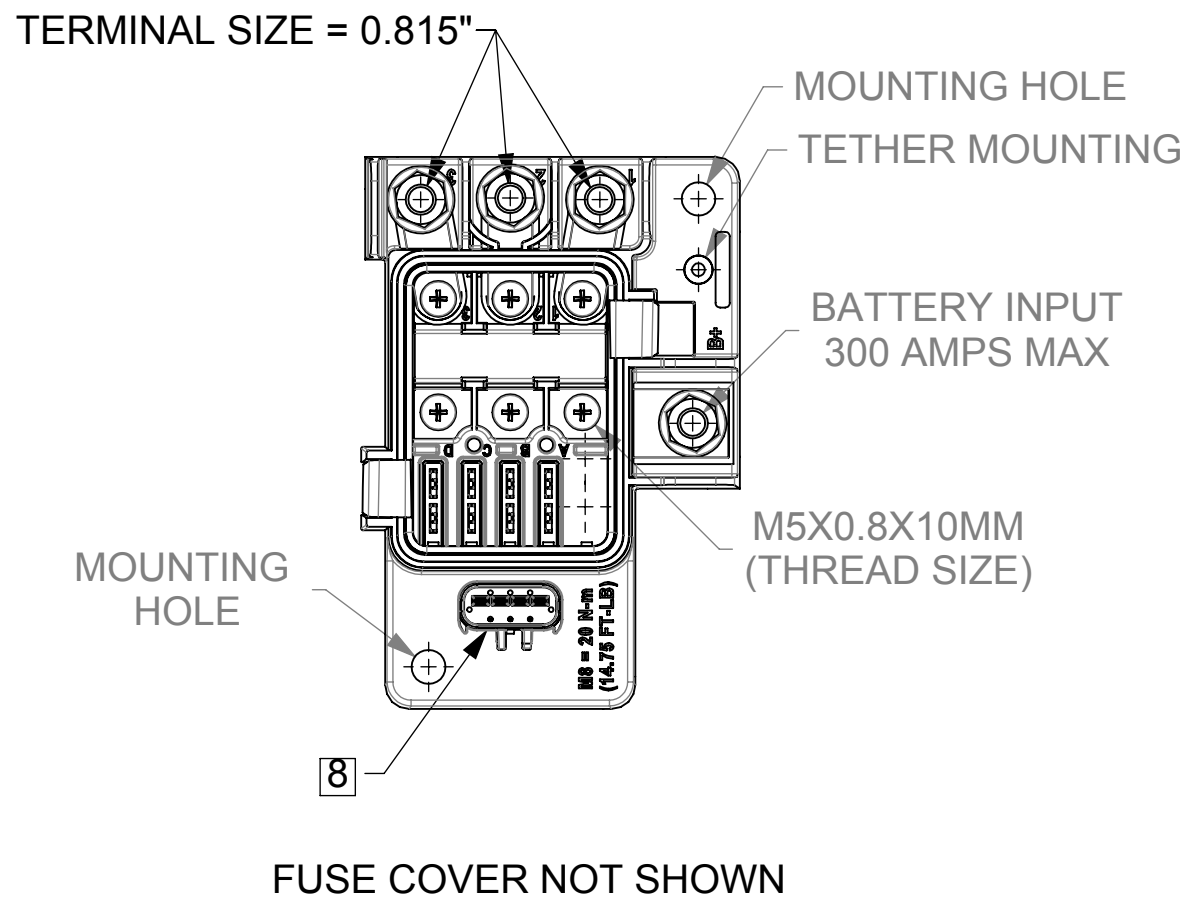


- NOTES:
1. DRAWING SHOWN WITH FUSES INSTALLED, FUSE LOADING CONFIGURATION DEPENDANT
 2. ALL STUDS TO BE STAINLESS STEEL WITH ROLLED THREADS
 3. ALL BUS BARS TO BE TIN PLATED COPPER
 4. WEIGHT: 0.8 LB
 5. RECCOMENDED TORQUE VALUES:
 1. MIDI FUSES - 3 N-m(27 IN-LB)
 2. RECOMMENDED INPUT TERMINAL STUD NUT TORQUE - 20 N-m(15 FT-LB)
 3. RECOMMENDED OUTPUT TERMINAL STUD NUT TORQUE - 20 N-m(15 FT-LB)
 6. DRAWING SHOWN WITHOUT OPTIONAL LABEL, LABEL LOCATED ON OUTSIDE OF COVER
 7. INCLUDED HARDWARE (TO BE INSTALLED AT LESS THAN 300 RPM);
 4. M8x1.25 18-8 STAINLESS STEEL 4X
 8. CONNECTOR HOUSING: FCI APEX 2.8MM FEMALE 4-WAY
FCI P/N: 54200409
 9. MATERIAL:
HOUSING: GLASS FILLED NYLON 94V-0 COVER: PC 94V-0
 10. MIN/MAX TEMPERATURE RATING: OPESTRATIONAL: -40C~100C NON-OPERATIONAL: -55C~125C
 11. MAX CURRENT INPUT: 350 AMPS

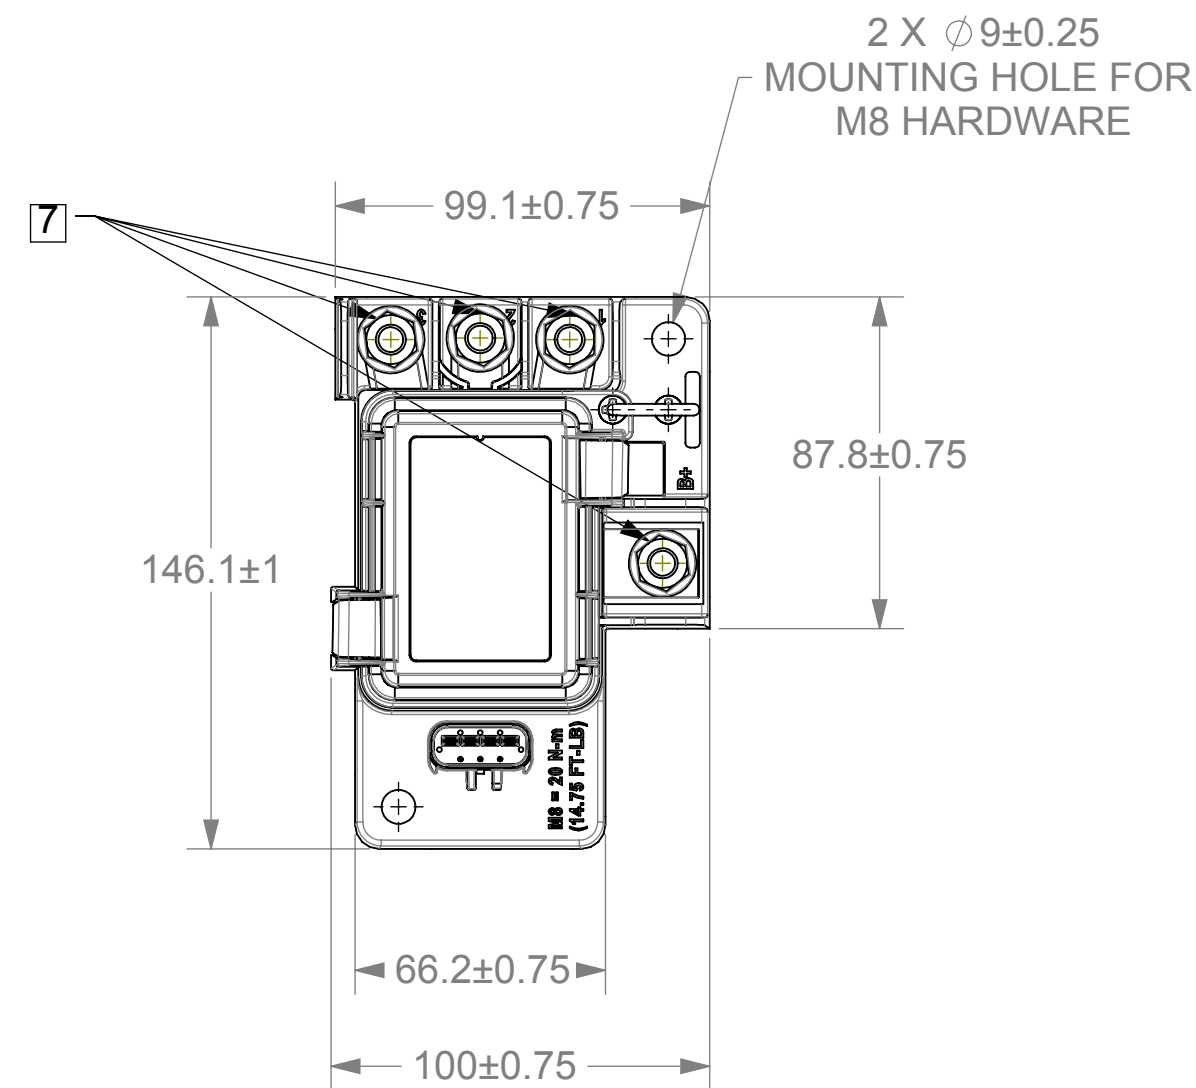

REVISIONS				
ZONE	REV.	DESCRIPTION	DATE	APPROVED
	A	PER ECH515700: INITIAL RELEASE OUTLINE DRAWING	3/22/2016	J. LIU

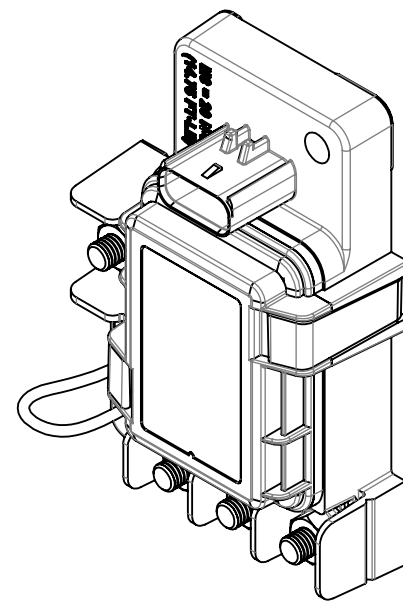

DIMENSIONS ARE IN MM.		NAME	DATE	 Expertise Applied Answers Delivered 805 W. Orchard DR., Ste. 6, Bellingham, WA 98225 Phone (360)738-9010 Fax (360)738-0372
	DRAWN	J. LIU	3/22/2016	
	CHECKED	-	-	
	-	-	-	
	-	-	-	
DIMENSIONS AND TOLERANCES ARE DEFINED ACCORDING TO ANSI / ASME Y14.5M-1994				 Expertise Applied Answers Delivered 805 W. Orchard DR., Ste. 6, Bellingham, WA 98225 Phone (360)738-9010 Fax (360)738-0372
THIS DRAWING AND THE INFORMATION CONTAINED WITHIN IT ARE CONFIDENTIAL AND MAY NOT BE COPIED OR DISCLOSED WITHOUT THE WRITTEN PERMISSION OF LITTELFUSE.				 Expertise Applied Answers Delivered 805 W. Orchard DR., Ste. 6, Bellingham, WA 98225 Phone (360)738-9010 Fax (360)738-0372
	THIRD ANGLE PROJECTION			
				
	SIZE	DWG. NO.		REV. A
	C	OL-880073		
	SCALE 1:2			
	SHEET 1 OF 1			