


# DSS16-01AS


## 100 V, 16 A Schottky Rectifier Diode

RoHS

Pb

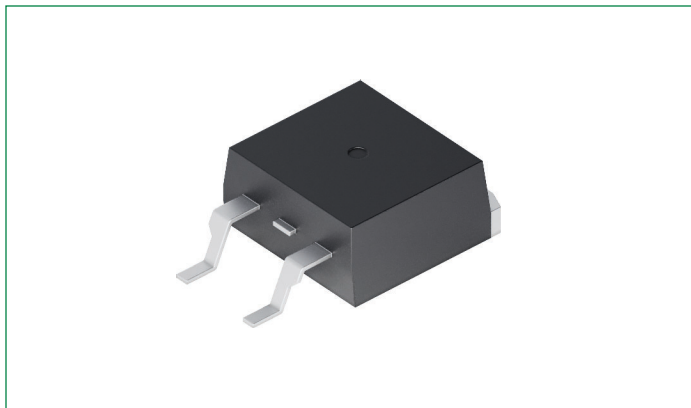

### Pinout Diagram (TO-263AB)

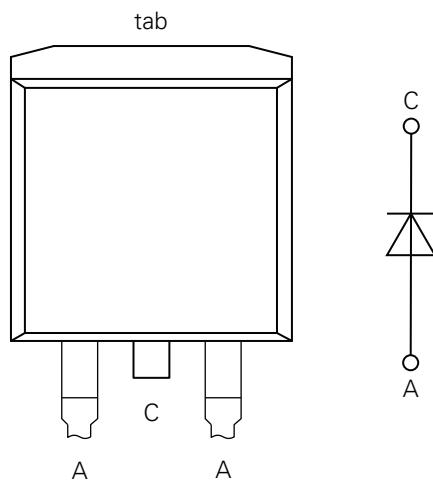

**C:** Cathode; **A:** Anode; **tab:** Cathode

### Features

- Extremely low switching losses
- Very low  $V_F$
- Low  $I_{RM}$  values

### Benefits

- Low voltage peaks for reduced protection circuits
- High reliability circuit operation
- Low-noise switching
- Improved thermal behavior
- Longer lifetime of the system

### Applications

- Rectifiers in Switch Mode Power Supplies (SMPS)
- Free wheeling diode in low voltage converters

### Package

- This is a Pb-free device
- Terminals finish: 100% Pure Tin
- RoHS compliant
- Epoxy meets UL 94V-0

### Product Summary

Characteristic	Value	Unit
$V_{RRM}$	100	V
$I_{F(AV)}$	16	A
$V_F$	0.65	V

**Maximum Ratings** ( $T_A = 25\text{ }^\circ\text{C}$  unless otherwise specified)

Symbol	Characteristics	Condition	Max.	Units
$V_{RRM}$	Repetitive Peak Reverse Voltage	-	100	V
$V_{RWM}$	Working Peak Reverse Voltage			
$V_R$	Reverse Voltage			
$I_{F(AV)}$	Average Forward Current	50% duty cycle @ $T_{cc} = 155\text{ }^\circ\text{C}$ , rectangular wave form	16	A
$I_{FSM}$	Non-Repetitive Surge Forward Current	10 ms, Half Sine pulse, $T_{vj} = 25\text{ }^\circ\text{C}$	230	A
$P_{tot}$	Total Power Dissipation	$T_c = 25\text{ }^\circ\text{C}$	105	W
$E_{AS}$	Non-repetitive Avalanche Energy	$I_{AS} = 10\text{A}$ , $L = 100\text{ }\mu\text{H}$ , $T_{vj} = 25\text{ }^\circ\text{C}$	5	mJ
$I_{AR}$	Repetitive Avalanche Current	$V_A = 1.5$ , $V_R$ typ., $f = 1\text{ kHz}$	1	A

**Electrical Characteristics** ( $T_A = 25\text{ }^\circ\text{C}$  unless otherwise specified)

Symbol	Characteristics	Conditions	Typ.	Max.	Units
$V_{F1}$	Forward Voltage Drop <sup>1</sup>	@ 16 A, Pulse, $T_{vj} = 25\text{ }^\circ\text{C}$	-	0.83	V
$V_{F2}$		@ 16 A, Pulse, $T_{vj} = 125\text{ }^\circ\text{C}$	-	0.65	V
$I_{R1}$	Reverse Current <sup>1</sup>	@ $V_R = \text{rated } V_R$ , $T_{vj} = 25\text{ }^\circ\text{C}$	-	500	$\mu\text{A}$
$I_{R2}$		@ $V_R = \text{rated } V_R$ , $T_{vj} = 125\text{ }^\circ\text{C}$	-	5	mA
$C_j$	Junction Capacitance	@ $V_R = 12\text{ V}$ , $T_c = 25\text{ }^\circ\text{C}$ $f_{SIG} = 1\text{ MHz}$	334	-	pF


**Note 1:** Pulse width < 300  $\mu\text{s}$ , duty cycle < 2%

**Thermal-Mechanical Specifications**


Symbol	Characteristics	Condition	Specification	Units
$T_{vj}$	Virtual Junction Temperature Range	-	-55 to +175	$^\circ\text{C}$
$T_{op}$	Operating Temperature Range	-	-55 to +150	$^\circ\text{C}$
$T_{stg}$	Storage Temperature Range	-	-55 to +150	$^\circ\text{C}$
$F_C$	Mounting force with clip	-	Min 20 Max 60	N
$R_{th(j-c)}$	Maximum Thermal Re(stance Junction to Case)	DC operation	1.40	K/W
$R_{th(c-h)}$	Typical Thermal Resistance Case to Heat Sink	-	0.25	K/W
wt	Approximate Weight	-	1.85	g

## Characteristic Curves


**Fig. 1. Typical Forward Characteristics**

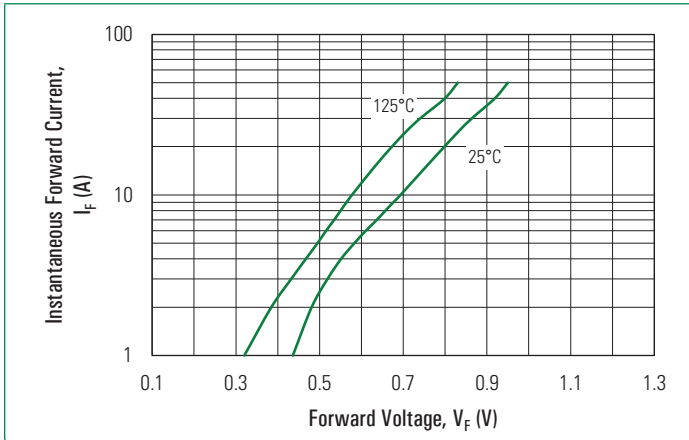


**Fig. 2. Typical Reverse Characteristics**

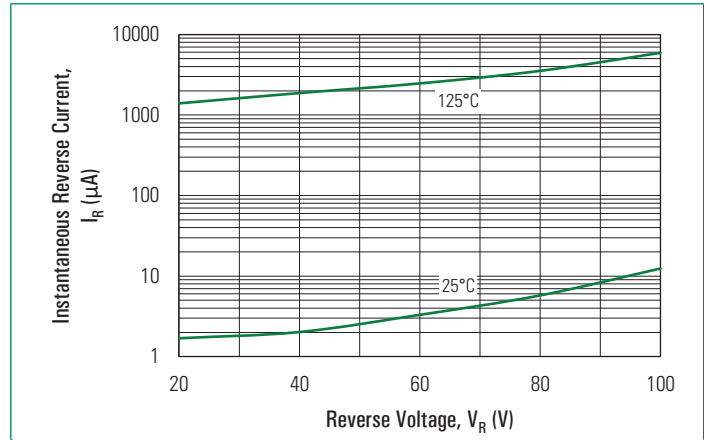

**Fig. 3. Typical Junction Capacitance**

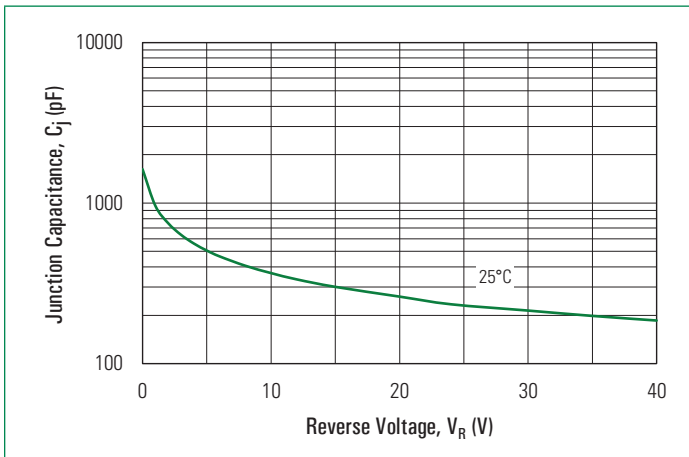


Part Outline Drawing (TO-263AB)

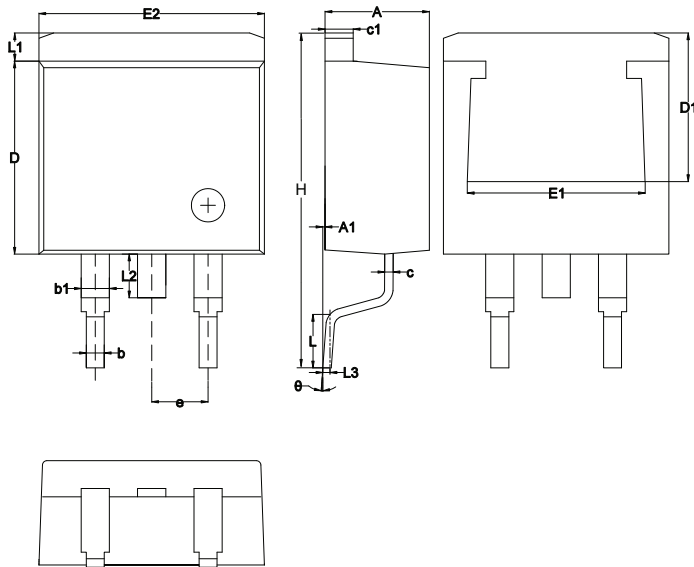

Symbol	Inches			Millimeters		
	Min.	Typical	Max.	Min.	Typical	Max.
A	0.16	–	0.19	4.06	–	4.83
A1	0	–	0.010	0	–	0.26
b	0.020	–	0.039	0.51	–	0.99
b1	0.045	–	0.070	1.14	–	1.78
c	0.012	–	0.029	0.31	–	0.74
c1	0.045	–	0.064	1.14	–	1.65
D	0.330	–	0.379	8.38	–	9.65
D1	0.251	–	–	6.40	–	–
E1	0.244	–	–	6.22	–	–
E2	0.379	–	0.420	9.65	–	10.67
e	0.100 BSC			2.54 BSC		
H	0.575	–	0.625	14.61	–	15.88
L	0.070	–	0.110	1.78	–	2.80
L1	–	–	0.066	–	–	1.68
L2	–	–	0.086	–	–	2.20
L3	0.010 BSC			0.255 BSC		
θ	0	–	8°	0	–	8°

Part Number and Marking

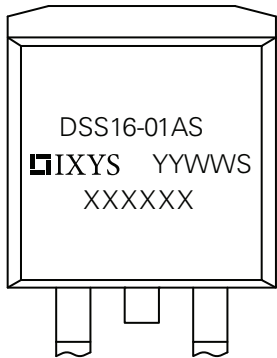


- D = Diode
- S = Schottky Diode
- S = Product Generation
- 16 = Current Rate
- 01 = Voltage Rating
- AS = Package Code
- YY = Year
- WW = Work Week
- S = Plant Location Code
- XXXXXX = Lot Number

Ordering Information

Part Number	Marking	Packing Mode	Quantity
DSS16-01AS-TRL	DSS16-01AS	Reel	800 pcs/ reel

Carrier Tape Specification (TO-263AB)

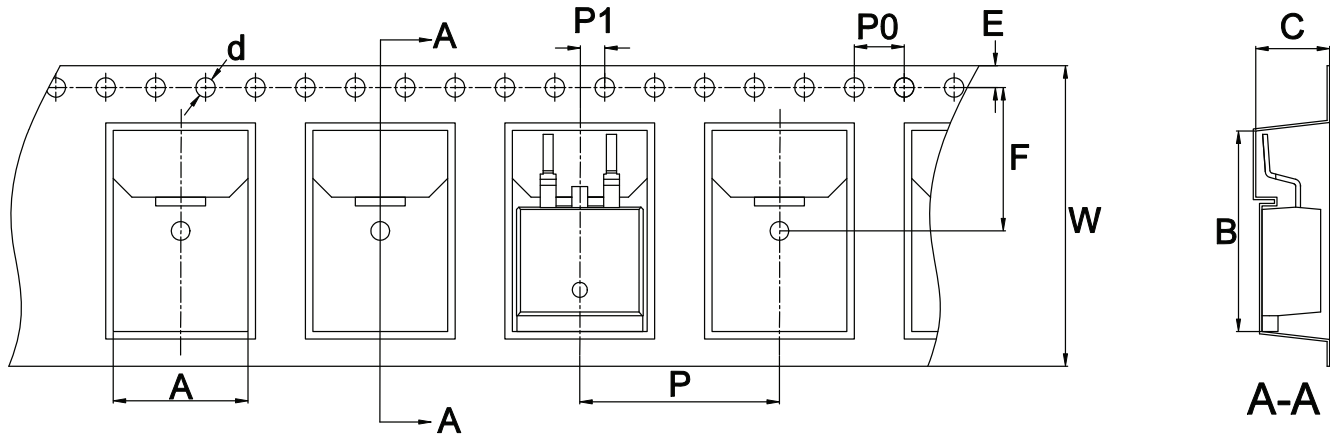

Symbol	Inches			Millimeters		
	Min.	Typical	Max.	Min.	Typical	Max.
A	0.421	–	0.429	10.70	–	10.90
B	0.631	–	0.639	16.03	–	16.23
C	0.201	–	0.209	5.11	–	5.31
d	0.057	–	0.065	1.45	–	1.65
E	0.065	–	0.07	1.65	–	1.85
F	0.449	–	0.457	11.40	–	11.60
P0	0.153	–	0.161	3.90	–	4.10
P	0.626	–	0.664	15.90	–	16.10
P1	0.075	–	0.082	1.90	–	2.10
W	0.941	–	0.957	23.90	–	24.30

Disclaimer Notice

Information furnished is believed to be accurate and reliable. However, users should independently evaluate the suitability of and test each product selected for their own applications. Littelfuse products are not designed for, and may not be used in, all applications. Read complete Disclaimer Notice at <http://www.littelfuse.com/disclaimer-electronics>.



Part of:

