


REVISION						
REV	REV DATE DESCRIPTION					
Α	6/17/21	523818GCP - RELEASE MRY				

APPROXIMATE SHIPPING WEIGHT: 10 FUSES = 1.31 LB

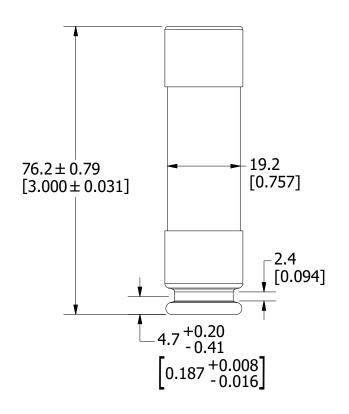

<\$>	CRITICAL CHARACTERISTIC FOR PART SAFETY/COMPLIANCE					
•		DENOTES CRITICAL CHARACTERISTICS.				
СРК	DEN	DENOTES CPK DIMENSIONS, -MINIMUM CPK VALUE				
⟨ST ⟩	OF AND	DENOTES A CHARACTERISTIC THAT PROVIDES AN INDICATION OF PROCESS PERFORMANCE. PROCEDURE FOR MEASUREMENT AND TRACKING TO BE DEFINED IN LITTELFUSE INSPECTION INSTRUCTIONS.				
CP DENOTES CP DIMENSIONS, -MINIMUM CP VALUE MUST BE WITHIN THE DIMENSIONAL LIMITATIONS SHOWN ON DRAWING AND INITIALLY LOCATED TO ALLOW FOR MAXIMUM TOOL LIFE.						
MATL SPEC			FINISH			
DRW myork		DATE 6/10/2021	SCALE NTS	FINISH GOOD WT GRAMS/PIECE		
UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN MILLIMETERS, DIMENSIONS IN BRACKETS [] ARE INCHES DIMENSIONING AND DO NOT INCLUDE PLATING. TOLERANCING TO BE INTERPRETED IN ACCORDANCE WITH ANSI Y14.5M-1994						
3RD ANGLE PROJECTION						
TITLE FIND 25 COA OUTLINE						

FLNR 35-60A OUTLINE

REVISION

DRWG NO.

OL-FLNR060

SHEET 1 OF 1