


REVISION							
REV	DATE	DESCRIPTION					
Α	6/24/21	523870GCP - RELEASE MRY					

APPROXIMATE SHIPPING WEIGHT: 10 FUSES = 1.31 LB

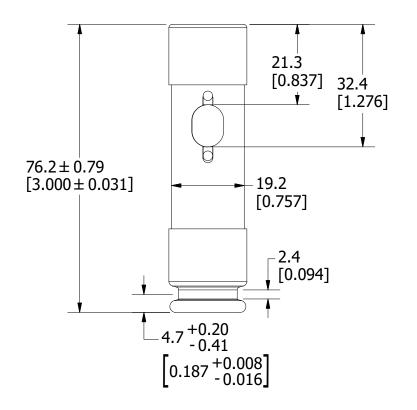

<s></s>	CRITICAL CHARACTERISTIC FOR PART SAFETY/COMPLIANCE						
•	DENOTES CRITICAL CHARACTERISTICS.						
СРК	DENOTES CPK DIMENSIONS, -MINIMUM CPK VALUE						
<u>(ST)</u>	DENOTES A CHARACTERISTIC THAT PROVIDES AN INDICATION OF PROCESS PERFORMANCE. PROCEDURE FOR MEASUREMENT AND TRACKING TO BE DEFINED IN LITTELFUSE INSPECTION INSTRUCTIONS.						
CP DENOTES CP DIMENSIONS, -MINIMUM CP VALUE MUST BE WITHIN THE DIMENSIONAL LIMITATIONS SHOWN ON DRAWING AND INITIALLY LOCATED TO ALLOW FOR MAXIMUM TOOL LIFE.							
MATL SPEC		FINISH					
DRW myork		DATE 6/14/2021	SCALE NTS	FINISH GOOD WT GRAMS/PIECE			
UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN MILLIMETERS, DIMENSIONS IN BRACKETS [] ARE INCHES DIMENSIONING AND DO NOT INCLUDE PLATING. TOLERANCING TO BE INTERPRETED IN ACCORDANCE WITH ANSI Y14.5M-1994							
3RD ANGLE PROJECTION							
TITLE FLNR-ID 35-60A OUTLINE							

REVISION

DRWG NO.

OL-FLNR060ID

SHEET 1 OF 1