

REVISION				
REV	DATE	DESCRIPTION		
Α	6/15/21	523808GCP - RELEASE MRY		



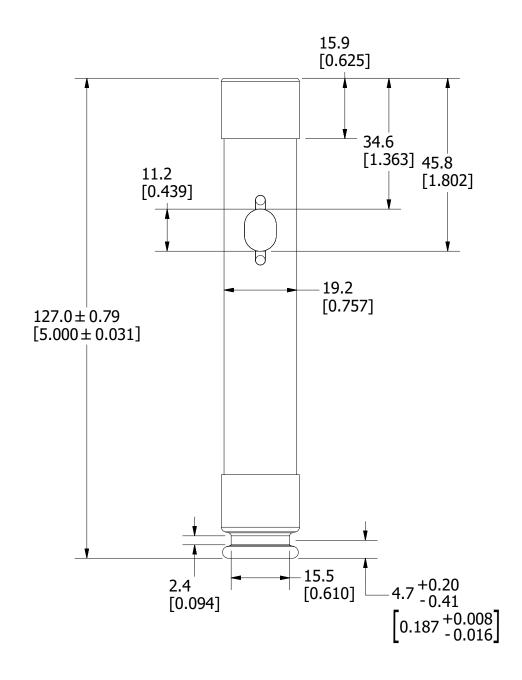

APPROXIMATE SHIPPING WEIGHT: 10 FUSES = 1.72 LB

<s></s>	CRITICAL CHARACTERISTIC FOR PART SAFETY/COMPLIANCE						
•	DENOTES CRITICAL CHARACTERISTICS.						
СРК	DENOTES CPK DIMENSIONS, -MINIMUM CPK VALUE						
<u>(ST)</u>	DENOTES A CHARACTERISTIC THAT PROVIDES AN INDICATION OF PROCESS PERFORMANCE. PROCEDURE FOR MEASUREMENT AND TRACKING TO BE DEFINED IN LITTELFUSE INSPECTION INSTRUCTIONS.						
СР	DENOTES CP DIMENSIONS, -MINIMUM CP VALUE MUST BE WITHIN THE DIMENSIONAL LIMITATIONS SHOWN ON DRAWING AND INITIALLY LOCATED TO ALLOW FOR MAXIMUM TOOL LIFE.						
MATL SPEC			FINISH				
DRW myork	DATI 6/7/	E /2021	SCALE NTS	FINISH GOOD WT GRAMS/PIECE			
LINE EGG OFFICE OFFICE OFFICE OFFICE OFFICE AND AND THE STATE OF THE S							

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN MILLIMETERS, DIMENSIONS IN BRACKETS [] ARE INCHES DIMENSIONING AND DO NOT INCLUDE PLATING. TOLERANCING TO BE INTERPRETED IN ACCORDANCE WITH ANSI Y14.5M-1994



TITLE

IDSR 1-9A OUTLINE



REVISION DRWG NO.

SHEET 1 OF 1 OL-IDSR009