




PEAK LET- THRU IN AMPERES

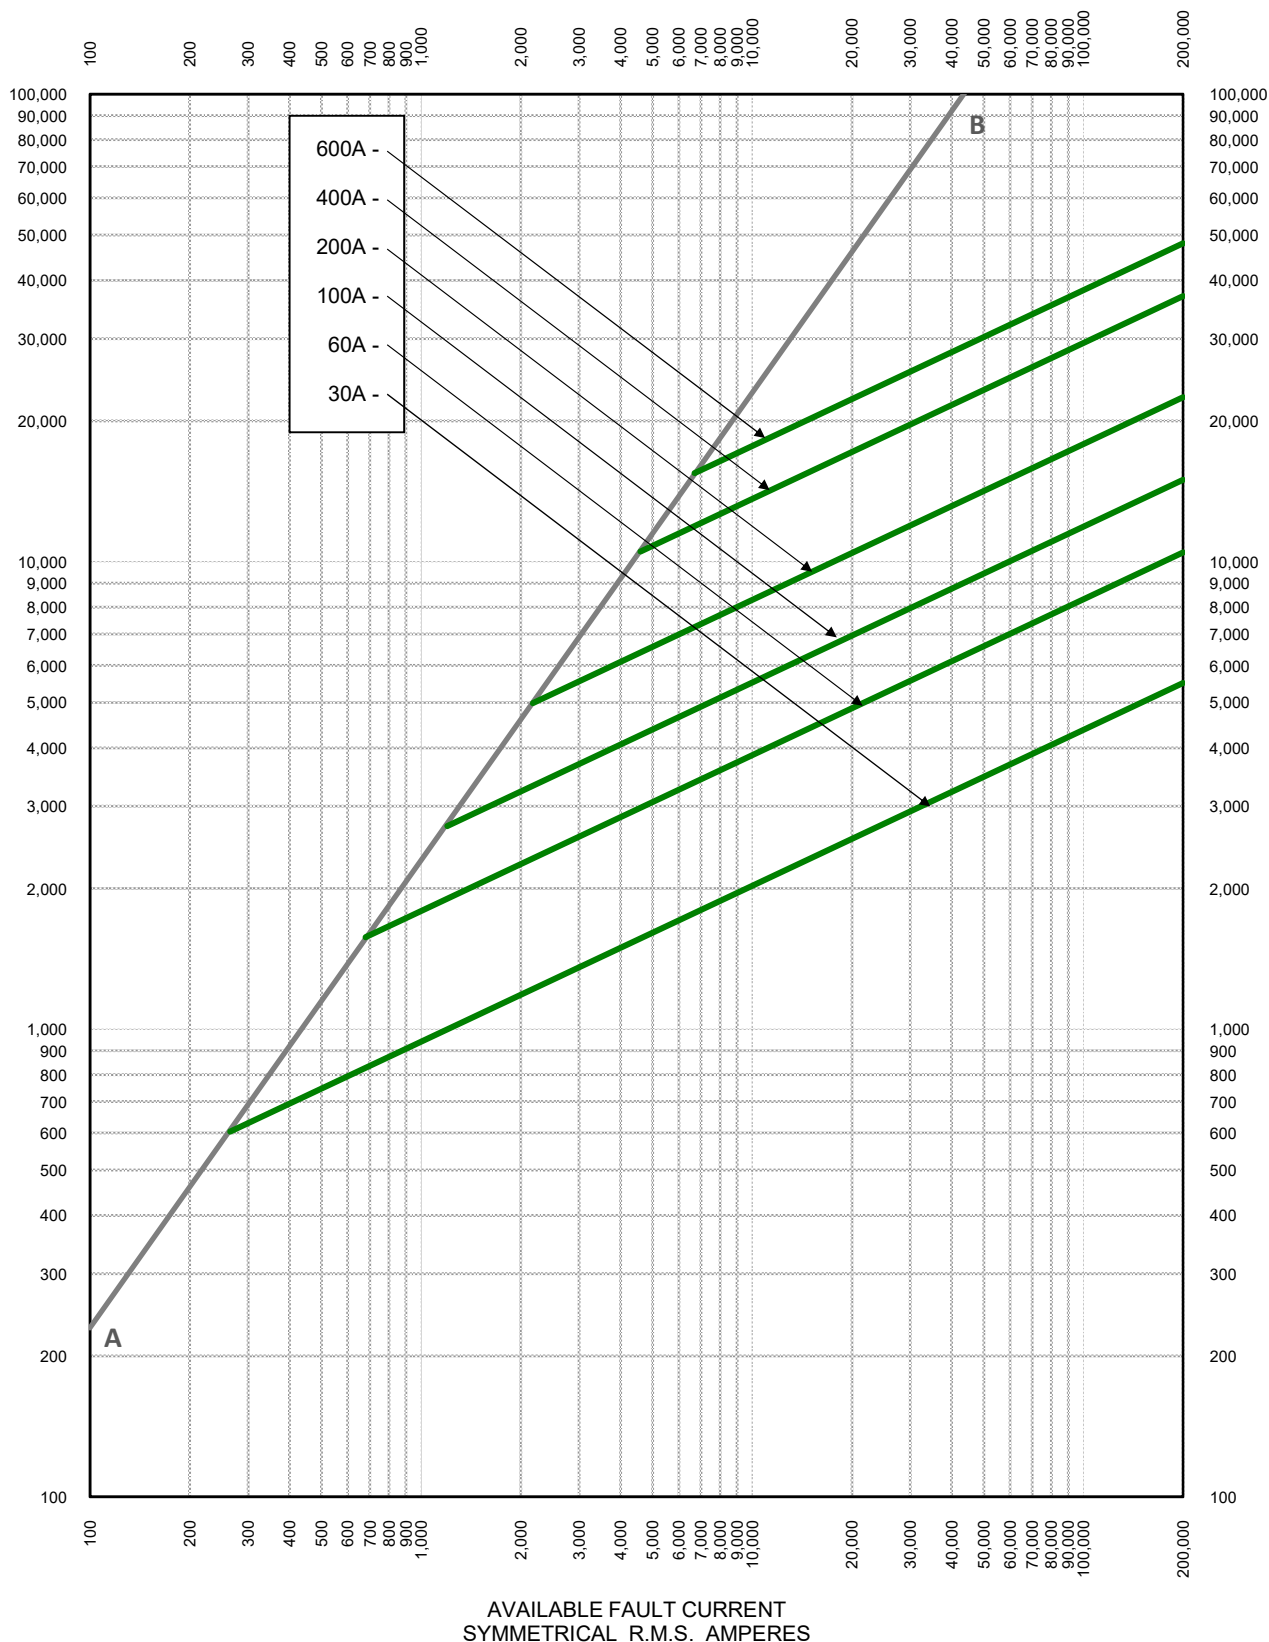

TEST VOLTAGE:	TIME CONSTANT/POWER FACTOR:	FUSE CATALOG NUMBER:
BASIS FOR DATA: AB = 15% Power Factor		JTD & JTDID 30A - 600A
 LITTELFUSE, INC. CHICAGO, IL. USA		DRAWN BY: LLL DATE: 09/23/2019 REVISION: D
PEAK LET-THRU CHARACTERISTIC CURVES		DRAWING NO.: FCC05-JTD SHEET 2 OF 6

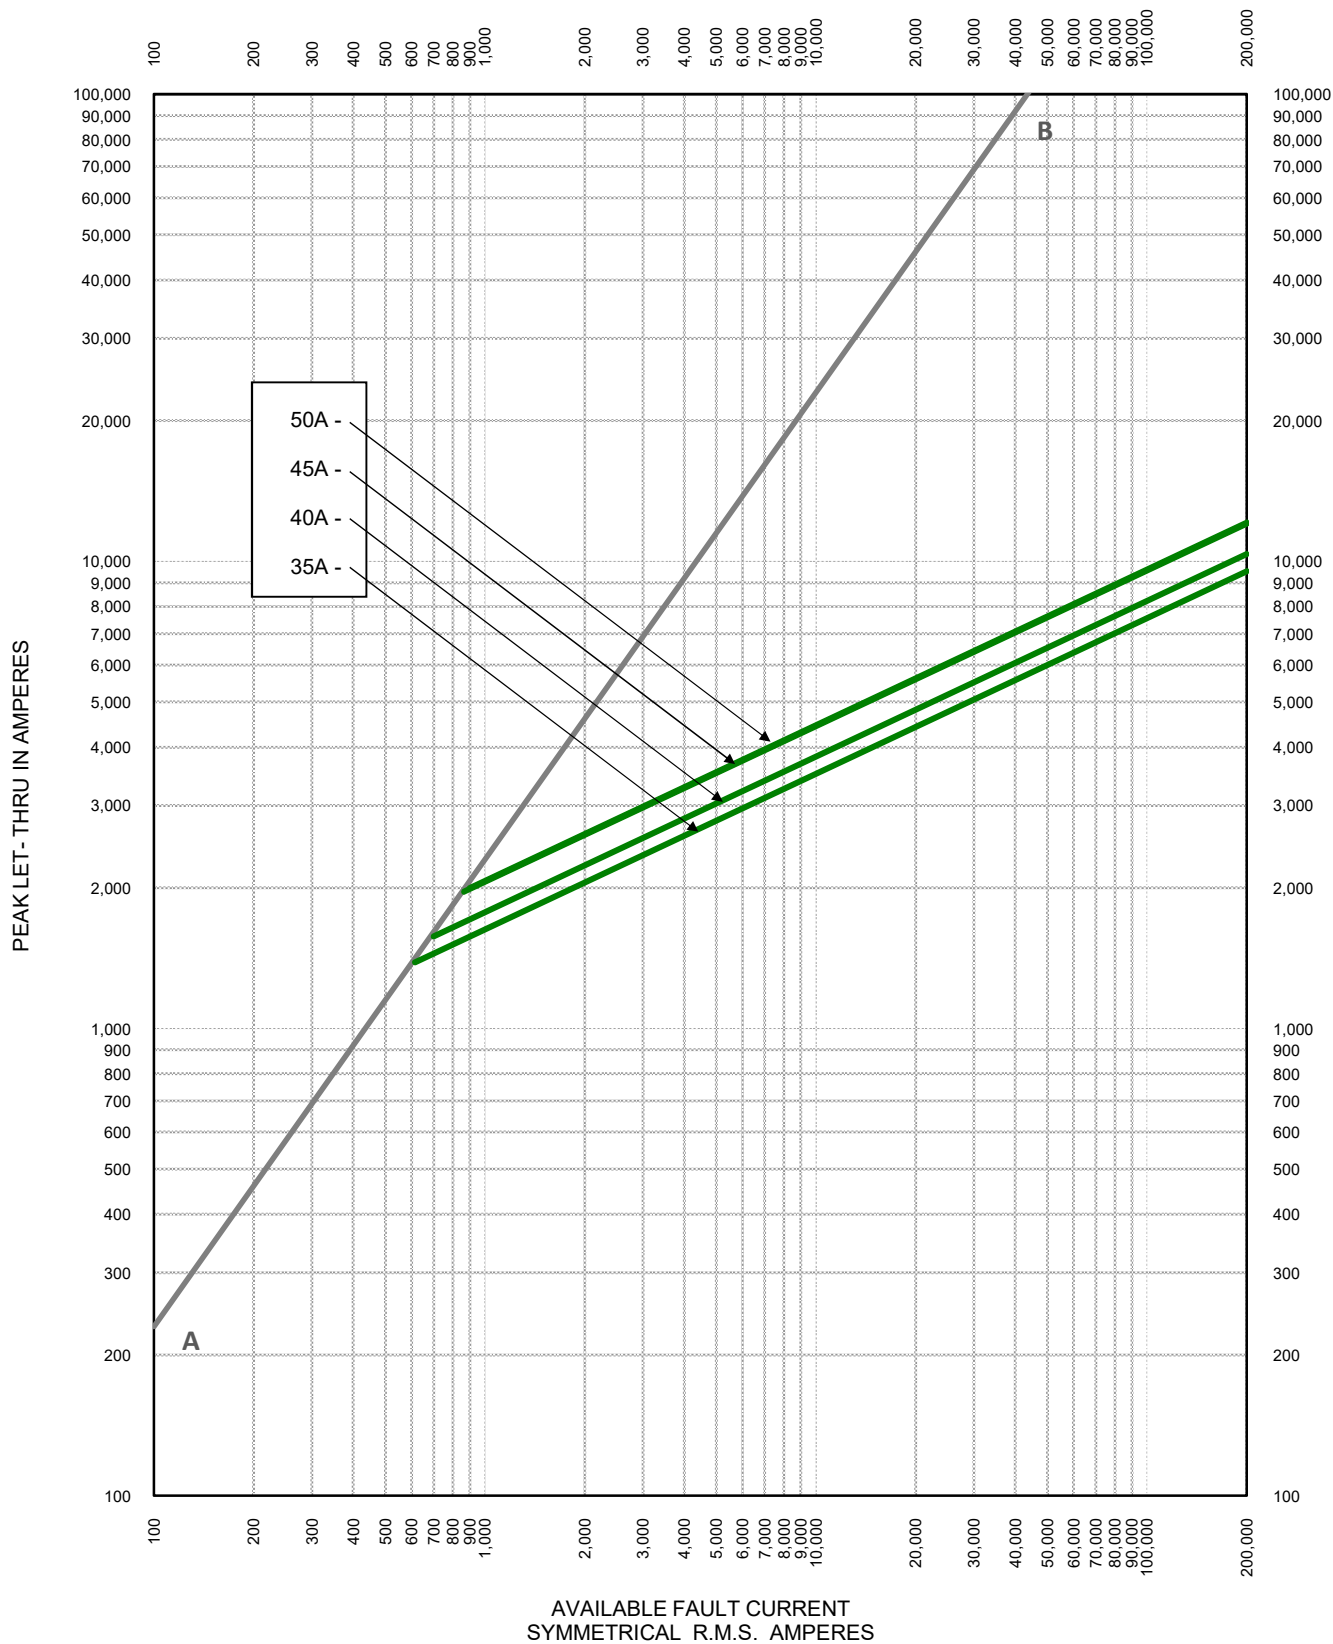


TEST VOLTAGE:	TIME CONSTANT/POWER FACTOR:	FUSE CATALOG NUMBER:
BASIS FOR DATA: AB = 15% Power Factor		JTD & JTDID 35A - 600A
 LITTELFUSE, INC. CHICAGO, IL. USA		DRAWN BY: LLL DATE: 09/23/2019 REVISION: D
PEAK LET-THRU CHARACTERISTIC CURVES		DRAWING NO.: FCC05-JTD SHEET 3 OF 6

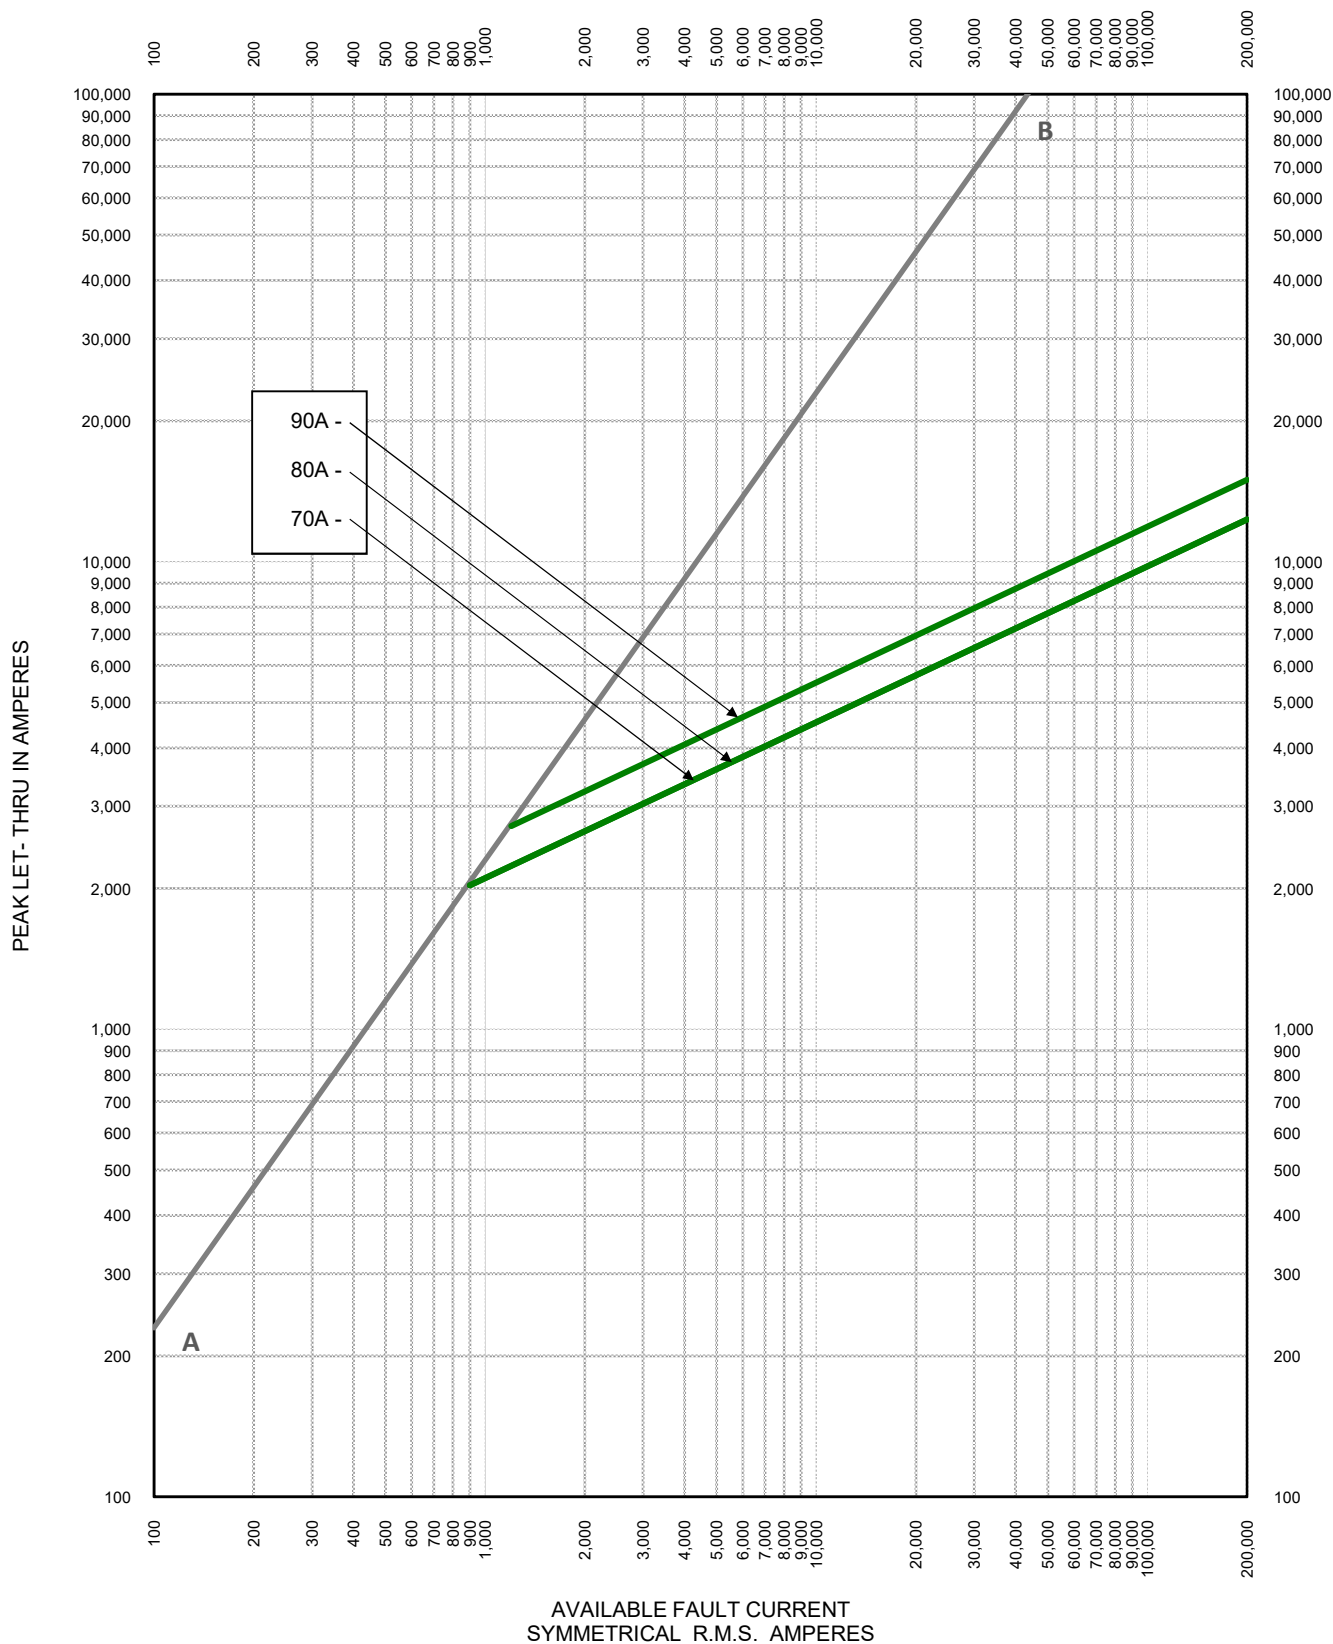


TEST VOLTAGE:	TIME CONSTANT/POWER FACTOR:	FUSE CATALOG NUMBER:
BASIS FOR DATA: AB = 15% Power Factor		JTD & JTDID 35A - 600A
 LITTELFUSE, INC. CHICAGO, IL. USA		DRAWN BY: LLL DATE: 09/23/2019 REVISION: D
PEAK LET-THRU CHARACTERISTIC CURVES		DRAWING NO.: FCC05-JTD SHEET 4 OF 6

PEAK LET- THRU IN AMPERES

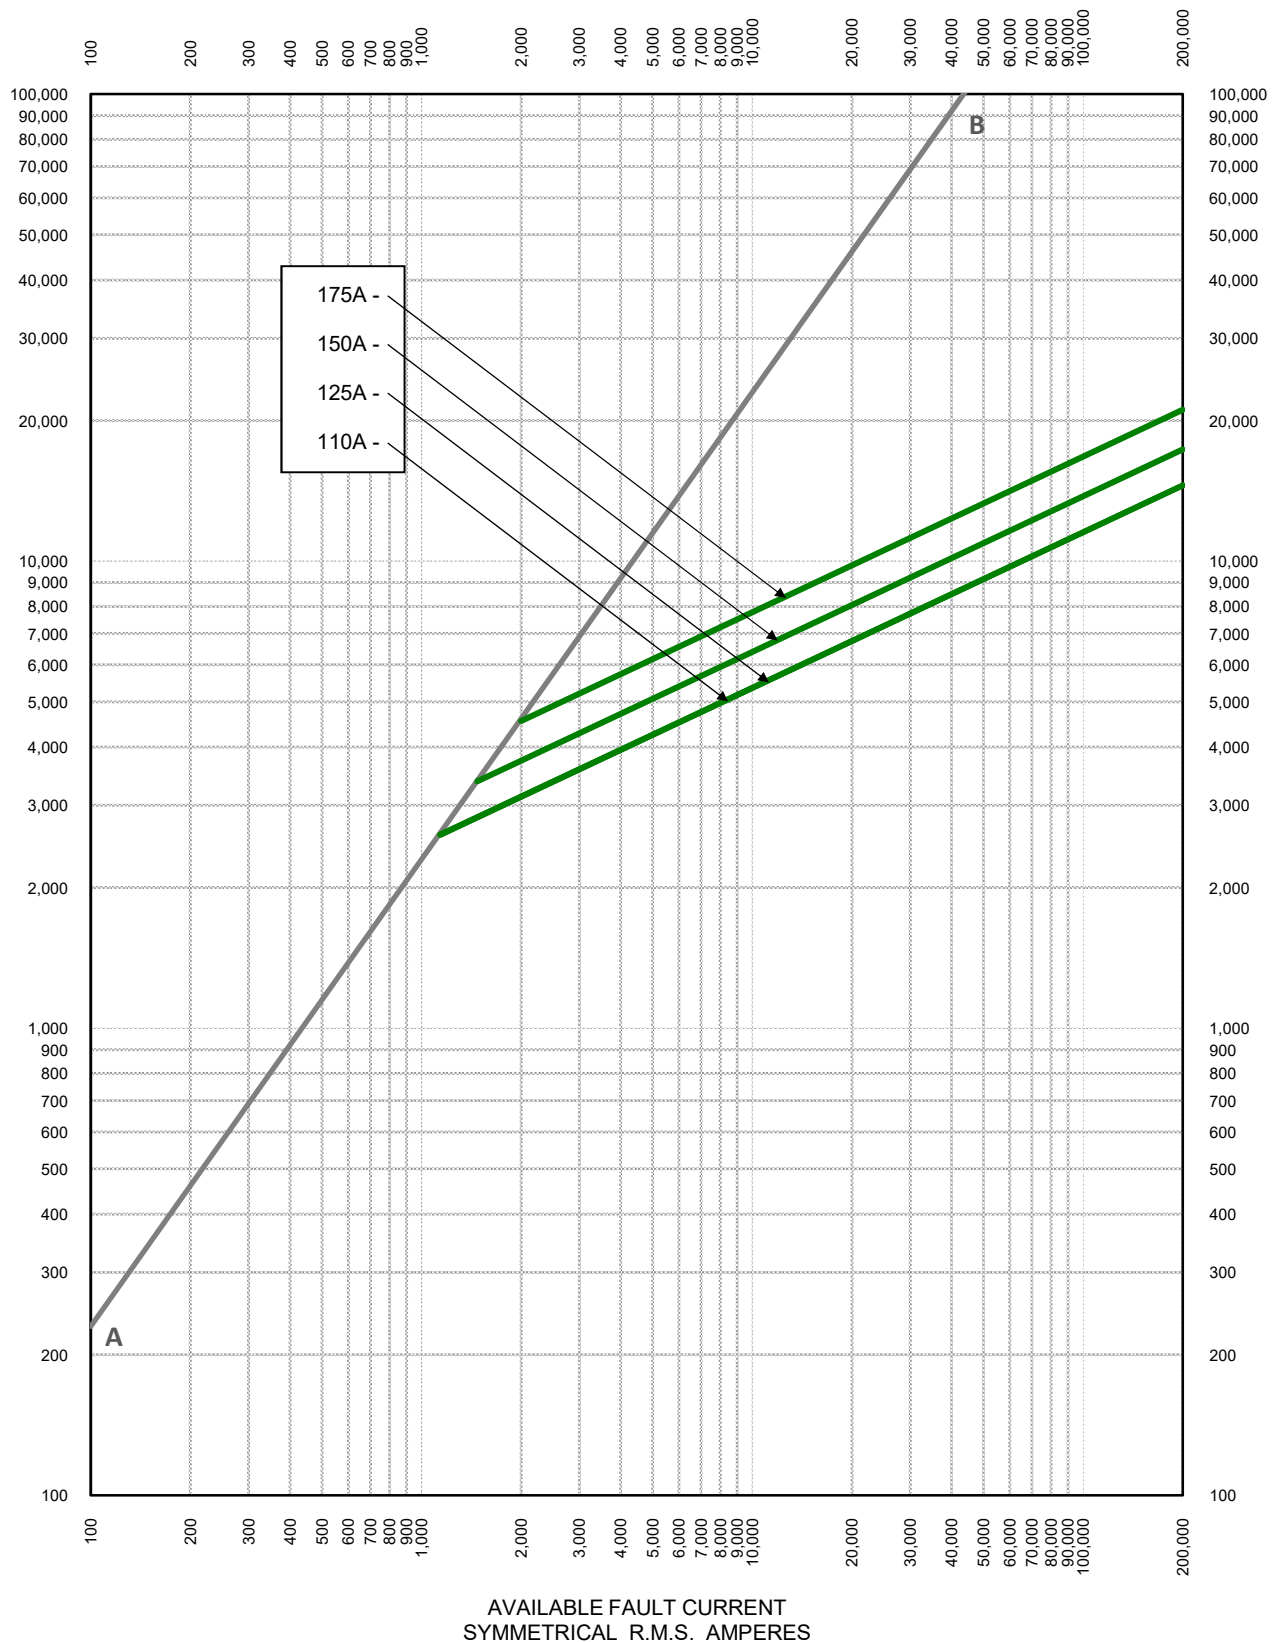

TEST VOLTAGE:		TIME CONSTANT/POWER FACTOR:	FUSE CATALOG NUMBER:
BASIS FOR DATA: AB = 15% Power Factor		JTD & JTDID 30A - 600A	
 LITTELFUSE, INC. CHICAGO, IL. USA		DRAWN BY: LLL	
		DATE: 09/23/2019	
PEAK LET-THRU CHARACTERISTIC CURVES		REVISION: D	
		DRAWING NO.: FCC05-JTD	SHEET 5 OF 6

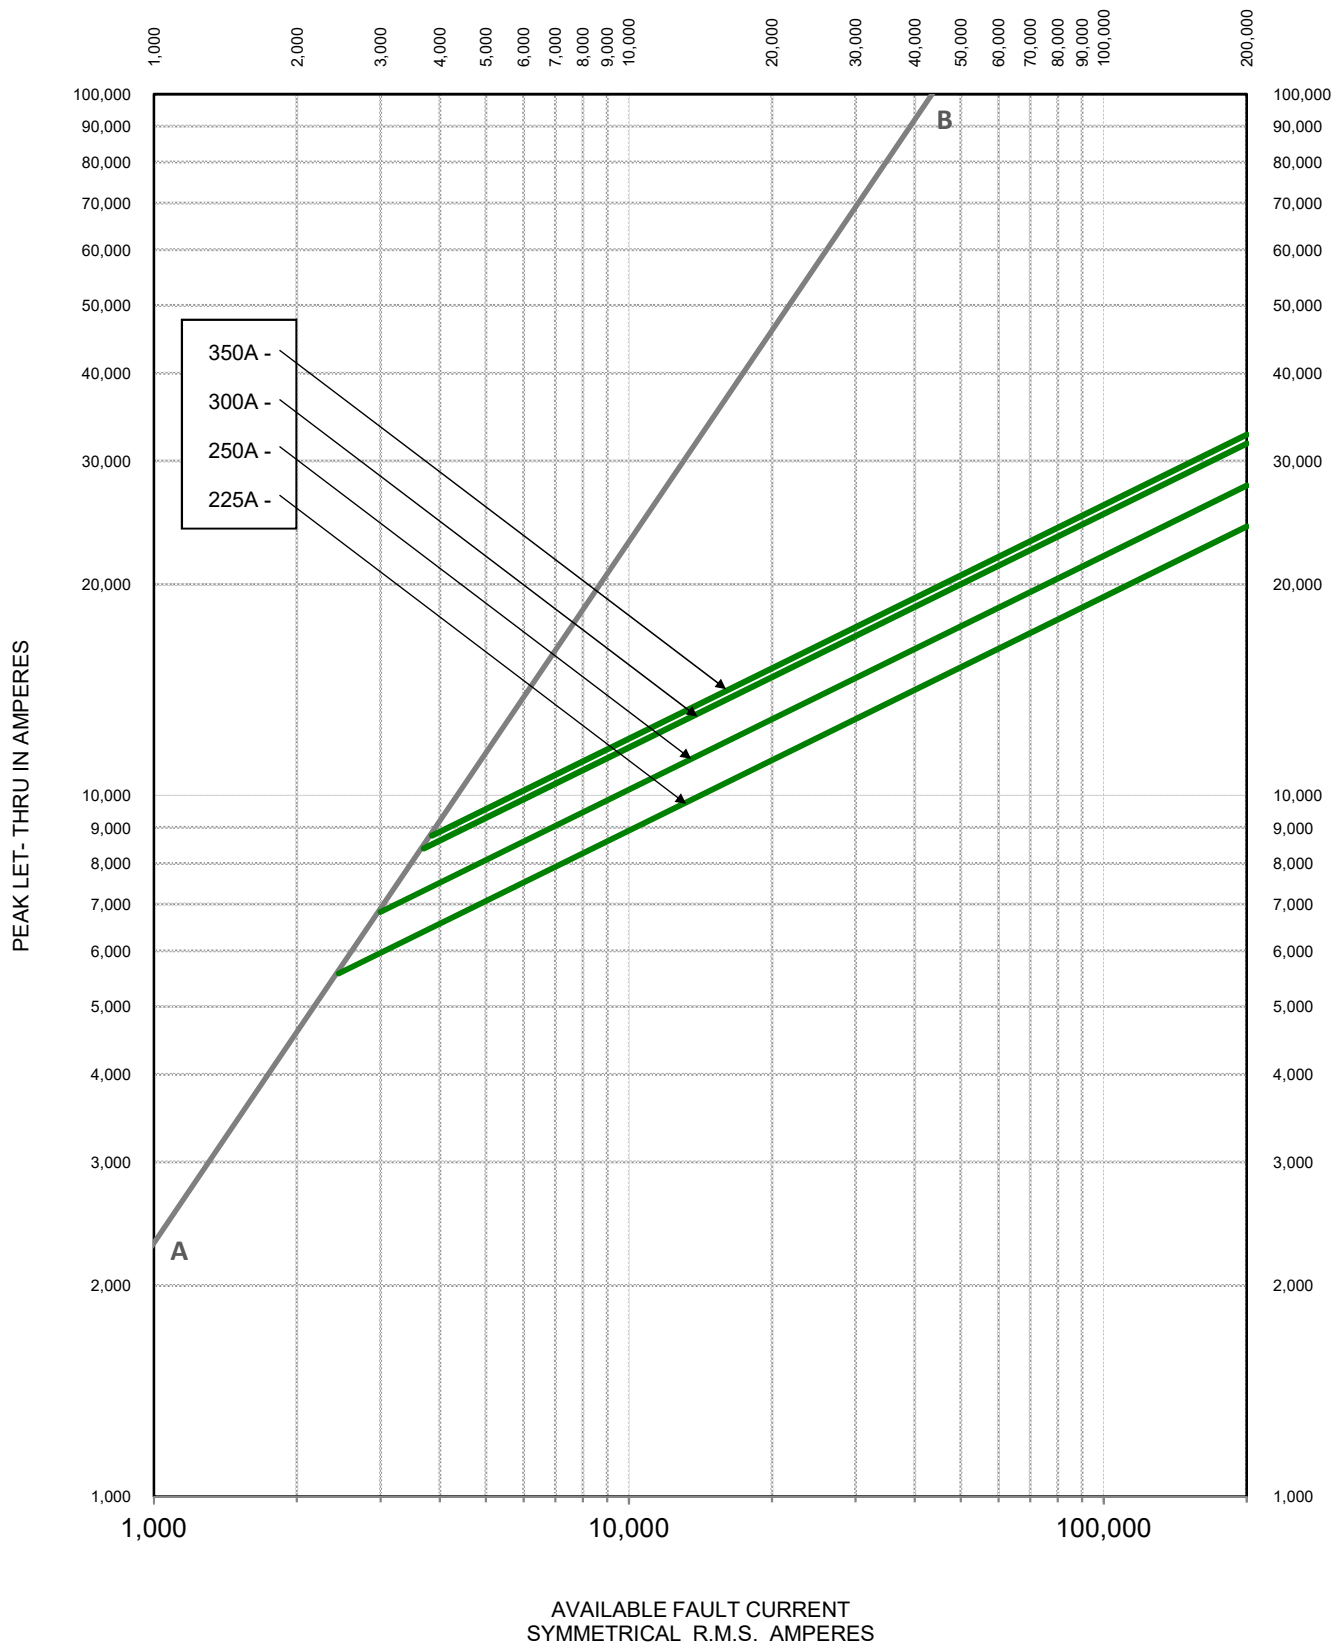

TEST VOLTAGE:	TIME CONSTANT/POWER FACTOR:	FUSE CATALOG NUMBER:
BASIS FOR DATA: AB = 15% Power Factor		JTD & JTDID 30A - 600A
 LITTELFUSE, INC. CHICAGO, IL. USA		DRAWN BY: LLL DATE: 09/23/2019 REVISION: D
PEAK LET-THRU CHARACTERISTIC CURVES		DRAWING NO.: FCC05-JTD SHEET 6 OF 6