

# 10EV+ Series

## High Voltage Fuses – Rated 500 V DC



### Description

10EV Plus fuses comes in four configurations. Each version of the cylindrical high-voltage, low-current fuse employs diffusion pill technology to provide time-delayed protection to circuits in EVs and hybrid passenger vehicles. Ask Littelfuse which configuration best meets your needs.

### Features & Benefits

- Interrupting Rating of 20 kA @ 500 V DC
- Melamine body with UL 94 flammability ratings of V-0
- Interrupting Rating of 20 kA @ 500 V DC / 275 VAC only for 50A
- Mounting Torque M5 of 4.5 ±1 Nm (ISO prescription for ZXISO and ZXPBD versions)
- Operates from -40 °C to +125 °C
- Terminal in tin plated copper alloy/nickel-plated copper alloy
- Voltage Rating of 500 V DC
- End caps in nickel plated brass
- Voltage Rating of 500 V DC / 275 VAC only for 50A
- Refers to ISO 8820-8
- Typical weight of 9.5 g

### Applications

- All EV and Hybrid passenger vehicles

[See Disclaimer Notice](#)

### Additional Information



Resources



Samples

### Ordering Information

Part Number	Termination	Package Size
10EVxxx.ZXPISO	BOLT DOWN (ISO)	320
10EVxxx.ZXPBD	BOLT DOWN (AXIAL)	320
10EVxxx.ZXPCB	PCB MOUNT	350
10EVxxx.ZXPCBL	PCB MOUNT (LONG)	350
10EVxxx.950BLD	PLUG IN	320
10EVxxx.630BLD	PLUG IN	320




### Specifications

<b>Voltage Rating:</b>	500 V DC 500 V DC / 275 VAC (only for 50A)
<b>Interrupting Rating:</b>	20 kA @ 500 V DC 20 kA @ 500 V DC / 275 VAC (only for 50A)
<b>Recommended Environmental Temperature:</b>	-40 °C to +125 °C
<b>Terminals Material:</b>	Tin-plated copper alloy/nickel-plated copper alloy
<b>Housing Material:</b>	Melamine body (UL 94 Flammability rating of V-0)
<b>End caps Material:</b>	Nickel plated brass
<b>Mounting Torque M5:</b>	4.5 ±1 Nm (ISO prescription for ZXPISO and ZXPBD versions)
<b>Typical Weight per Fuse:</b>	9.5 g
<b>Comply With:</b>	ISO 8820-8

# 10EV+ Series

## High Voltage Fuses – Rated 500 V DC

### Ratings

Part Number	Current Rating (A)	Color Coding	Test Cable Size (mm <sup>2</sup> )	Typ. Voltage Drop at 70% IR (mV)	Typ. Cold Resistance (mΩ)	Typ. I <sup>2</sup> t (A <sup>2</sup> s)
10EV030.xxx	30		5	67	2.9	1500
10EV040.xxx	40		5	69	2.1	4450
10EV050.xxx	50		5	69	1.6	7800

Please contact Littelfuse® for more details regarding availability timing.


**Note:** The typical I<sup>2</sup>t is an average value calculated from the breaking capacity tests by using the melting time before the arcing occurs.

### Dimensions


Data from 10EV.

Dimensions in mm. Please refer to the outline drawing for dimensions and tolerances.


ZXPISO Bolt Down (ISO)

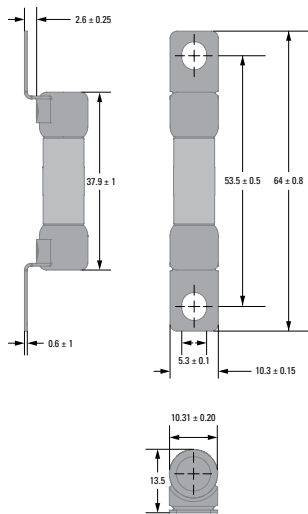


ZXPBD Bolt Down (Axial)

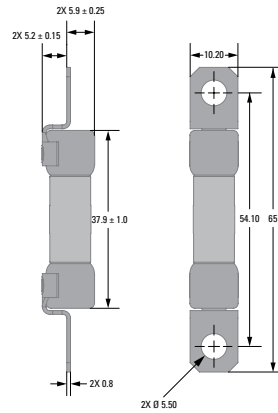


ZXPPCB PCB Mount




ZXPPCBL PCB Mount (Long)



950BLD

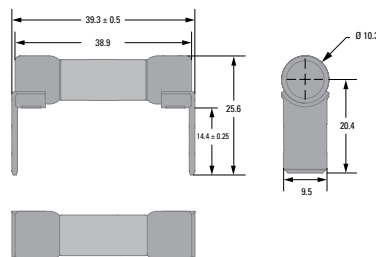


630BLD



# 10EV+ Series

## High Voltage Fuses – Rated 500 V DC

### Time-Current Characteristic

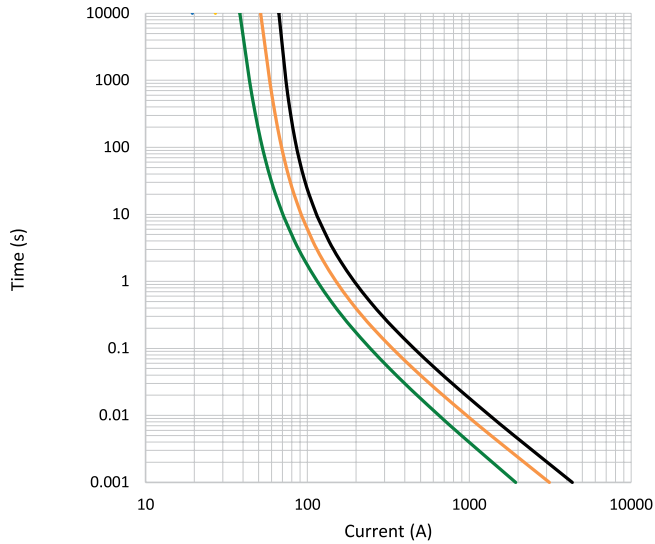

% of Rating	Opening Time Min. / Max. (s)
110	14 400 / -
135	150 / 3600
150	10 / 1000
200	0.5 / 100
300	0.1 / 15
500	0.05 / 1


— 30 A  
— 40 A  
— 50 A

**Note:** Current recommendation may be impacted by the final condition of the application (terminals characteristics, wire size etc.). Please contact Littelfuse® for more information.

### Typical Derating Curves

Temperature security margin is 20%.

Please contact Littelfuse® for Details Regarding Derating Test Set Up.

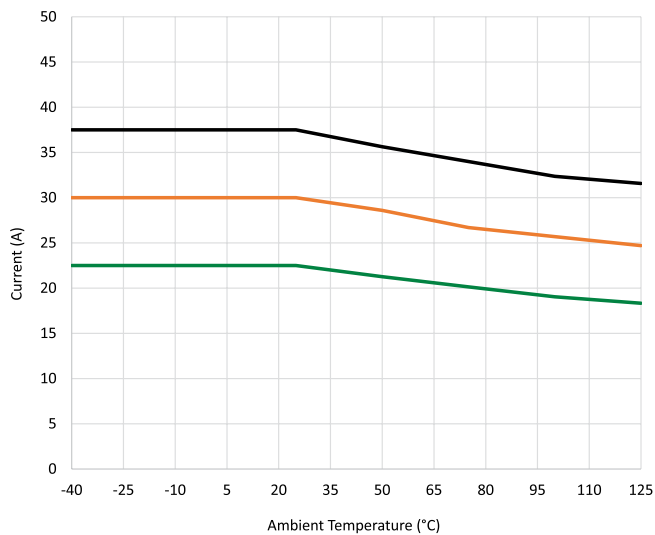

Max. allowed current load (A) at ambient temperature based on typical derating							
	-40 °C	0 °C	20 °C	65 °C	85 °C	110 °C	125 °C
<b>30 A</b>	22.5	22.5	22.5	20.6	20	18.8	18.3
<b>40 A</b>	30	30	30	27	26	25.1	24.7
<b>50 A</b>	37.5	37.5	37.5	34.8	33.4	32	31.6

— 30 A  
— 40 A  
— 50 A

**Note:** Current recommendation may be impacted by the final condition of the application (terminals characteristics, wire size etc.). Please contact Littelfuse® for more information.

**Disclaimer Notice** - Information furnished is believed to be accurate and reliable. However, users should independently evaluate the suitability of and test each product selected for their own applications. Littelfuse products are not designed for, and may not be used in, all applications. Read complete Disclaimer Notice at <https://www.littelfuse.com/legal/disclaimers/product-disclaimer.aspx>