



**PANEL SHOP & CONTROL
SYSTEMS INTEGRATOR**



PRODUCT PORTFOLIO & FEATURES

UL Class Fuses

Littelfuse UL Class fuses offer quality overcurrent protection for all kinds of equipment. Littelfuse fuses are chosen over breakers due to their higher amperage in a smaller package, quicker response time, easy coordination, and no calibration required.

- Available in both indicating and non-indicating versions
- Best-in-class current-limiting performance available in Class RK5
- High interrupting rating (up to 300 kA)
- POWR-PRO® performance, dual-element design



Class CC and Midget Fuses

10 x 38 mm midget and Class CC fuses help provide supplemental overcurrent protection and have the capability to limit currents with fast acting reliability.


- Save 45–75% space
- Fast-acting
- High-interrupting capacity
- Excellent current-limitation



High-Speed Fuses

The POWR-SPEED® line of high-speed (semiconductor) fuses is designed for modern day sensitive power electronics devices that require superior protection against overcurrent.

- Extreme current-limiting protection
- Balanced performance for longevity
- Available in direct bus bar mount flush-end and blade designs to meet the needs of a global market.

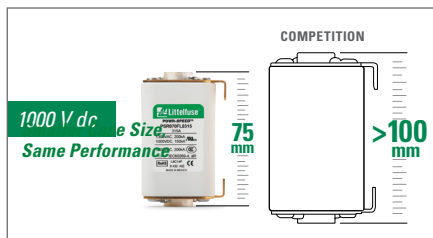

Fuse Blocks and Holders

Enable easy fuse installation and replacement with fuse blocks, fuse holders, and fuse accessories.

- Compact, space-saving design
- Optional DIN-clip covers
- Indication available
- Snap to release—no tools required

Power Distribution Blocks

Specially designed covers provide protection against accidental shorting between poles caused by loose wires, tools, or other conductive material. They also protect personnel from accidentally contacting energized connectors.

- Space-saving designs
- IP20 protection rating



Time Delay Relays

The Littelfuse SSAC line of timers include delay-on-make, delay-on-break, dual function, multifunction, and lockout functions.

- Prevents rapid recycling of compressor
- Provides brownout protection and prevents low-voltage start ups
- Encapsulated to guard against shock, vibration, and humidity
- Replaces thousands of competitive models



Bluetooth Overload Relay

Monitor and control multiple MP8000 relays through the Littelfuse app on your smartphone. No need to open the control panel, which enhances worker safety.

- Stand next to the motor or pump—not the relay—to monitor start up on new installations
- Keep the panel door closed. Control and view relay settings from up to 30 feet away**
- Stores up to 1000 date/time stamped events with trip cause and more
- One model works on all motors 90–690 V ac single or 3-phase (and medium voltages with use of PTs)



Load and Current Sensors

Littelfuse load and current sensors monitor up to 200 A loads.

- Available with fast-on terminals for quick installation
- Over or under current sensing with adjustable trip delays



Alternating Relays

Used to alternate between two loads and are commonly used in duplex pumping applications to balance the runtime of both pumps. The built-in debounce feature prevents the relay from changing state if the switch or float contact bounces momentarily.

- Debounce time delay prevents nuisance actuating caused by waves in the tank
- Duplexing models to handle lag versus lead pump applications
- LED indicators for quick visual load operation reference in duplexing applications



**Bluetooth connectivity range may be reduced depending on the smartphone/tablet used, enclosure type or environmental factors.

Arc-Flash Relays

Installed in new electrical gear, or easily retrofitted into existing switchgear with little or no configuration. Rapidly detect an impending arc flash and send a signal to interrupt power to protect your personnel and equipment.

- Lower the incident energy (IE) and PPE rating of your equipment
- Fast detection in less than 1 ms (select models)
- Flexible sensor configuration for any application



Industrial Shock Block® GFCI

The SB6100 is vital anywhere people, equipment, and water are present. This product is the first ground-fault circuit interrupter (GFCI) to be listed UL943C standard for people protection in three phase applications. It is the only GCFI device on the market that also monitors the continuity of the ground circuit.

- UL943C inverse time trip curve detects and interrupts fault current to protect people and reduce the probability of nuisance tripping
- OEM kit reduces size and cost



Ac Ground-Fault Relays

Sensitive ground-fault relays featuring advanced filtering will quickly and reliably detect the breakdown of insulation resistance caused by moisture, vibration, chemicals or dust.

- Microprocessor-based solutions with advanced digital harmonic filtering to prevent nuisance trips
- Non-volatile trip memory retains trip state when de-energized to simplify troubleshooting
- DIN-rail mount and small footprint



Ac-Dc Ground-Fault Relays

Complete and sensitive protection of VFDs to catch high-resistance ground faults before they escalate; detects faults from dc to 6000 Hz.

- Many VFDs do not have sensitive built-in ground-fault protection and are not compatible with High-Resistance Grounding (HRG)
- Metering capabilities
- Password-protected alarm and trip settings and optional network communications



Intrinsically-Safe Relays

Single or multi-channel, intrinsically-safe switch for interfacing between hazardous and non-hazardous areas. Designed to handle multiple uses including pump-up/pump-down controller or switch.

- Finger-safe terminals meet IEC 61000 safety requirements
- Isolated output relay allows connection to programmable logic controller (PLC) or control voltage



Class J Fuse Disconnect Switches

The Class J fuse disconnect switch combines a switch and multiple fuses in a single, compact device. It offers a simpler way to manually open and close a circuit while safeguarding against overcurrent and short circuits. When it detects an overload or short circuit, the fuse blows automatically to open or break the circuit and shuts off the equipment.

- Fuse isolation makes it easy to segregate a particular fuse on the circuit for safe repair or maintenance
- Double break contact system breaks circuit upstream and downstream enabling the switch to handle higher voltages and provide a longer switch life
- Small footprint saves space and provides design flexibility



Voltage and Phase Monitors

Prevent motors from running with no load applied and provide protection due to blown fuses, broken wires, or worn contacts. The monitors help to prevent damaged machinery and injury of personnel.

- Protects against phase loss and reverse phase
- Low- and high-voltage trip



Neutral Grounding Resistor/HRG Monitoring

Provides continuous monitoring of the neutral-to-ground path to verify that the neutral grounding resistor (NGR) is intact and that it has not been bypassed or shorted.

- Open NGR renders current sensing ground-fault protection inoperative and could result in a false belief that the system is functioning properly
- A shorted NGR results in higher-than-expected ground-fault current



Pump Controller

This 5-channel pump controller handles multiple pump applications and can act as a 5-channel switch. Supports industry standards for pump-up and pump-down configurations and can indicate low, high, and out of sequence alarms. Can also be used as alternating and non-alternating pump control for jockey or emergency pumps.

- Duplex, triplex, or quadplex pump control
- Variable time delay/lag pump delay from 2–255 seconds
- Intrinsically-safe version available



Motor Protection

From basic to advanced, from standard to smart, we have the level of protection that's right for you. Use this checklist to easily select the degree of motor protection that you need for your application.

SMART

This smart, universal relay can communicate directly with your smartphone or tablet via Bluetooth. No need to open the control panel. Monitor and control unlimited relays through the Littelfuse MP8000 app on your smartphone or tablet from a safe distance.



MP8000 Bluetooth Overload Relay

ADVANCED

Offering an advanced level of protection, multi-functional relays with on-board display, customizable trip curves, and optional communications provide protection for low- and medium-voltage motors.



MotorSaver® 777-P2
Current/Voltage
Monitor



MPU-32
Motor Protection

STANDARD

In addition to voltage and phase protection, a standard level of protection allows you to monitor the load side and log events of low voltage motors. Plus, you can view conditions on an optional hand-held display in real time for easy troubleshooting.



455 Voltage Monitor Relay



Informer-MS

BASIC

With a basic level of protection, you can monitor the voltage going into a low voltage motor and detect faulty conditions that cause premature motor failure and unplanned downtime.



460 Monitor




201A-AU
Monitor



PGR-6100 Ground-Fault
& Insulation Relay



LOCAL RESOURCES FOR A **GLOBAL** MARKET

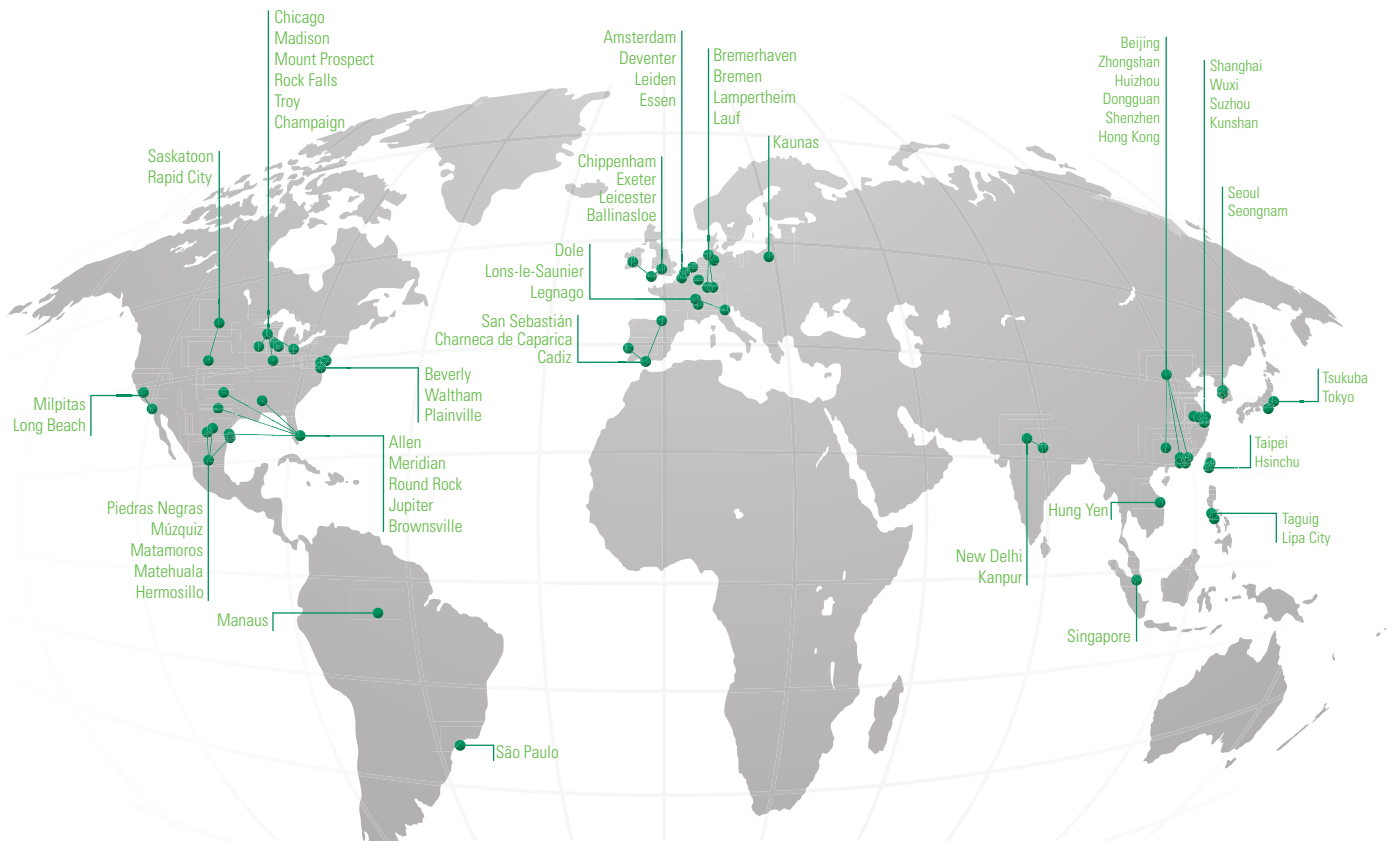

Littelfuse.com/Industrial

For a comprehensive library of resources including datasheets, product manuals, white papers, application guides, demos, online design tools, catalogs, and more, visit Littelfuse.com/TechnicalResources

North America

Littelfuse World Headquarters
8755 West Higgins Road, Suite 500
Chicago, IL 60631, USA

Littelfuse SymCom
1241 Concourse Drive
Rapid City, SD 57703, USA

Littelfuse Startco
140 – 15 Innovation Boulevard
(The Galleria Building)
Saskatoon, SK S7N 2X8, Canada
Tel: +1-306-373-5505

Littelfuse Hartland Controls
807 Antec Road
Rock Falls, IL 61071, USA
Tel: +1-815-626-5170

Fuse and Relay

Technical Support:
Tel: +1-800-TEC-FUSE
Tel: +1-800-832-3873
Fuses: techline@littelfuse.com
Relays: relays@littelfuse.com

Customer Service:
Tel: +1-800-227-0029
E-mail: PG_CSG@littelfuse.com

Asia

Littelfuse
Unit 1604B Desay Building,
Gaoxin Nanyi Ave.
Hi-Tech Industrial Park
Nashan District
Shenzhen, 518057, China
+86 755 8207 0760

Europe

Littelfuse
Julius-Bamberger-Str. 8a
Bremen, D-28279, Germany
+49 421 82 87 3 147

**Western Automation
now part of Littelfuse**
2 Atrius Place, Poolboy,
Ballinalsee, Co. Galway,
H53 TD 78, Ireland
Tel: +353 (0) 90 9643359



Littelfuse products are certified to many standards around the world. To check certifications on specific components, please refer to the specific product datasheet on Littelfuse.com.



Disclaimer Notice – Information furnished is believed to be accurate and reliable. However, users should independently evaluate the suitability of and test each product selected for their own applications. Littelfuse products are not designed for, and may not be used in, all applications. Read complete Disclaimer Notice at www.littelfuse.com/product-disclaimer.