


QVxx35xHx Series


35 A High Temperature Alternistor TRIACs

HF RoHS

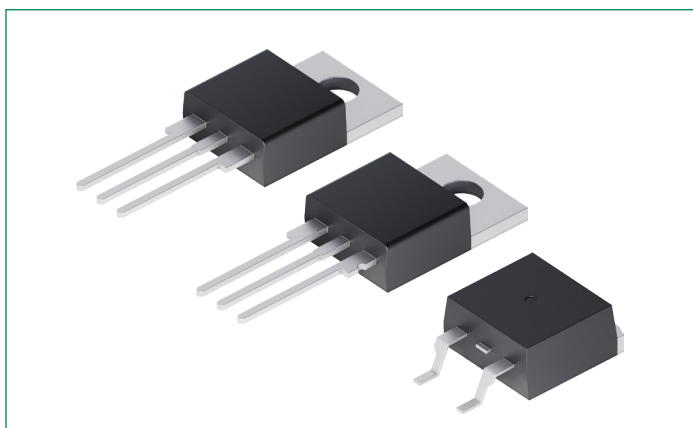


Pinout Diagram



TO-220 (L-Package)

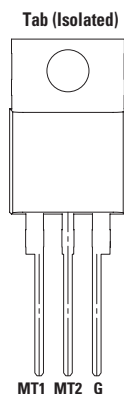

TO-220 (R-Package)

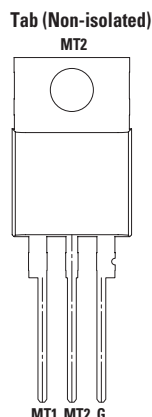

TO-263

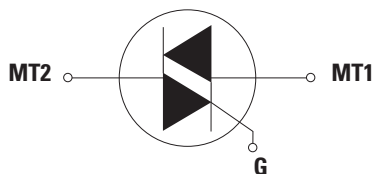

MT1: Main Terminal 1; **MT2:** Main Terminal 2; **G:** Gate

Description

This 35 A high temperature Alternistor TRIAC, offered in TO-220AB, TO-220 isolated, and TO-263 packages, has 150 °C maximum junction temperature (T_{vj}) and 400 A I_{TSM} (60 Hz).

This series enables easier thermal management and higher surge handling capability in AC power control applications such as heater control, motor speed control, lighting controls, and static switching relays.

This QV series TRIAC operates in quadrants I, II, and III, and offers high performance in applications requiring high commutation capability without a snubber circuit.

Features

- Voltage capability of 800 V
- Surge capability of 400 A at 60 Hz half cycle
- Mechanically and thermally robust TO-220 clip-attach assembly
- High dv/dt up to 1000 V/ μ s for improved noise immunity
- 3Q technology for high commutation capability
- Internally-isolated TO-220 package
- Maximum T_{vj} of 150 °C
- Halogen-free and RoHS-compliant

Applications

TRIAC is an excellent AC switch in applications such as heating, lighting, and motor speed controls.

Typical applications are:

- Heater control such as coffee brewer, tankless water heater, and infrared heater
- AC solid-state relays
- Light dimmers including incandescent and LED lighting
- Motor speed control in kitchen appliances, power tools, home/brown/white goods and light industrial applications such as compressor motor control

Alternistor TRIAC is used with high inductive loads requiring high commutation capability. Internally isolated packages offer better heat sinking with higher isolation voltage.

Product Summary

Characteristic	Value	Unit
$I_{T(RMS)}$	35	A
V_{DRM}/V_{RRM}	600 or 800	V
$I_{GT(Q1)}$	35	mA

Maximum Ratings - Alternistor TRIAC (3 Quadrants)

Symbol	Characteristics	Conditions			Value	Units
I _{T(RMS)}	On-state RMS Current	QVxx35LHy	T _c = 110 °C	full sine wave	35	A
		QVxx35RHy / QVxx35NHy	T _c = 115 °C			
I _{TSM}	Non-repetitive Surge Peak On-state Current	f = 50 Hz, t = 20 ms	T _{vj} initial = 25 °C, single half-cycle		330	A
		f = 60 Hz, t = 16.7 ms			400	
I ² t	I ² t Value for Fusing	t _p = 8.3 ms			664	A ² s
di/dt	Critical Rate of Rise of On-state Current	f = 120 Hz, T _{vj} = 150 °C			100	A/μs
I _{GTM}	Peak Gate Trigger Current	t _p ≤ 10 μs, I _{GT} ≤ I _{GTM} , T _{vj} = 150 °C			4	A
P _{G(AV)}	Average Gate Power Dissipation	T _{vj} = 150 °C			1	W
T _{stg}	Storage Temperature Range	–			–40 to 150	°C
T _{vj}	Operating Junction Temperature Range	–			–40 to 150	°C
V _{DSM} / V _{RSM}	Non-repetitive Surge Peak Off-state Voltage	V _{DSM} /V _{RSM} = 600 V	pulse width = 100 μs		700	V
		V _{DSM} /V _{RSM} = 800 V			1000	

xx = voltage/10; γ = sensitivity**Electrical Characteristics** ($T_{vj} = 25\text{ }^{\circ}\text{C}$, unless otherwise specified) — **Alternistor TRIAC** (3 Quadrants)

Symbol	Characteristics	Conditions		QVxx35xH4			Units
				Min.	Typ.	Max.	
I _{GT}	DC Gate Trigger Current	V _D = 12 V, R _L = 60 Ω	I – II – II	5	–	35	mA
V _{GT}	DC Gate Trigger Voltage		I – II – II	0.4	–	1.3	V
V _{GD}	Gate Non-trigger Voltage	V _D = V _{DRM} , R _L = 3.3 kΩ, T _{vj} = 150 °C	I – II – II	0.15	–	–	V
I _H	Holding Current	I _T = 400 mA		–	–	60	mA
dv/dt	Critical Rate-of-rise of Off-stage Voltage	V _D = 2/3 V _{DRM} , Gate Open, T _{vj} = 150 °C	600 V	1000	–	–	V/μs
			800 V	1500	–	–	
(dv/dt)c	Critical Rate-of-rise of Commutation Voltage	(di/dt)c = 18.6 A/ms, T _{vj} = 150 °C		25	–	–	V/μs
t _{gt}	Turn-on Time	I _G = 2 x I _{GT} , P _W = 15 μs, I _T = 49.5 A _{pk}	I	–	3	–	μs
			II	–	5	–	
			III	–	13	–	

Thermal Characteristics


Symbol	Characteristics		Value	Units
R _{th(j-c)}	Thermal Resistance, Junction to Case (AC)	QVxx35RHγ/ QVxx35NHγ	0.8	K/W
		QVxx35LHγ	0.95	

Static Characteristics

Symbol	Characteristics	Conditions	Max. Value	Units
V_{TM}	Peak On-state Voltage	$I_T = 49.5\text{ A}$ $t_p = 380\text{ }\mu\text{s}$	1.6	V
I_{DRM}/I_{RRM}	Off-state Current, Peak Repetitive	$V_D = V_{DRM}/V_{RRM}$, $T_{vj} = 25\text{ }^{\circ}\text{C}$	5	μ A
		$V_D = V_{DRM}/V_{RRM}$, $T_{vj} = 150\text{ }^{\circ}\text{C}$	4	mA
V_{T0}	Threshold Voltage	$T_{vj} = 150\text{ }^{\circ}\text{C}$	0.95	V
R_D	Slope Resistance	$T_{vj} = 150\text{ }^{\circ}\text{C}$	11	m Ω

Characteristic Curves

Figure 1. Definition of Quadrants

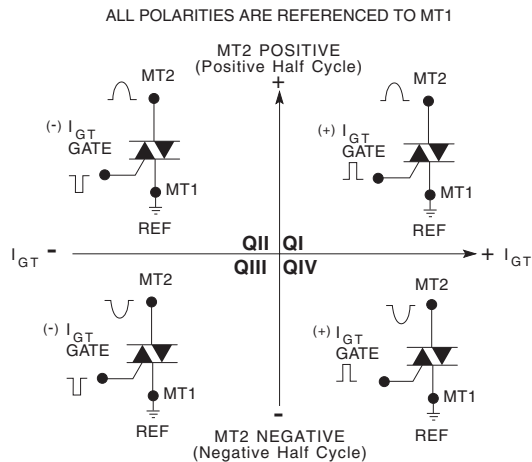

Note: Alternistors will not operate in QIV

Fig. 2. Normalized DC Gate Trigger Current for all Quadrants vs. Junction Temperature

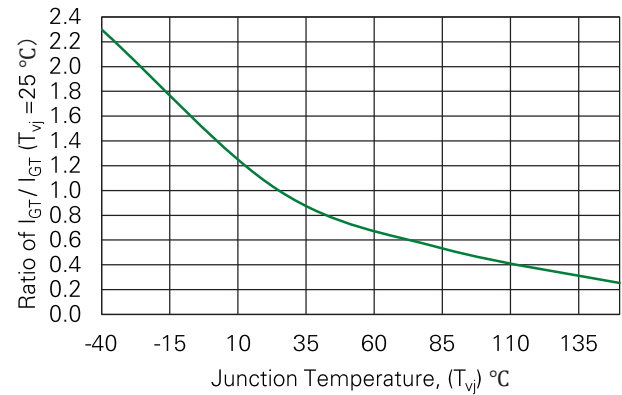


Fig. 3. Normalized DC Holding Current vs. Junction Temperature

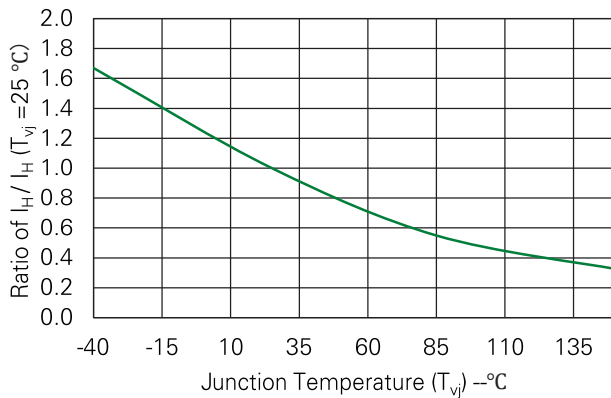


Fig. 4. Normalized DC Gate Trigger Voltage for all Quadrants vs. Junction Temperature

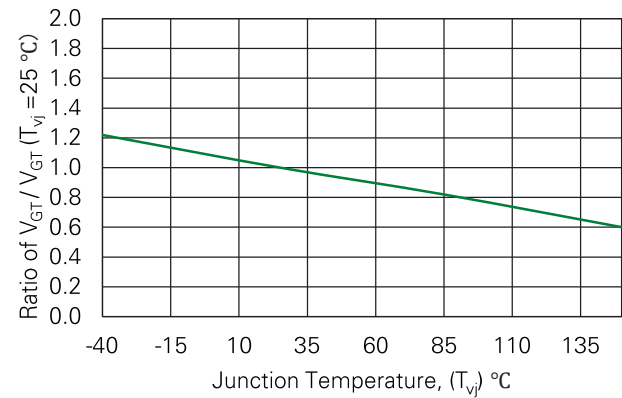


Fig. 5. Typical Power Dissipation vs. RMS On-state Current

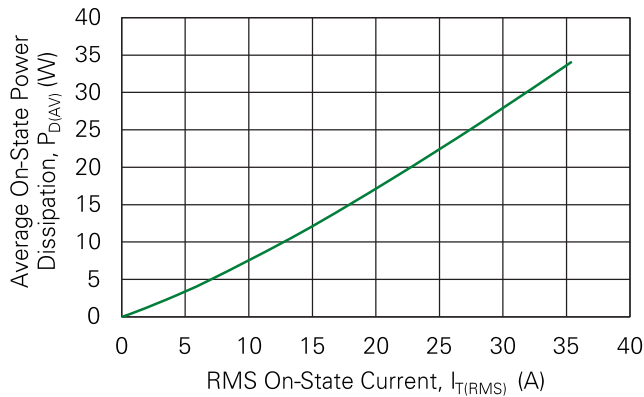


Fig. 6. Typical On-state Current vs. On-state Voltage

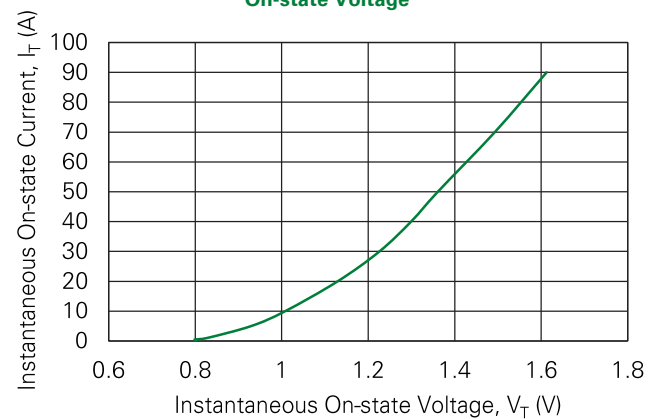
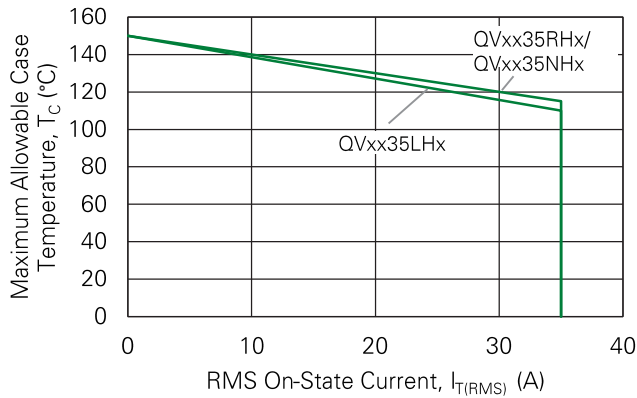
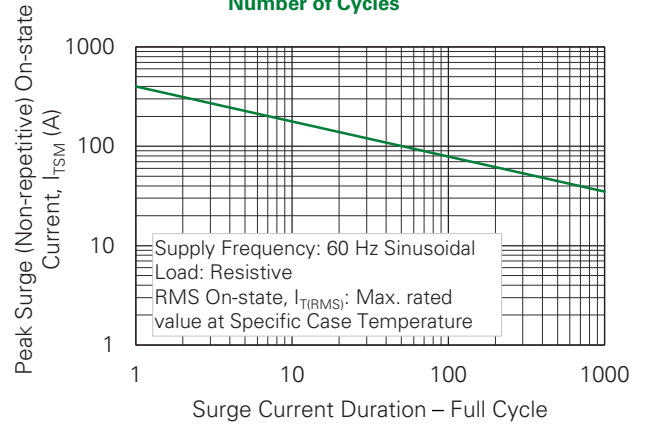
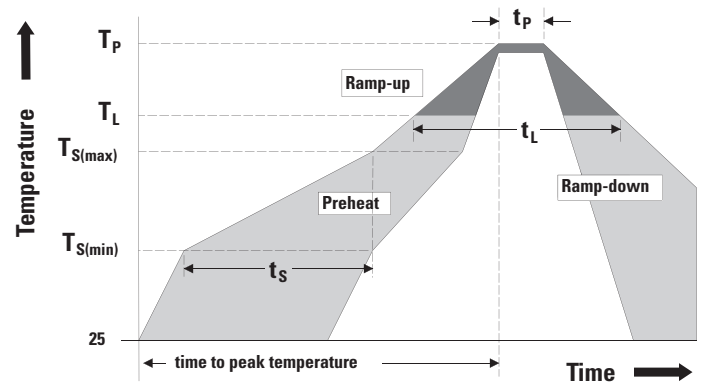


Fig. 7. Maximum Allowable Case Temperature vs. RMS On-state Current**Fig. 8. Surge Peak On-state Current vs. Number of Cycles****Notes:**

- Gate control may be lost during and immediately following surge current interval.
- Overload may not be repeated until junction temperature has returned to steady-state rated value.

Soldering Parameters

Characteristic		Value
Reflow Condition		Pb – Free assembly
Pre-heat	Temperature Min ($T_{s(min)}$)	150 °C
	Temperature Max ($T_{s(max)}$)	200 °C
	Time (min to max) (t_s)	60 – 180 secs
Average ramp up rate (Liquidus Temp)(T_L) to peak		5 °C/second max
$T_{s(max)}$ to T_L - Ramp-up Rate		5 °C/second max
Reflow	Temperature (T_L) (Liquidus)	217 °C
	Time (t_L)	60 – 150 seconds
Peak Temperature (T_p)		260 ^{+0/-5} °C
Time within 5 °C of actual peak Temperature (t_p)		20 – 40 seconds
Ramp-down Rate		5 °C/second max
Time 25 °C to peak Temperature (T_p)		8 minutes max
Do Not Exceed		260 °C

**Environmental Specifications**

Test	Specifications and Conditions
AC Blocking	MIL-STD-750, M-1040, Cond A Applied Peak AC voltage @ 150 °C for 1008 hours
IOL	MIL-STD-750 Method 1037
Lead Bend	MIL-STD-750, M-2036 Cond E
Moisture Sensitivity Level	Level 1, JEDEC-J-STD-020
Resistance to Solder Heat	MIL-STD-750: Method 2031
Solderability	ANSI/J-STD-002: category 3, Test A
Temperature Cycling	MIL-STD-750, M-1051, 1000 cycles; -55 °C to +150 °C; 15-minute dwell-time
Temperature/Humidity	EIA / JEDEC, JESD22-A101, 1008 hours; 160 V - DC: 85 °C; 85% relative humidity
UHAFT	JESD22A-118, 96 hrs, 130 °C/ 85% relative humidity

Physical Specifications

Characteristic	Value
Terminal Finish	100% Matte Tin-plated
Body Material	UL Recognized compound meeting flammability rating 94 V-0
Terminal Material	Copper Alloy


Product Selector

Part Number	Voltage		Gate Sensitivity Quadrants	Type	Package
	600 V	800 V	I-II-III		
QVxx35LH4	X	X	35 mA	Alternistor TRIAC	TO-220AB (L package)
QVxx35RH4	X	X	35 mA	Alternistor TRIAC	TO-220AB (R package)
QVxx35NH4	X	X	35 mA	Alternistor TRIAC	TO-263 (D ² PAK)


Packing Options

Part Number	Marking	Weight	Packing Mode	Base Quantity
QVxx35LHy	QVxx35LHy	2.2 g	Tube Pack	1000
QVxx35RHy	QVxx35RHy	2.2 g	Tube Pack	1000
QVxx35NHyrP	QVxx35NHyrP	1.6 g	Embossed Carrier	500

Part Numbering and Marking

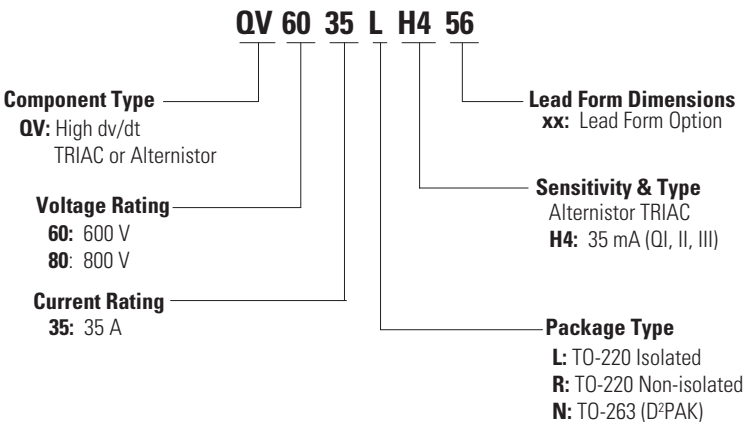


TO-220 AB - (L and R Package)
TO-263 AB - (N Package)




Date Code Marking
Y: Year Code
M: Month Code
XXX: Lot Trace Code

Package Dimensions TO-220AB (L Package) – Isolated Mounting Tab

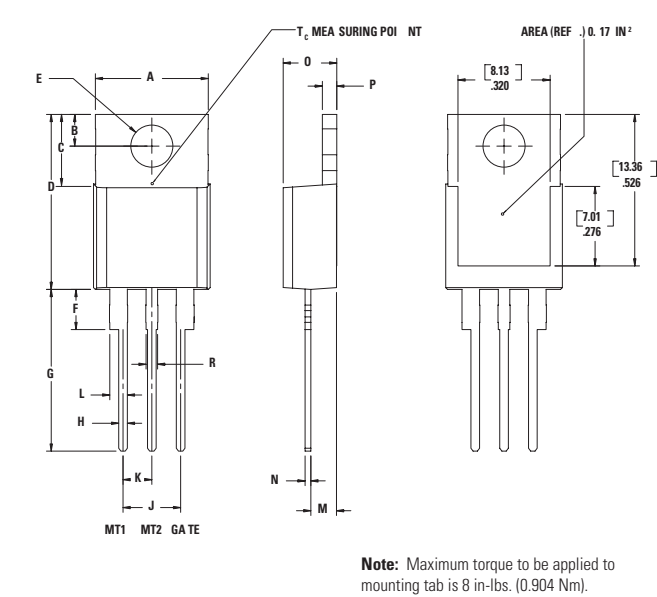


Symbol	Millimeters		Inches	
	Min.	Max.	Min.	Max
A	9.65	10.67	0.380	0.420
B	2.67	2.92	0.105	0.115
C	5.84	6.35	0.230	0.250
D	14.99	15.75	0.590	0.620
E	3.61	3.73	0.142	0.147
F	2.79	3.30	0.110	0.130
G	13.72	14.60	0.540	0.575
H	0.64	0.89	0.025	0.035
J	4.95	5.21	0.195	0.205
K	2.41	2.67	0.095	0.105
L	1.52	1.91	0.060	0.075
M	2.16	2.41	0.085	0.095
N	0.46	0.61	0.018	0.024
O	4.52	4.78	0.178	0.188
P	1.14	1.52	0.045	0.060
R	0.97	1.22	0.038	0.048

Package Dimensions TO-220AB (R Package) – Non-isolated Mounting Tab Common with Center Lead

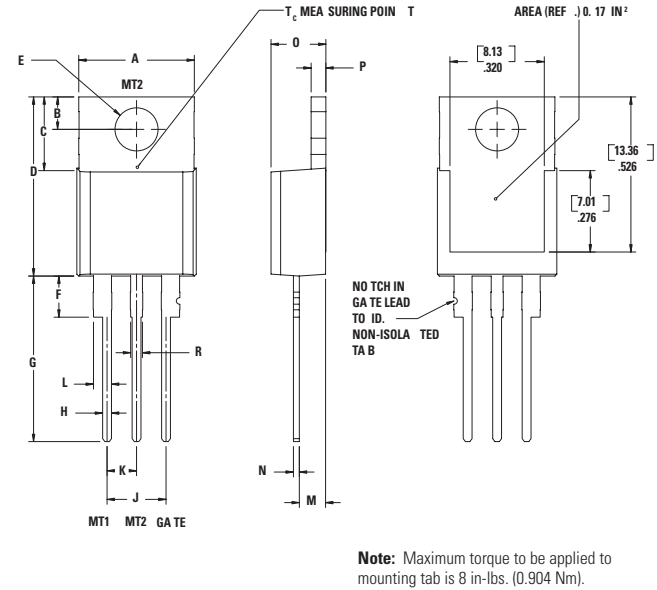


Symbol	Millimeters		Inches	
	Min.	Max.	Min.	Max
A	9.65	10.67	0.380	0.420
B	2.67	2.92	0.105	0.115
C	5.84	6.35	0.230	0.250
D	14.99	15.75	0.590	0.620
E	3.61	3.73	0.142	0.147
F	2.79	3.30	0.110	0.130
G	13.72	14.60	0.540	0.575
H	0.64	0.89	0.025	0.035
J	4.95	5.21	0.195	0.205
K	2.41	2.67	0.095	0.105
L	1.52	1.91	0.060	0.075
M	2.16	2.41	0.085	0.095
N	0.46	0.61	0.018	0.024
O	4.52	4.78	0.178	0.188
P	1.14	1.52	0.045	0.060
R	0.97	1.22	0.038	0.048

Package Dimensions TO-263 (N Package) – D²PAK Surface Mount

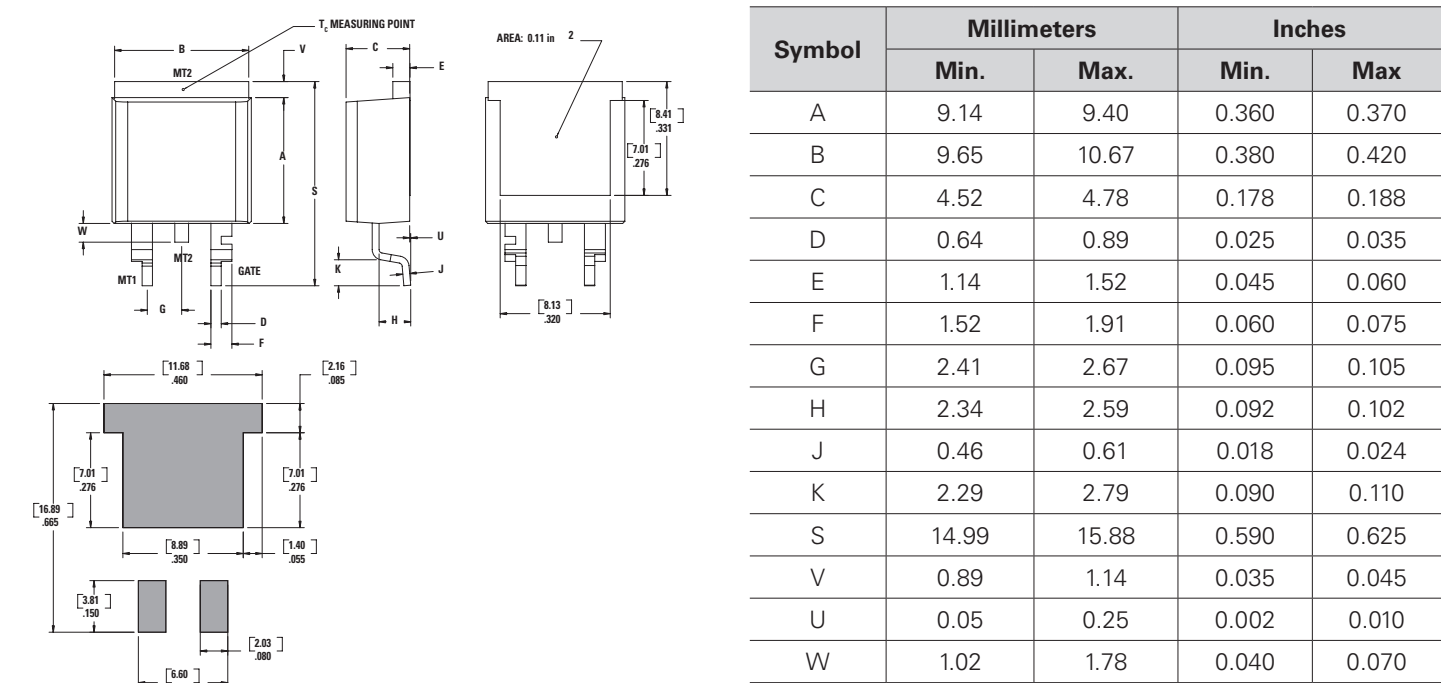

Reel Pack (RP) Specifications for TO-263 Embossed Carrier

Meets all EIA-481-2 Standards

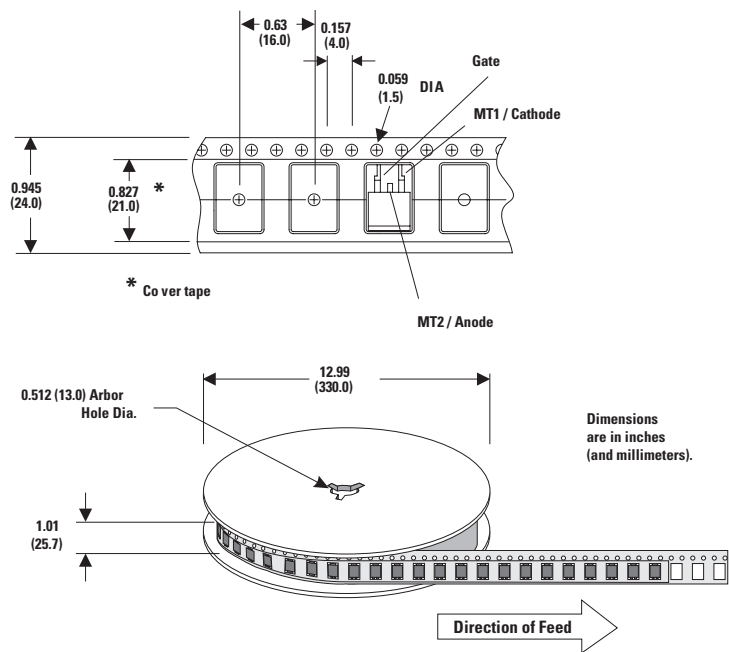

Disclaimer Notice
Information furnished is believed to be accurate and reliable. However, users should independently evaluate the suitability of and test each product selected for their own applications. Littelfuse products are not designed for, and may not be used in, all applications.
Read complete Disclaimer Notice at <http://www.littelfuse.com/disclaimer-electronics>.