

High Efficiency Thyristor


V_{RRM} = 1200 V
 I_{TAV} = 30 A
 V_T = 1.27 V

Single Anode Gated Thyristor


Part number

CLB30I1200PZ

Marking on Product: *CLB30I1200PZ*

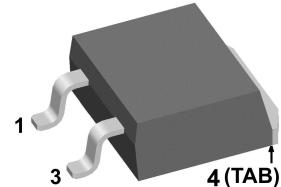

Backside: cathode



Features / Advantages:

- Thyristor for line frequency
- Planar passivated chip
- Long-term stability
- Thyristor can be used as Triac
 - anti-parallel combination with CGT
 - Cathode-Gated-Thyristor covers quadrants I & II
 - CGT-counterpart: CLA30E1200NPZ

Applications:

- Line rectifying 50/60 Hz
- Softstart AC motor control
- DC Motor control
- Power converter
- AC power control
- Lighting and temperature control

Package: TO-263 (D2Pak-HV)

- Industry standard outline
- RoHS compliant
- Epoxy meets UL 94V-0

Disclaimer Notice


Information furnished is believed to be accurate and reliable. However, users should independently evaluate the suitability of and test each product selected for their own applications. Littelfuse products are not designed for, and may not be used in, all applications. Read complete Disclaimer Notice at www.littelfuse.com/disclaimer-electronics.

Thyristor

Symbol	Definition	Conditions	Ratings			
			min.	typ.	max.	
$V_{RSM/DSM}$	max. non-repetitive reverse/forward blocking voltage	$T_{VJ} = 25^\circ\text{C}$			1300	V
$V_{RRM/DRM}$	max. repetitive reverse/forward blocking voltage	$T_{VJ} = 25^\circ\text{C}$			1200	V
$I_{R/D}$	reverse current, drain current	$V_{R/D} = 1200 \text{ V}$ $V_{R/D} = 1200 \text{ V}$	$T_{VJ} = 25^\circ\text{C}$ $T_{VJ} = 125^\circ\text{C}$		10 2	μA mA
V_T	forward voltage drop	$I_T = 30 \text{ A}$	$T_{VJ} = 25^\circ\text{C}$		1.30	V
		$I_T = 60 \text{ A}$			1.59	V
		$I_T = 30 \text{ A}$	$T_{VJ} = 125^\circ\text{C}$		1.27	V
		$I_T = 60 \text{ A}$			1.65	V
I_{TAV}	average forward current	$T_C = 115^\circ\text{C}$	$T_{VJ} = 150^\circ\text{C}$		30	A
$I_{T(RMS)}$	RMS forward current	180° sine			47	A
V_{T0}	threshold voltage	$\left. \begin{array}{l} \text{slope resistance} \\ \end{array} \right\} \text{for power loss calculation only}$	$T_{VJ} = 150^\circ\text{C}$		0.86	V
r_T	slope resistance				13.2	$\text{m}\Omega$
R_{thJC}	thermal resistance junction to case				0.5	K/W
R_{thCH}	thermal resistance case to heatsink			0.25		K/W
P_{tot}	total power dissipation		$T_C = 25^\circ\text{C}$		250	W
I_{TSM}	max. forward surge current	$t = 10 \text{ ms}; (50 \text{ Hz}), \text{sine}$	$T_{VJ} = 45^\circ\text{C}$		300	A
		$t = 8,3 \text{ ms}; (60 \text{ Hz}), \text{sine}$	$V_R = 0 \text{ V}$		325	A
		$t = 10 \text{ ms}; (50 \text{ Hz}), \text{sine}$	$T_{VJ} = 150^\circ\text{C}$		255	A
		$t = 8,3 \text{ ms}; (60 \text{ Hz}), \text{sine}$	$V_R = 0 \text{ V}$		275	A
I^2t	value for fusing	$t = 10 \text{ ms}; (50 \text{ Hz}), \text{sine}$	$T_{VJ} = 45^\circ\text{C}$		450	A^2s
		$t = 8,3 \text{ ms}; (60 \text{ Hz}), \text{sine}$	$V_R = 0 \text{ V}$		440	A^2s
		$t = 10 \text{ ms}; (50 \text{ Hz}), \text{sine}$	$T_{VJ} = 150^\circ\text{C}$		325	A^2s
		$t = 8,3 \text{ ms}; (60 \text{ Hz}), \text{sine}$	$V_R = 0 \text{ V}$		315	A^2s
C_J	junction capacitance	$V_R = 400 \text{ V}$ $f = 1 \text{ MHz}$	$T_{VJ} = 25^\circ\text{C}$	13		pF
P_{GM}	max. gate power dissipation	$t_p = 30 \mu\text{s}$	$T_C = 150^\circ\text{C}$		10	W
		$t_p = 300 \mu\text{s}$			5	W
P_{GAV}	average gate power dissipation				0.5	W
$(di/dt)_{cr}$	critical rate of rise of current	$T_{VJ} = 150^\circ\text{C}; f = 50 \text{ Hz}$ repetitive, $I_T = 90 \text{ A}$			150	$\text{A}/\mu\text{s}$
		$t_p = 200 \mu\text{s}; di_G/dt = 0.3 \text{ A}/\mu\text{s};$				
		$I_G = 0.3 \text{ A}; V = \frac{2}{3} V_{DRM}$ non-repet., $I_T = 30 \text{ A}$			500	$\text{A}/\mu\text{s}$
$(dv/dt)_{cr}$	critical rate of rise of voltage	$V = \frac{2}{3} V_{DRM}$	$T_{VJ} = 150^\circ\text{C}$		500	$\text{V}/\mu\text{s}$
		$R_{GK} = \infty$; method 1 (linear voltage rise)				
V_{GT}	gate trigger voltage	$V_D = 6 \text{ V}$	$T_{VJ} = 25^\circ\text{C}$		1.3	V
			$T_{VJ} = -40^\circ\text{C}$		1.6	V
I_{GT}	gate trigger current	$V_D = 6 \text{ V}$	$T_{VJ} = 25^\circ\text{C}$		30	mA
			$T_{VJ} = -40^\circ\text{C}$		50	mA
V_{GD}	gate non-trigger voltage	$V_D = \frac{2}{3} V_{DRM}$	$T_{VJ} = 150^\circ\text{C}$		0.2	V
I_{GD}	gate non-trigger current				1	mA
I_L	latching current	$t_p = 10 \mu\text{s}$	$T_{VJ} = 25^\circ\text{C}$		115	mA
		$I_G = 0.3 \text{ A}; di_G/dt = 0.3 \text{ A}/\mu\text{s}$				
I_H	holding current	$V_D = 6 \text{ V}$ $R_{GK} = \infty$	$T_{VJ} = 25^\circ\text{C}$		105	mA
t_{gd}	gate controlled delay time	$V_D = \frac{1}{2} V_{DRM}$	$T_{VJ} = 25^\circ\text{C}$		2	μs
		$I_G = 0.3 \text{ A}; di_G/dt = 0.3 \text{ A}/\mu\text{s}$				
t_q	turn-off time	$V_R = 100 \text{ V}; I_T = 30 \text{ A}; V = \frac{2}{3} V_{DRM}$ $T_{VJ} = 125^\circ\text{C}$	$di/dt = 10 \text{ A}/\mu\text{s}$ $dv/dt = 20 \text{ V}/\mu\text{s}$ $t_p = 200 \mu\text{s}$	150		μs


Package TO-263 (D2Pak-HV)

Symbol	Definition	Conditions	Ratings			
			min.	typ.	max.	
I_{RMS}	RMS current	per terminal			35	A
T_{VJ}	virtual junction temperature		-40		150	°C
T_{op}	operation temperature		-40		125	°C
T_{stg}	storage temperature		-40		150	°C
Weight				1.5		g
F_c	mounting force with clip		20		60	N
$d_{Spp/App}$	creepage distance on surface / striking distance through air	terminal to terminal	4.2			mm
$d_{Spb/Apb}$		terminal to backside	4.7			mm

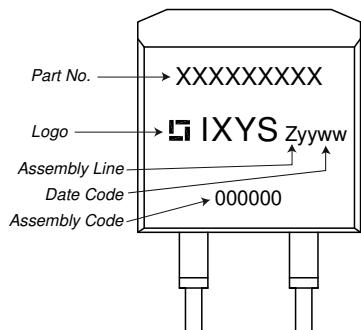
Product Marking

Part description

C = Thyristor (SCR)
 L = High Efficiency Thyristor
 B = Anode gated (up to 1200V)
 30 = Current Rating [A]
 I = Single Anode Gated Thyristor
 1200 = Reverse Voltage [V]
 PZ = TO-263AB (D2Pak) (2HV)

Ordering	Ordering Number	Marking on Product	Delivery Mode	Quantity	Code No.
Standard	CLB30I1200PZ-TRL	CLB30I1200PZ	Tape & Reel	800	516337
Alternative	CLB30I1200PZ-TUB	CLB30I1200PZ	Tube	50	525283


Equivalent Circuits for Simulation
** on die level*
 $T_{VJ} = 150 \text{ }^{\circ}\text{C}$

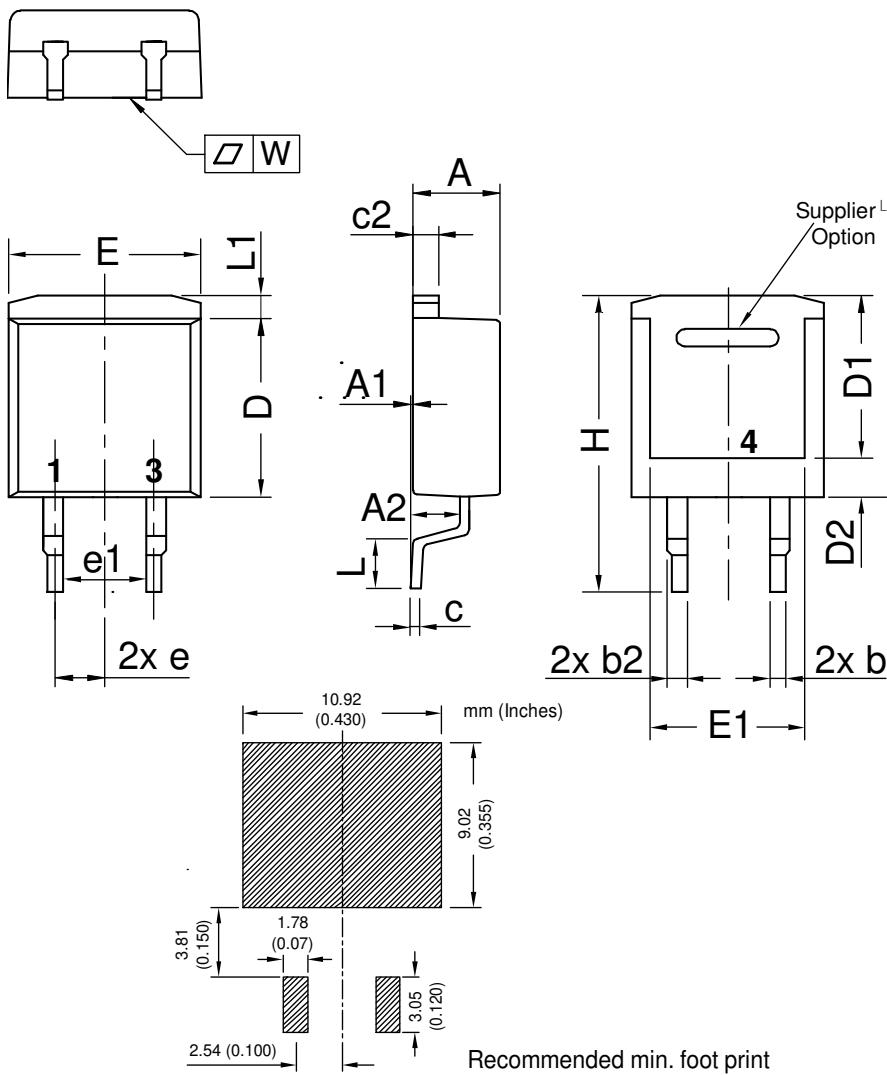Thyristor

$V_{0\max}$ threshold voltage 0.86 V
 $R_{0\max}$ slope resistance * 10 mΩ

Outlines TO-263 (D2Pak-HV)


Dim.	Millimeter		Inches	
	min	max	min	max
A	4.06	4.83	0.160	0.190
A1	typ. 0.10		typ. 0.004	
A2	2.41		0.095	
b	0.51	0.99	0.020	0.039
b2	1.14	1.40	0.045	0.055
c	0.40	0.74	0.016	0.029
c2	1.14	1.40	0.045	0.055
D	8.38	9.40	0.330	0.370
D1	8.00	8.89	0.315	0.350
D2	2.3		0.091	
E	9.65	10.41	0.380	0.410
E1	6.22	8.50	0.245	0.335
e	2,54 BSC		0,100 BSC	
e1	4.28		0.169	
H	14.61	15.88	0.575	0.625
L	1.78	2.79	0.070	0.110
L1	1.02	1.68	0.040	0.066
W	typ. 0.02		0.040	typ. 0.0008
				0.002

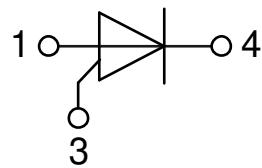All dimensions conform with
and/or within JEDEC standard.



Thyristor

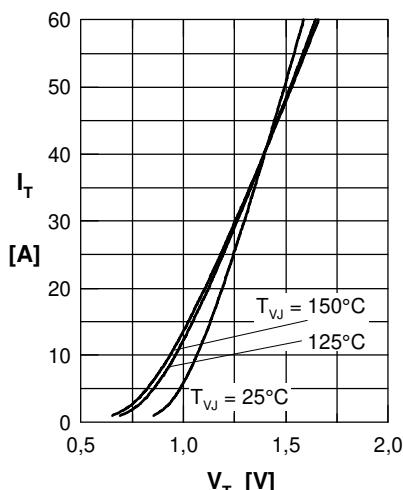


Fig. 1 Forward characteristics

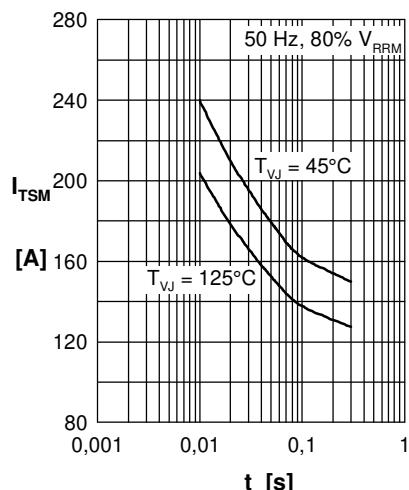


Fig. 2 Surge overload current
 I_{TSM} : crest value, t : duration

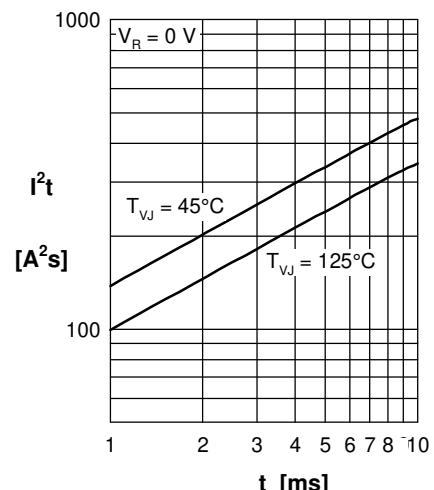


Fig. 3 I^2t versus time (1-10 s)

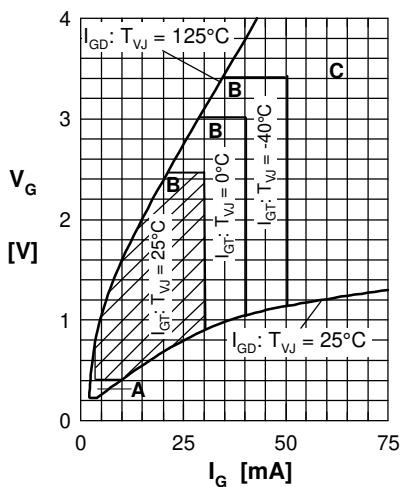


Fig. 4 Gate voltage & gate current
Triggering: A = no; B = possible; C = safe

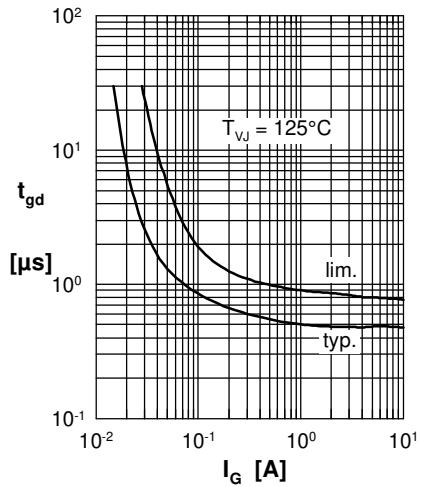


Fig. 5 Gate controlled delay time t_{gd}

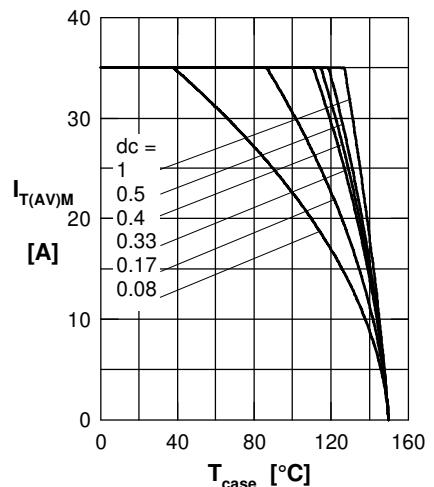


Fig. 6 Max. forward current at case temperature

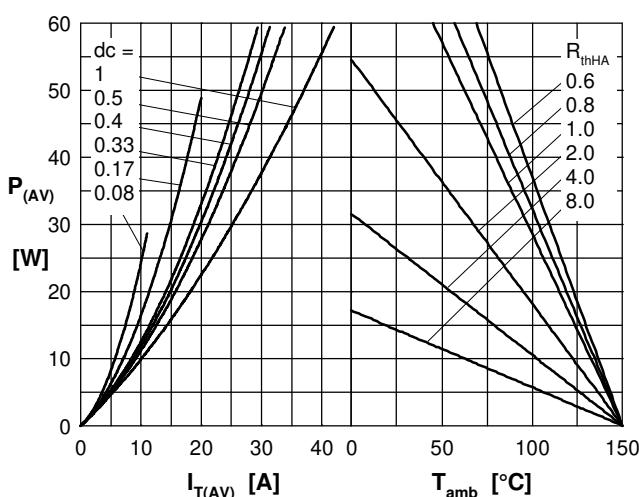


Fig. 7a Power dissipation versus direct output current
Fig. 7b and ambient temperature

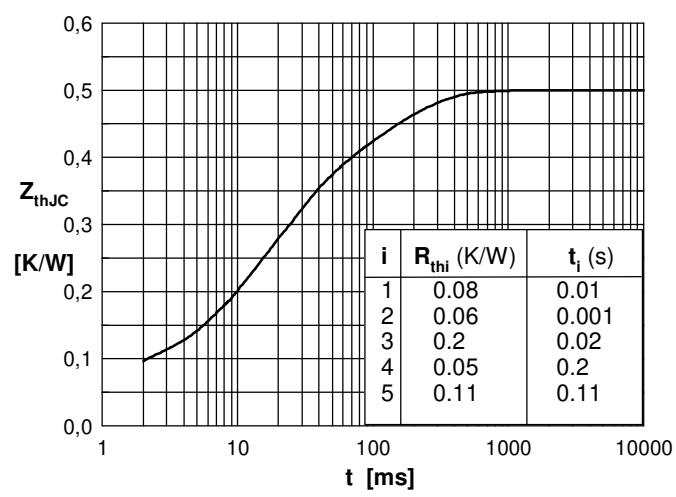


Fig. 7 Transient thermal impedance junction to case