






# About this guide

This guide provides an overview of the Littelfuse technologies used in various aviation and space applications. It is designed to help you quickly find design solutions appropriate to your application.

Торіс	Page
<u>Littelfuse: Everywhere, Every Day</u>	2
Applications	3
Certifications	4
Customized Design	5
Aviation	6–16
Space	17–22
<u>Defense</u>	23–24
About C&K	25
Resources and Support	26

The specifications, descriptions, and illustrative material in this literature are as accurate as known at the time of publication, but are subject to changes without notice. Visit <u>Littelfuse.com</u> for more information.





# Littelfuse: Everywhere, Every Day

Founded in 1927, Littelfuse is a diversified industrial technology manufacturing company empowering a sustainable, connected, and safer world. Across more than 20 countries, and with approximately 18,000 global associates, we partner with customers to design and deliver innovative, reliable solutions.

Littelfuse offers an extensive technology portfolio—fuses, semiconductors, polymers, ceramics, relays, sensors, switches, and more. Serving over 100,000 end customers, our products are found in a variety of industrial, transportation, and electronics end markets—everywhere, every day.

Our history of innovation, combined with our customer-first culture, drives us to collaborate with you to develop safe, reliable products that are energy efficient and compliant with global regulations. We will partner with you to solve complex problems wherever electrical energy is used, bringing design, engineering, and technical expertise to deliver business results.

Littelfuse, Inc. acquired C&K on July 19, 2022. C&K is one of the most recognizable and trusted names in the electromechanical switch industry. C&K's outstanding engineering expertise and high-performance products allow us to offer you a broader product portfolio, expanded footprint, and enhanced distribution channels.

# Why Choose Us

Complementing our wide portfolio of products is a global network of design and technical support expertise. We offer decades of design experience to help you addressapplication challenges and achieve regulatory compliance.

### **Your Single Source**

Our extensive portfolio of high-quality, high-performance, and reliable aviation-specific switches and space-specific connectors is specifically made to withstand harsh aerospace environments.

### **Testing Support**

Littelfuse can help ensure that your products withstand most common threats repeatedly and fail safely under extreme circumstances. We serve as an independent source of assistance as you design by offering lab testing capabilities. With more than 15 lab locations worldwide, Littelfuse labs are equipped to provide testing that includes overcurrent, overvoltage, ESD, temperature, failure analysis, material analysis, and application performance.

### **Application Knowledge**

With over 90 years of experience, C&K has a deep understanding of the aerospace market. Engineers and circuit designers around the world have come to rely on Littelfuse products and application knowledge to support their designs.

### **Global Support**

Littelfuse stays close to customers. With manufacturing, lab, and design facilities located around the globe, our application knowledge and technical support are locally available. We also offer a network of regional customer support offices and hundreds of independent authorized distributor contacts to assist you. Visit Littelfuse.com/contact-us to find local support near you.

### **Standards Compliance Expertise**

Most Littelfuse products comply with a wide range of applicable industry and government guidelines as well as our own rigorous quality and reliability criteria. We continually look forward and adapt to changing requirements so that our products will comply with industry-specific national and international standards and regulations.

Most of the products in this guide are ESA/ESCC and MIL qualified and available for a wide range of applications, from connectors and wiring harnesses for PCBs and antennas to satellites/launchers and space computer systems.

### **Operational Excellence**


With our global manufacturing footprint, Littelfuse is firmly committed to creating quality products at a competitive price. We build quality into our products and services, striving for zero defects in everything we do—thereby reducing costs and increasing your total satisfaction. We strive to exceed your expectations every day.

C&K's AS9100 certification enables us to receive orders directly from around the globe. Product designers can either choose to take advantage of C&K's available portfolio of highly reliable components or benefit from our unmatched custom design capabilities, coordinated and optimized by our integrated engineering, laboratory, and manufacturing teams. Alternatively, customers can work alongside one of our preferred distribution partner to complete their aviation, defense, and space designs.

### **Quality Assurance**

Our global manufacturing facilities abide by strict quality assurance requirements and hold industry specific quality management system registrations.

We've been certified by space agencies since 1981. With more than 3,000 cumulative years in space, we are present in more than 700 satellites spanning all application domains: Earth observation, government/civil communications, security, exploration, navigation, science satellites, launchers, and missions.





# Ariane 5

- Launch Year: 1997
- Orbit: Various
- Launch Location: French Guiana
- Launch Vehicle: Ariane 5
- · Years of Service: Ongoing



# Galileo

**European Global Satellite Navigation System** 

- Launch Year: 2011
- Orbit: Medium Earth Orbit (23,000 km)
- Launch Vehicle: Ariane 5/Soyuz
- Years of Service: 10



### Iridium **Satellite Constellation**

- Launch Year: 2017
- Orbit: About 781 km
- Launch Vehicle: Delta II 7920-10C, Proton-K/17S40, Chang Zheng
- Years of Service: 2

### **C&K Products Power Myriad Applications**

- Satellites/launchers
- Space computer systems
- · Payloads (board-to-board connection)
- · Integrated interconnected systems
- Antenna connections and harnesses
- Test equipment applications
- Cabin, lighting, and lavatory interconnection systems
- · Flight control units



# Meteosat Third Generation

Satellite System

- Launch Year: End of 2022
- Orbit: Geo Orbit (36,000 km)
- Launch Location: French Guiana
- Launch Vehicle: Ariane 5
- Years of Service: About 20



# 03b

Telecommunications Satellite Constellation

- Launch Year: 2013
- Orbit: 8,063 km
- Launch Location: French Guiana
- Launch Vehicle: Soyuz-2/Fregat-MT
- Years of Service: 6



### Gaia

**Space Observatory** 

- Launch Year: 2013
- Orbit: Lissajous orbit (707,000 km)
- Launch Location: French Guiana
- Launch Vehicle: Soyuz-2/Fregat-MT
- Years of Service: About 12

# **Certifications**

### **General Certifications**

- ISO 9001
- ISO 14001
- ISO 50001

### **Aviation, Space, and Defense Certifications**

- ESA: ESCC 3401
- CNES: ASF13-103 (EWIS)
- DLA: MIL M24308
- NASA: GSFC 311P
- AS 9100

### **Hi-REL TVS Diode Certification/Compliances**

- RTCA/DO-160 Standard (Environmental Conditions and Test Procedures for Airborne Equipment)
- MILSTD-704
- MIL-PRF-19500
- AS9100

















We have capabilities allowing for easy design-in that are in compliance with the RTCA/DO-160 Standard.

# Up-screening and Sorting Steps for High Reliability TVS Diodes Are Available.

- Visual monitor in process
- Single wafer lot source
- High temperature storage life
- AS9100 certified manufacturing site
- · X-Ray inspection
- 3 Sigma & dynamic test
- Temperature cycle test
- Reflow (2X)
- · Customized Vbr/lr
- Additional sorting
- HTRB
- H3TRB
- Labeling



# 100% Screen Process

Figure 1. Screen Process

Description	Standard		
100% Vision Inspection	MIL-STD-750: Method 2074		
100% High Temperature Storage Life (168 hrs)	MIL-STD-750: Method 1031		
100% X-Ray inspection	MIL-STD-750: Method 2076		
100% Temperature Cycle Test (-55 to150° C, 20 cycles, dwell time 15 min)	MIL-STD-750: Method 1051		
100% Reflow (2X)	JEDEC J-STD-020		
100% Surge Test (2X)	MIL-STD-750: Method 4066		
100% HTRB 150°C Bias=V <sub>R</sub> (80% breakdown voltage, 96 hrs, and each direction at 96 hrs for Bi-directional products)	MIL-STD-750: Method 1038		
Final Electrical Test( 100% 3 sigma limit, 100% dynamic test and PAT limit)	MIL-STD-750: Method 4016.4021.4011		

Screen	Method	Condition	Requirement		
Surge test	10x1000μS Peak Pulse Waveform	Maximum Clamping Voltage (V <sub>C</sub> ) @Peak Pulse Current (I <sub>PP</sub> )	Sample Size 45, Perform 10x Accept 0 Failures		
Burn-in (HTRB)	MIL-STD-750: Method 1038.5	Applied Voltage 100% V <sub>R</sub> @150° C	Sample Size 45, 340 hrs (680 hours for bi-directional products, each direction 340 hours). Accept 0 Failures		
Electrical tests	-	$I_R@V_RV(_{BR})@I_T$	Sample Size 45, Accept 0 Failures		

Note: Please see our datasheets on website for more details.

# **Aviation**







### **Electrical Wiring Interconnection Systems for (EWISs) Safe Flights**

Littelfuse provides value-added interconnectivity solutions for most commercial aircraft, such as the A320, A330, A340, A350, and A380.

Our cable harness products are deployed in these aircraft for a variety of different applications, including lavatories, overhead compartments, crew rest compartments, galleys, and so forth.

We support our customers by addressing their complex and unique wiring harness requirements (we are currently supplying thousands of different harness variants).

We also support manufacturers of aircraft for VVIPs around the world with our passenger convenient solutions and star light systems.

We have the capability to build sealed and shielded harnesses for different applications, including power, signal, and fiber optic communications.

Our expert engineering, laboratory, and manufacturing teams are available to support our customers with design, development, and integration activities, including on-site at the customer's facility.

The reasons Littelfuse has been identified as a strategic partner by our customers include proximity (due to our global manufacturing footprint), quality, and speed of execution and delivery.

### **Push Button Series**



**PBA** 

This illuminated push button switch offers a solution for aviation applications. It has flexible LED colors and an indicator cap display.

### **Features**

- Illuminated display
- Lightweight
- Short length
- Tactile feedback
- One or two indicator lines
- 3 sizes: 9.5 x 14 mm, 11.5 x 14 mm, and 14 x 14 mm

Scan or click for more information

**Micro-D Connector Series** 



Scan or click for more information



# **MDMB**

This unique product in the micro-D connector series is designed with a removable crimp contact which makes it useful for harness manufacturers.

### **Features**

- Unique design
- Removable crimp contact technology
- All sizes available from 9 to 51 contacts
- Nickel and gold finish
- Associated contacts available

# AeroSplice Series



Scan or click for

# One-Wav

This is a unique patented product design with a one-way connector linking two wires with removable contacts. Replace the hand-splicing process using a standardized solution with D\*MA contact technology.

- Unique design
- Wire-to-wire connect solution
- Saves cost by replacing manual splices with a standard solution
- One-way connector with removable contacts
- Uses standard D\*MA contacts

# AeroSplice Series (continued)




# Four-Way Radial Fixing

This four-way connector links four pairs of wires with removable contacts. Replace the hand-splicing process by using a standardized solution with D\*MA contact technology. It has a compact format and is designed to accept the most popular gauges (20 AWG to 30 AWG).

### **Features**

- Unique design
- Wires-to-wires connection
- Four-way connectors with removable D\*MA contacts
- Stackable
- Can float or fix the insulator using the two holes provided





Scan or click for more information

# Four-Way Axial Fixing

This four-way connector links four pairs of wires with removable contacts. Replace the hand-splicing process by using a standardized solution with D\*MA contact technology. This product has a compact format and is designed to accept the most popular gauges (20 AWG to 30 AWG).

- Unique design
- Wires-to-wires connection
- Four-way connectors with removable D\*MA contacts
- Used to pass through panels







### Avionic Applications and the High Reliability TVS Diodes

We offer a wide portfolio of discrete TVS Diode devices ranging from 200 watt to 30 kW including ultra high power AK families up to 15 kA. Our dedicated design team with AS9100 certified facility provides specialized up-screening services based upon Specification MIL-PRF-19500 for robust Hi-RelTVS Diodes that are suitable selection for applications require higher reliability performance under harsh conditions.

### **Aviation Applications**

- Aviation computing protection
- Engine control unit protection (DO-160 L3/L4)
- Power train/power distribution unit (DO-160 L4/L5)





Figure 2. High Reliability TVS Diodes products

Table 2. Screen Process Description

Series	100% Screen Test Sorting	Group B Test Sorting	PeakPulse Power Rating (W)	Reverse Stand Off Voltage (V <sub>R</sub> )	Minimum Breakdown Voltage (V <sub>BR</sub> )	SMD/ Axial Lead	Package	Compliance and Protection	
								DO-160 / DC Protection	MIL- STD-704
SMAJ-HR	Yes	Yes	400	6.0-45.0	6.67-50	SMD	DO-214AC	Yes	-
SMAJ-HRA	Yes	-	400	6.0-45.0	6.67-50	SMD	DO-214AC	Yes	-
SMBJ-HR	Yes	Yes	600	5.0-170	6.4-189	SMD	DO-214AA	Yes	-
SMBJ-HRA	Yes	-	600	5.0-170	6.4-189	SMD	DO-214AA	Yes	-
SMBLCE-HR	Yes	Yes	600	6.5-70.0	7.22-77.8	SMD	DO-214AA	Yes	-
SMBLCE-HRA	Yes	-	600	6.5-70.0	7.22-77.8	SMD	DO-214AA	Yes	-
SMCG-HR	Yes	Yes	1500	5.0-120	6.4-133	SMD	DO-215AB	Yes	-
SMCG-HRA	Yes	-	1500	5.0-130	6.4-144	SMD	DO-215AB	Yes	-
SMCJ-HR	Yes	Yes	1500	5.0-170	6.4-189	SMD	DO-214AB	Yes	-
SMCJ-HRA	Yes	-	1500	5.0-170	6.4-189	SMD	DO-214AB	Yes	-
SMDJ-HR	Yes	Yes	3000	5.0-170	6.4-189	SMD	DO-214AB	Yes	-
SMDJ-HRA	Yes	-	3000	5.0-170	6.4-189	SMD	DO-214AB	Yes	-
5.0SMDJxxS-HRA	Yes	-	5000	6.0-60.0	6.67-66.7	SMD	DO-214AB	Yes	-
TLP	Yes	Yes	5000	10.0-40.0	11.8-44.4	Axial Leaded	P600	Yes	Yes
TLPA	Yes	-	5000	10.0-40.0	11.8-44.4	Axial Leaded	P600	Yes	Yes
5KP-HR	Yes	Yes	5000	5.0-220	6.4-244	Axial Leaded	P600	Yes	-
5KP-HRA	Yes	-	5000	5.0-220	6.4-244	Axial Leaded	P600	Yes	-
15KPA-HR	Yes	Yes	15000	17.0-280	18.99-312.8	Axial Leaded	P600	Yes	-
15KPA-HRA	Yes	-	15000	17.0-280	18.99-312.8	Axial Leaded	P600	Yes	-
30KPA-HR	Yes	Yes	30000	28.0-345	31.28-384	Axial Leaded	P600	Yes	-
30KPA-HRA	Yes	-	30000	28.0-345	31.28-384	Axial Leaded	P600	Yes	-

Note: Hi-REL Series are also availble for 3 kA/ 6 kA/10 kA/15 kA in AK packages, please contact Littelfuse sales for more details.

# **High Reliability TVS Diodes**



# **5KP-HR Series**

The 5KP-HR High Reliability Series is designed specifically to protect sensitive electronic equipment from voltage transients induced by lightning and other transient voltage events.

### **Features**

- 5 kW peak pulse capability at 10/1000µs waveform
- P600 package
- 100% screen process and Group B test
- High reliability devices with fabrication and assembly lots traceability
- DO-160 / DC protection



# **5KP-HRA Series**

The 5KP-HRA High Reliability Series is designed specifically to protect sensitive electronic equipment from voltage transients induced by lightning and other transient voltage events.

### **Features**

- 5 kW peak pulse capability at 10/1000µs waveform
- P600 package
- 100% screen process
- High reliability devices with fabrication and assembly lots traceability
- DO-160 / DC protection



# **TLP Series**

The TLP Series is packaged in a highly reliable industry standard P600 axial leaded package and is designed to provide precision overvoltage protection for sensitive electronics.

- 5 kW peak pulse capability at 10/1000µs waveform
- P600 package
- 100% screen process and Group B test
- High reliability devices with fabrication and assembly lots traceability
- DO-160 / DC protection
- Designed to protect sensitive electronics from 50ms Square Test Waveform
- MIL-STD-704

### 11

# High Reliability TVS Diodes (continued)



# **TPLA Series**

The TLPA Series is packaged in a highly reliable industry standard P600 axial leaded package and is designed to provide precision overvoltage protection for sensitive electronics.

### **Features**

- 5 kW peak pulse capability at 10/1000µs waveform
- P600 package
- 100% screen process
- High reliability devices with fabrication and assembly lots traceability
- DO-160 / DC protection
- Designed to protect sensitive electronics from 50ms Square Test Waveform
- MIL-STD-704



# 15KPA-HR Series

The 15KPA-HR High Reliability Series is designed specifically to protect sensitive electronic equipment from voltage transients induced by lightning and other transient voltage events.

### **Features**

- 15 kW peak pulse capability at 10/1000µs waveform
- P600 package
- 100% screen process and Group B test
- High reliability devices with fabrication and assembly lots traceability
- DO-160 / DC protection



# 15KPA-HRA Series

The 15KPA-HRA High Reliability Series is designed specifically to protect sensitive electronic equipment from voltage transients induced by lightning and other transient voltage events.

- 15 kW peak pulse capability at 10/1000µs waveform
- P600 package
- 100% screen process
- High reliability devices with fabrication and assembly lots traceability
- DO-160 / DC protection

# 12

# High Reliability TVS Diodes (continued)



# 30KPA-HR Series

The 30KPA-HR High Reliability Series is designed specifically to protect sensitive electronic equipment from voltage transients induced by lightning and other transient voltage events.

### **Features**

- 30 kW peak pulse capability at 10/1000µs waveform
- P600 package
- 100% screen process and Group B test
- High reliability devices with fabrication and assembly lots traceability
- DO-160 / DC protection



# 30KPA-HRA Series

The 30KPA-HRA High Reliability Series is designed specifically to protect sensitive electronic equipment from voltage transients induced by lightning and other transient voltage events.

### **Features**

- 30 kW peak pulse capability at 10/1000µs waveform
- P600 package
- 100% screen process
- High reliability devices with fabrication and assembly lots traceability
- DO-160 / DC protection



# 5.0SMDJxxS-HRA Series

The 5.0SMDJxxS-HRA High Reliability series is designed specifically to protect sensitive electronic equipment from voltage transients induced by lightning and other transient voltage events. These are available with a variety of upscreening options for enhanced reliability.

- 5 kW peak pulse capability at 10/1000µs waveform
- Surface mount DO-214AB package
- 100% screen process
- High reliability devices with fabrication and assembly lots traceability
- DO-160 / DC protection





Scan or click for more information



The SMAJ-HR High Reliability series is designed specifically to protect sensitive electronic equipment from voltage transients induced by lightning and other transient voltage events. These are available with a variety of upscreening options for enhanced reliability.

### **Features**

- 400W peak pulse capability at 10/1000µs waveform
- Surface mount DO-214AC package
- 100% screen process and Group B test
- High reliability devices with fabrication and assembly lots traceability
- DO-160 / DC Protection



Scan or click for more information



# **SMAJ-HRA Series**

The SMAJ-HRA High Reliability series is designed specifically to protect sensitive electronic equipment from voltage transients induced by lightning and other transient voltage events. These are available with a variety of upscreening options for enhanced reliability.

### **Features**

- 400W peak pulse capability at 10/1000µs waveform
- Surface mount DO-214AC package
- 100% screen process
- High reliability devices with fabrication and assembly lots traceability
- DO-160 / DC Protection



Scan or click for



# **SMBJ-HR Series**

The SMBJ-HR High Reliability series is designed specifically to protect sensitive electronic equipment from voltage transients induced by lightning and other transient voltage events. These are available with a variety of upscreening options for enhanced reliability.

- 600W peak pulse capability at 10/1000µs waveform
- Surface mount DO-214AA package
- 100% screen process and Group B test
- High reliability devices with fabrication and assembly lots traceability
- DO-160/DC Protection

### 14

# **High Reliability TVS Diodes** (continued)







# **SMBJ-HRA Series**

The SMBJ-HRA High Reliability series is designed specifically to protect sensitive electronic equipment from voltage transients induced by lightning and other transient voltage events. These are available with a variety of upscreening options for enhanced reliability.

### **Features**

- 1600 W peak pulse capability at 10/1000µs waveform
- Surface mount DO-214AA package
- 100% pcreen process
- · High reliability devices with fabrication and assembly lots traceability
- DO-160 / DC Protection



Scan or click for more information

# **SMBLCE-HR Series**

The SMBLCE-HR High Reliability series is designed specifically to protect sensitive electronic equipment from voltage transients induced by lightning and other transient voltage events. These are available with a variety of upscreening options for enhanced reliability.

### **Features**

- 600 W peak pulse capability at 10/1000µs waveform
- Surface mount DO-214AA package
- 100% screen process and Group B test
- High reliability devices with fabrication and assembly lots traceability
- Unidirectional
- DO-160







# **SMBLCE-HRA Series**

The SMBLCE-HRA High Reliability series is designed specifically to protect sensitive electronic equipment from voltage transients induced by lightning and other transient voltage events. These are available with a variety of upscreening options for enhanced reliability.

- 600 W peak pulse capability at 10/1000µs waveform
- Surface mount DO-214AA package
- 100% screen process
- High reliability devices with fabrication and assembly lots traceability
- Unidirectional
- DO-160



# **SMCG-HR Series**

The SMCG-HR High Reliability series is designed specifically to protect sensitive electronic equipment from voltage transients induced by lightning and other transient voltage events. These are available with a variety of upscreening options for enhanced reliability.

### **Features**

- 1.5 kW peak pulse capability at 10/1000µs waveform
- Surface mount DO-215AB package
- 100% screen process and Group B test
- · High reliability devices with fabrication and assembly lots traceability
- L bend lead forming gives best solderbility for Hi reliability application
- DO-160/DC Protection



# **SMCG-HRA Series**

The SMCG-HRA High Reliability series is designed specifically to protect sensitive electronic equipment from voltage transients induced by lightning and other transient voltage events. These are available with a variety of upscreening options for enhanced reliability.

### **Features**

- 1.5 kW peak pulse capability at 10/1000µs waveform
- Surface mount DO-215AB package
- 100% pcreen process
- · High reliability devices with fabrication and assembly lots traceability
- L bend lead forming gives best solderbility for Hi reliability application
- DO-160/DC Protection







# **SMCJ-HR Series**

The SMCJ-HR High Reliability series is designed specifically to protect sensitive electronic equipment from voltage transients induced by lightning and other transient voltage events. These are available with a variety of upscreening options for enhanced reliability.

- 1.5 kW peak pulse capability at 10/1000µs waveform
- Surface mount DO-214AB package
- 100% screen process and Group B test
- High reliability devices with fabrication and assembly lots traceability
- DO-160/DC Protection

### 16

# **High Reliability TVS Diodes** (continued)







# **SMCJ-HRA Series**

The SMCJ-HRA High Reliability series is designed specifically to protect sensitive electronic equipment from voltage transients induced by lightning and other transient voltage events. These are available with a variety of upscreening options for enhanced reliability.

### **Features**

- 1.5 kW peak pulse capability at 10/1000µs waveform
- Surface mount DO-214AB package
- 100% Screen Process
- · High reliability devices with fabrication and assembly lots traceability
- DO-160/DC Protection



Scan or click for more information



# **SMDJ-HR Series**

The SMDJ-HR High Reliability series is designed specifically to protect sensitive electronic equipment from voltage transients induced by lightning and other transient voltage events. These are available with a variety of upscreening options for enhanced reliability.

### **Features**

- 3 kW peak pulse capability at 10/1000µs waveform
- Surface mount DO-214AB package
- 100% screen process and Group B test
- High reliability devices with fabrication and assembly lots traceability
- DO-160/DC Protection








# **SMDJ-HRA Series**

The SMDJ-HRA High Reliability series is designed specifically to protect sensitive electronic equipment from voltage transients induced by lightning and other transient voltage events. These are available with a variety of upscreening options for enhanced reliability.

- 3 kW peak pulse capability at 10/1000µs waveform
- Surface mount DO-214AB package
- 100% Screen Process
- High reliability devices with fabrication and assembly lots traceability
- DO-160/DC Protection

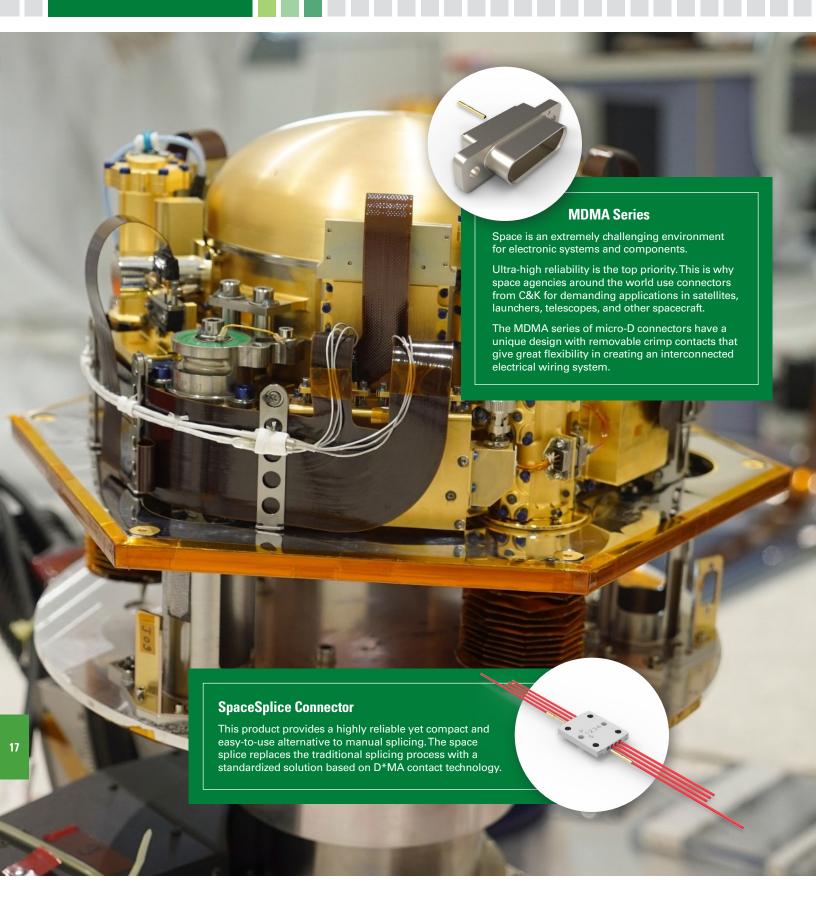





### **Harnesses for Most Demanding Environments**

The interconnection systems used in space applications are different to other applications.

The challenging environment in space requires high quality, light weight, low outgassing interconnection systems that can support long and arduous mission lifetimes.

We have been supporting our customers' space applications—including launchers, computers, satellites, space probes, and other payloads—for decades. Our wiring harness solutions are complemented by our connector offerings and supported by our global footprint.

All wiring harnesses intended for space applications are created in an ISO8 clean room and manufactured on a mock-up table with component dummies/brackets.

Our proven tradition of delivering the highest quality products for 40+ years speaks volumes with respect to the trust our customers place in us.

### **D-Sub Connector Series**



# D\*M

This is the largest standard used in rectangular connectors. It's mainly employed in equipment used for data transfers. The robustness of the design and its maturity make it a reference in the space field.

### **Features**

- All standard and high-density sizes
- Solder cup, straight, and 90° bent terminations (US and EU footprints)
- Brackets and fixing options



Scan or click for more information

# D\*MA

Our D-sub connector is designed with a removable crimp contact, making it useful for harness manufacturers. This gives great flexibility in creating an interconnected electrical wiring system.

### **Features**

- All standard and high-density sizes
- With or without contacts
- Standard, large, and reduced crimp contact sizes
- Fixing options




# Combo

The combo connector has the same shape and dimensions of a standard D-sub connector and has the combination layout which accommodates power and RF contacts. A wide range of combinations is available with removable 8 AWG contacts.

- D-sub connector with a combination of signal, power, and coax contacts
- Solder cup, straight, 90° bent, and crimp terminations

# **D-Sub Connector Series** (continued)



# D\*J

This D-sub connector with a ceramic capacitor allows signals to be filtered with a technology suitable for space applications.

### **Features**

- Filter connectors under the CSFR165 specification (according to European Space Components Coordination 3405)
- Capacitance at 1k Hz is 4,000 to 12,000 pF
- Operates in medium frequency
- 50 dB min, attenuation at 100 MHz





Savers

Connector savers are the solution for preventing contact damage. They protect connectors that are mated and unmated frequently during all phases of tests and programs.

### **Features**

- All sizes for standard, high-density, and combo connectors
- With or without contacts





# Accessories

Connectors must be used with accessories that guarantee good assembly, secure fixing, and protection of terminations. We offer a large range of accessories that support the safe use of our connectors.

### **Features**

- Jackposts and jackscrews for connectors and savers
- Lightweight backshells, each with a nickel and gold finish
- Several outlets: straight, 45°, 90°, cylindrical, and elliptical
- Dust caps
- Extraction tools, crimp tools, locators, retention tools, and more

10



Scan or click for more information

# 20

# **Micro-D Connector Series**





# **MDM**

This is a solution for applications that require small and high-density contacts (the pitch is half the size of a D-sub connector). These Micro-D connectors are manufactured with lightweight aluminum shells.

### **Features**

- All sizes available from 9 to 51 contacts
- Terminations: solder cup, straight, narrow profile, 90° PCB bent, and wired
- Brackets and fixing options
- Nickel and gold finish



# **MDMA**

This unique product in the micro-D connector series is designed with removable crimp contacts. This is useful for harness manufacturers; it gives them great flexibility when creating an interconnected electrical wiring system.

### **Features**

- Unique design
- Removable crimp contact technology
- All sizes available from 9 to 51 contacts
- Nickel and gold finish
- Associated contacts available

Scan or click for more information





# Savers

Connector savers are the solution for preventing contact damage. They protect connectors that are mated and unmated frequently during all phases of tests and programs.

### **Features**

- All sizes available from 9 to 51 contacts
- Fixed contacts
- · Nickel finish only

Scan or click for more information



# Micro-D Connectors Series (continued)



# **Accessories**

Connectors are recommended to be used with accessories that guarantee good assembly, secure fixing, and the protection of terminations. We offer a large range of accessories for the safe use of our connectors.

### **Features**

- Jackposts and jackscrews for connectors and savers
- · Lightweight backshells, each with a nickel and gold finish
- Several outlets: straight, 45°, cylindrical, and elliptical
- Extraction tools, crimp tools, locators, retention tools, and more

Scan or click for more information



# **MTB Connector Series**





MTB1

This in-line contact connector without a protective shell uses micro-D contact technology. It's useful in the computer testing process.

### **Features**

- From 2 to 51 in-line contacts
- Solder cup, straight, 90° PCB bent, and wired terminations
- Polarization, latching, and guide post options

# SpaceSplice Series



# One-Way

This unique, patented product design is a one-way connector linking two wires with removable contacts. Replace the hand-splicing process using a standardized solution with D\*MA contact technology.

### **Features**

- Unique design
- Wire-to-wire connection
- Saves cost by replacing manual splices with a standard solution
- One way connector with removable contacts
- Uses standard D\*MA contacts

Scan or click for

more information

Scan or click for


more information

# Four-Way Radial Fixing

This four-way connector links two wires with removable contacts. Replace the hand-splicing process by using a standardized solution with D\*MA contact technology. This SpaceSplice has a compact format and accepts the most popular gauges (20 AWG to 30 AWG).

### **Features**

- Unique design
- Wires-to-wires connection
- Saves cost by replacing manual splices with a standard solution
- Four-way connector with removable contacts
- Uses standard D\*MA contacts



# Four-Way Axial Fixing

This is a four-way connector that links two wires with removable contacts. Replace the hand-splicing process by using a standardized solution with D\*MA contact technology—one that has a compact format and accepts the most popular gauges (20 AWG to 30 AWG)

### **Features**

- Unique design
- Wires-to-wires connection
- Four-way connectors with removable D\*MA contacts
- Uses to pass through panels

# Scan or click for more information

# Interposer

The interposer provides a board-to-board connection with a custom solderless solution. It ensures reliability and performance, and it has the flexibility to incorporate specific application features. It also has a stable contact resistance; the electrical contact function is decoupled from the pressure applied by a spring.

### Features

- Custom solderless solution
- Spring-probe contact technology
- No soldering process
- Easy-build interposer technology

# **Custom Design**

C&K's expertise and capabilities allow for the design and manufacturing of custom products and solutions that match the specific requirements of our customers. C&K's custom products and solutions cover terminations, cable harnesses, rear potting, hardware, and backshells.

# Defense



# Our Electrical Wiring Interconnection System

meets the ruggedization and high reliability requirements of a wide variety of defense applications.

The cable harnesses used in defense applications require sealing and shielding to protect them against EMI/EMC interference and allow them to be deployed in harsh environments.

Our proven engineering and manufacturing competencies and expertise in building these harnesses means our customers rely on us for applications where failure is not an option.

We have partnered with defense OEMs around the globe on many prestigious programs, including ground defense and weapon systems.

Our industry-specific management certifications—including EN9100, ISO14001 and VG—provide yet one more reason for potential customers to consider us as a future partner for their interconnectivity needs.







# **About C&K®**

On July 19, 2022, Littelfuse, Inc. acquired C&K, which has provided innovative customer solutions for over 90 years. With worldwide manufacturing, engineering, and sales support, C&K is focused on delivering customer satisfaction with superior products, processes, and services. Through close partnerships with our customers, we continue to expand our offering to fully integrate our core switch products into customer-specific interface solutions.

Satellites, launchers, and any other systems for space applications require high-reliability products as operating conditions can be extreme. C&K offers a large range of ESA- and defense-qualified products to cope with vibration, radiation, magnetism, and corrosion issues and provides the high-quality and reliable solutions demanded by harsh environmental conditions. We also offer custom designed solutions, coordinated and optimized by our integrated engineering, laboratory, and manufacturing groups.

E.I.S. Electronics is now also part of Littelfuse and has long-standing experience in Electrical Wiring Interconnection tasks in many demanding systems.





# **Additional Resources**

**High Reliability TVS Diodes Technology Brief** 

This brief provides an overview of Hi-Reliability TVS Diodes that are suitable for applications requiring higher reliability performance under harsh conditions.

Scan or click to download



**Circuit Protection Products Selection Guide** 

This guide provides a summary of key circuit protection consideration factors, descriptions of the technologies Littelfuse offers, and product selection tables. It is designed to help you quickly find a protection solution appropriate to your application.

Scan or click for download



### **Sensing Products Selection Guide**

This guide provides an overview of magnetic and temperature sensing technologies, key consideration factors, descriptions of technologies Littelfuse offers, and product selection tables to help you quickly find the sensing solution appropriate for your application.



for download

Scan or click

### **Power Semiconductor Catalog**

This catalog represents the powerful combination of IXYS: A LittelfuseTechnology. It offers a comprehensive portfolio of advanced power semiconductor technologies, including silicon and wide bandgap solutions in discrete and module packages.

# An Extension of Your Team

Our engineers are available to help identify potential issues and provide product recommendations to solve problems.


For aviation, defense, or space support, email: aerospacesupport@littelfuse.com

### **Application and Field Support**

Our experienced product and application engineers work step by step with customers from design to installation to determine the best solution. Contact us today:

<u>Littelfuse.com/contactus.aspx</u>

©2023 Littelfuse, Inc. Information furnished is believed to be accurate and reliable However, users should independently evaluate the suitability of and test each product selected for their own applications. Littelfuse products are not designed for, and may not be used in, all applications. Read complete Disclaimer Notice at https://www.littelfuse.com/legal/disclaimers/product-disclaimer.aspx

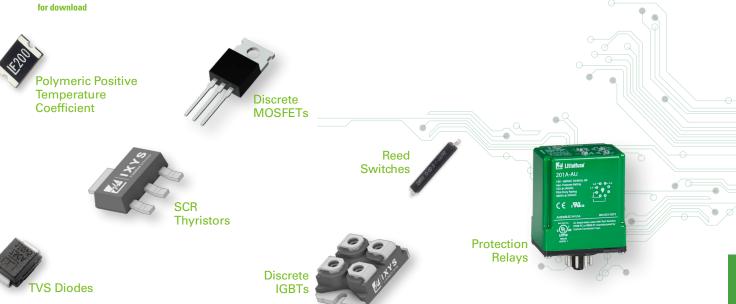





# LOCAL RESOURCES FOR A GLOBAL MARKET







Disclaimer notice: The information furnished here is believed to be accurate and reliable. However, users should independently evaluate the suitability of and test each product selected for their own applications. Littelfuse products are not designed for, and may not be used in, all applications. Read the complete disclaimer notice at <a href="https://www.littelfuse.com/product-disclaimer">www.littelfuse.com/product-disclaimer</a>.



www.Littelfuse.com ©2023 Littelfuse, Inc. ■ EC115Nv0423