





REVISION		
REV	DATE	DESCRIPTION
A	9/10/19	521210GCP - RELEASE MRY
B	11/2/22	525830ECP/C - ADD LABEL LOCATION MRY
C	4/30/25	528858ECP/D - ADD NEW VIEW JTM

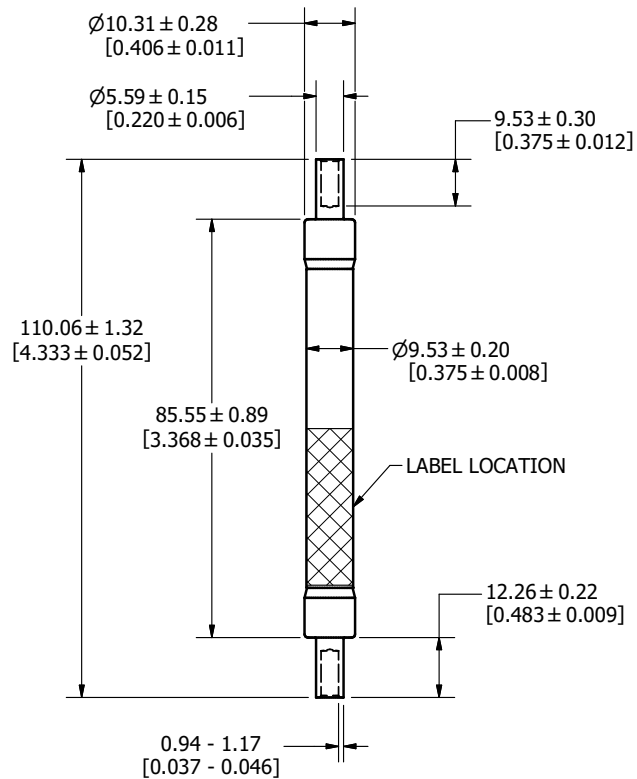

$\varnothing 3.56 \pm 0.10$   
 $[\varnothing 0.140 \pm 0.004]$   
**25A - 32A**

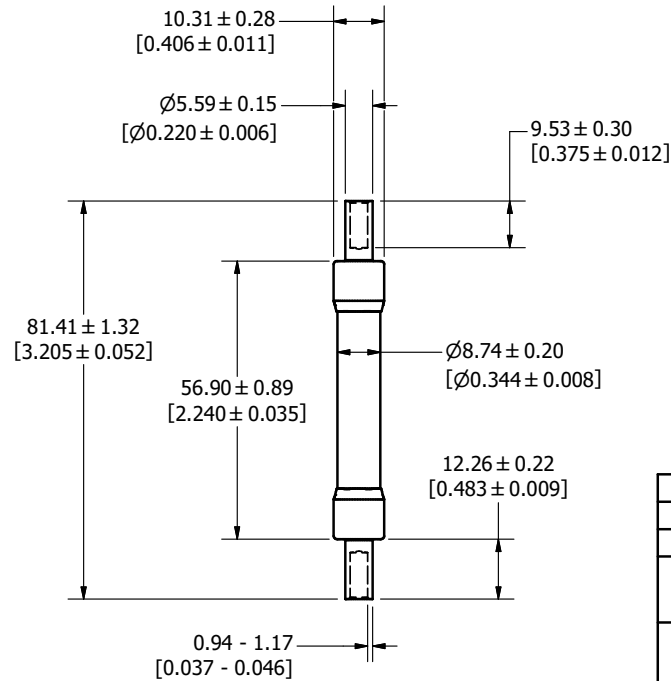

$\varnothing 3.56 \pm 0.10$   
 $[\varnothing 0.140 \pm 0.004]$   
**5A - 6A**

<S>	CRITICAL CHARACTERISTIC FOR PART SAFETY/COMPLIANCE		
●	DENOTES CRITICAL CHARACTERISTICS.		
CPK	DENOTES CPK DIMENSIONS, -MINIMUM CPK VALUE		
(ST)	DENOTES A CHARACTERISTIC THAT PROVIDES AN INDICATION OF PROCESS PERFORMANCE. PROCEDURE FOR MEASUREMENT AND TRACKING TO BE DEFINED IN LITTELFUSE INSPECTION INSTRUCTIONS.		
CP	DENOTES CP DIMENSIONS, -MINIMUM CP VALUE MUST BE WITHIN THE DIMENSIONAL LIMITATIONS SHOWN ON DRAWING AND INITIALLY LOCATED TO ALLOW FOR MAXIMUM TOOL LIFE.		
MATL SPEC		FINISH	
DRW myork	DATE 8/12/2019	SCALE NTS	FINISH GOOD WT GRAMS/PIECE
UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN MILLIMETERS, DIMENSIONS IN BRACKETS [ ] ARE INCHES DIMENSIONING AND DO NOT INCLUDE PLATING. TOLERANCING TO BE INTERPRETED IN ACCORDANCE WITH ANSI Y14.5M-1994			
3RD ANGLE PROJECTION			
			
TITLE			
SPXI-M SERIES OUTLINE			
 <b>Littelfuse®</b> CHICAGO, ILLINOIS 60631		REVISION C	DRWG NO. OL-SPXI000M
			SHEET 1 OF 1